

Microsoft Entra ID Integration Guide

Yeastar P-Series Software Edition

Version: 1.0

Date: 2025-12-03



Contents

Overview.....	1
Set up Microsoft Entra ID Integration.....	3
Integrate Yeastar P-Series Software Edition with Microsoft Entra ID.....	3
Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition.....	15
Synchronize Groups from Microsoft Entra ID to Yeastar P-Series Software Edition.....	24
Synchronize Microsoft Outlook Contacts to Yeastar P-Series Software Edition.....	27
Enable Microsoft Teams User Presence Synchronization.....	34
Allow Users to Log in to Linkus UC Clients with SSO.....	37
Manage Microsoft Entra ID Integration.....	40
Schedule Automatic Directory Synchronization.....	40
Manually Perform a Directory Synchronization.....	41
Update Client Secret for Microsoft Entra ID Integration.....	41
Pause Microsoft Entra ID Synchronization.....	42
Disable Microsoft Entra ID Integration.....	45
Disconnect Microsoft Entra ID Integration.....	46

Microsoft Entra ID (Azure Active Directory) Integration Guide

Microsoft Entra ID (formerly Azure Active Directory or Azure AD) is a cloud-based identity and access management service. By integrating Yeastar P-Series Software Edition with Microsoft Entra ID, you can synchronize the users and groups from Microsoft Entra ID to PBX, and allow the synced users to securely log in to Linkus UC Clients with Single Sign-on (SSO) by their Microsoft accounts.

Requirements

Item	Requirement
Microsoft Entra ID	Free, Office 365 apps, Premium P1, or Premium P2
Yeastar PBX Server	• Firmware: Version 83.21.0.66 or later • Network: The PBX can be remotely accessed via a domain name. For more information about the configuration, see the following topics: ◦ Configure Network for Remote Access by a Yeastar FQDN ◦ Configure Network for Remote Access by a Yeastar Domain Name ◦ Configure Network for Remote Access by a Domain Name

Key features

The integration of Yeastar P-Series Software Edition and Microsoft Entra ID provides the following key features:

User and group synchronization

The integration provides one-way synchronization, mapping the users and groups from Microsoft Entra ID to PBX's directory. Changes made on the synced users and groups within the Microsoft Entra ID will be automatically updated to PBX, thus implementing automated administration.

Auto extension assignment for users synced from Microsoft Entra ID

PBX automatically creates and assigns extensions for the synced users, via which the users can utilize the unified communications features of the PBX.

Single Sign-on (SSO)

PBX supports a secure Single Sign-on (SSO) feature, allowing the synced users to securely log in to Linkus UC Clients by their Microsoft accounts.

Outlook contacts synchronization

One-way Synchronization of Outlook contacts to PBX and Linkus UC Clients, including personal Outlook contacts and shared contacts from Outlook shared mailboxes.

Teams user presence synchronization

Automatically synchronize the Teams user presence of the synced users' with their PBX extension presence.

Objectives

This integration guide provides detailed instructions on how to configure and manage Microsoft Entra ID integration.

Set up Microsoft Entra ID integration

- [Integrate Yeastar P-Series Software Edition with Microsoft Entra ID](#)
- [Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition](#)
- [Synchronize Groups from Microsoft Entra ID to Yeastar P-Series Software Edition](#)
- [Synchronize Microsoft Outlook Contacts to Yeastar P-Series Software Edition](#)
- [Enable Microsoft Teams User Presence Synchronization](#)
- [Allow Users to Log in to Linkus UC Clients with SSO](#)

Manage Microsoft Entra ID integration

- [Schedule Automatic Directory Synchronization](#)
- [Manually Perform a Directory Synchronization](#)
- [Update Client Secret for Microsoft Entra ID Integration](#)
- [Pause Microsoft Entra ID Synchronization](#)
- [Disable Microsoft Entra ID Integration](#)
- [Disconnect Microsoft Entra ID Integration](#)

Set up Microsoft Entra ID Integration

Integrate Yeastar P-Series Software Edition with Microsoft Entra ID

This topic describes how to integrate Yeastar P-Series Software Edition with Microsoft Entra ID (Azure Active Directory) .



Note:

Avoid using one application to connect to two or more PBXs, otherwise certain features may not work.

Requirements

Item	Requirement
Microsoft Entra ID	Free, Office 365 apps, Premium P1, or Premium P2
Yeastar PBX Server	• Firmware: Version 83.21.0.66 or later • Network: The PBX can be remotely accessed via a domain name. For more information about the configuration, see the following topics: ◦ Configure Network for Remote Access by a Yeastar FQDN ◦ Configure Network for Remote Access by a Yeastar Domain Name ◦ Configure Network for Remote Access by a Domain Name

Prerequisites

Before you begin, make sure the followings are ready:

- Your organization already has a Microsoft Entra tenant.
- Use a Microsoft account with **Global Administrator** privilege to implement the integration.
- You have configured network for remote access by a domain name.


Procedure

- [Step 1. Obtain redirect URIs from PBX](#)
- [Step 2. Register an application in Microsoft Entra tenant](#)
- [\(Optional\) Step 3. Add SSO redirect URI to the Microsoft Entra application](#)
- [Step 4. Grant permissions to the Microsoft Entra application](#)
- [Step 5. Generate a client secret for the Microsoft Entra application](#)
- [Step 6. Connect PBX and Microsoft Entra ID](#)

Step 1. Obtain redirect URIs from PBX

Obtain redirect URIs from Yeastar P-Series Software Edition, you will need the information when configuring a Microsoft Entra application for the integration.

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Click **Integrate** beside **Microsoft 365**.
3. In the **App Registration** section, select and note down the following redirect URIs.

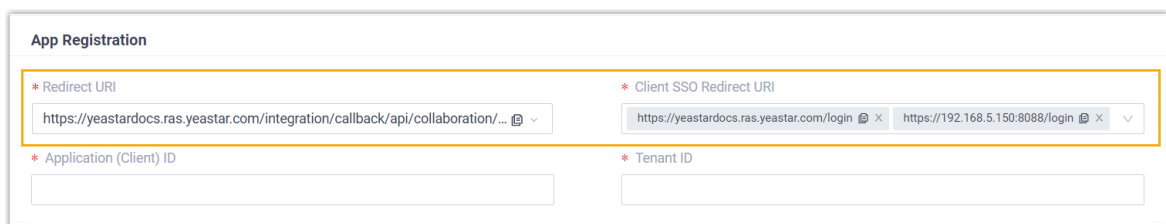

The screenshot shows the 'App Registration' form. It contains the following fields and values:


- * Redirect URI:** `https://yeastardocs.ras.yeastar.com/integration/callback/api/collaboration/...`
- * Client SSO Redirect URI:** `https://yeastardocs.ras.yeastar.com/login` and `https://192.168.5.150:8088/login`
- * Application (Client) ID:** (Empty)
- * Tenant ID:** (Empty)

- **Redirect URI:** Used to specify the location to which you are redirected after the integration authentication is completed.
- **Client SSO Redirect URI:** Used to set up the Single Sign-on (SSO) feature of Linkus UC Clients.


Step 2. Register an application in Microsoft Entra tenant

Register a Microsoft Entra application that will be used to connect Yeastar P-Series Software Edition and Microsoft Entra ID.

1. Log in to [Microsoft Azure Portal](#) with the **Microsoft Global Administrator account**.
2. In the search bar, search and select **Microsoft Entra ID** service to enter your organization's directory.

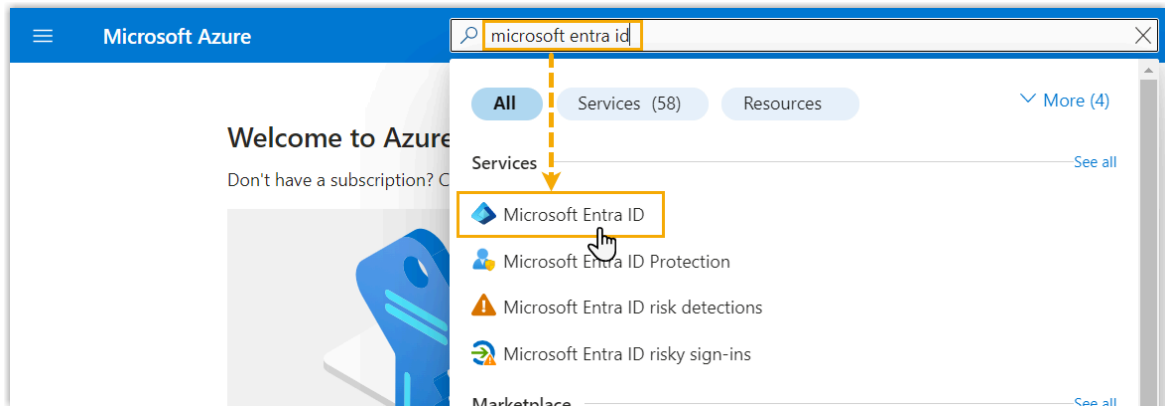

3. On the left navigation bar of organization's directory, go to **App registrations**, then click **New registration**.

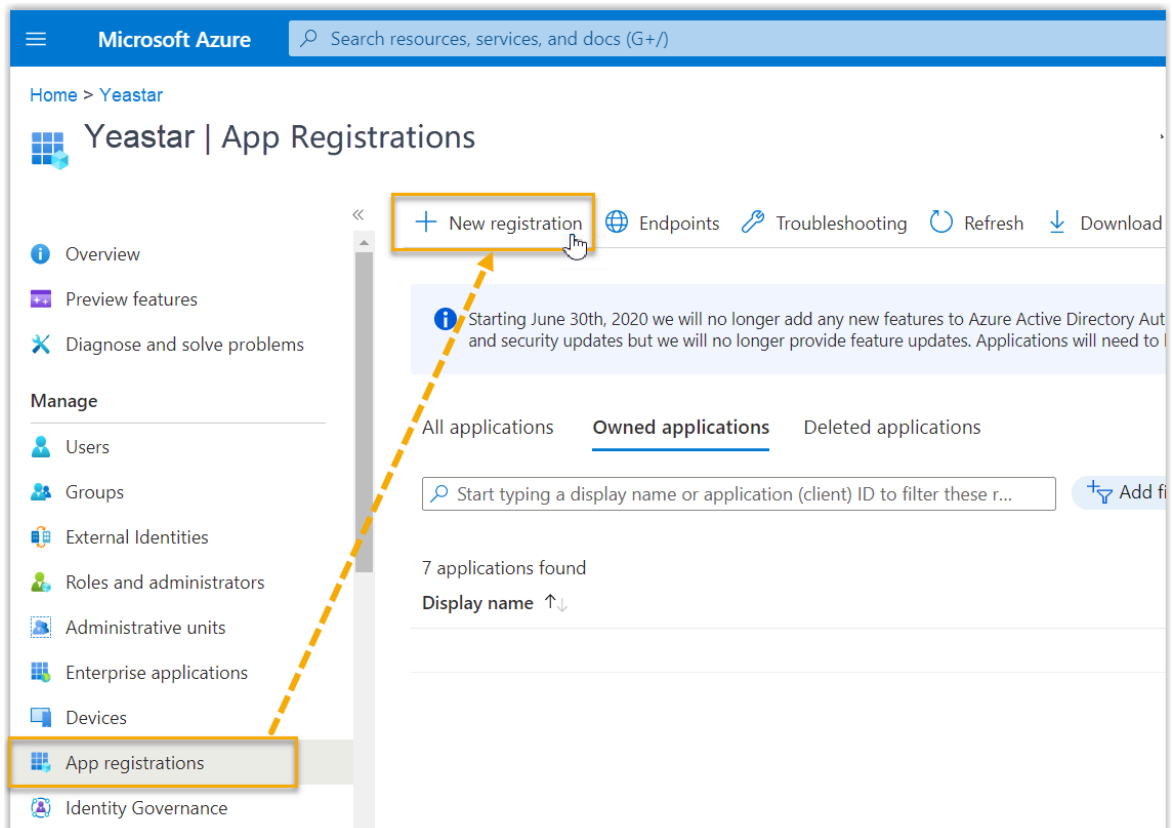

4. In the **Register an application** page, do as follows:

Microsoft Azure

Search resources, services, and docs (G+/)

Home > Yeastar | App registrations

Register an application

*** Name**

The user-facing display name for this application (this can be changed later).

Yeastar_P_series_PBX ✓

Supported account types

Who can use this application or access this API?

☒ Accounts in this organizational directory only (Yeastar - Single tenant)

☐ Accounts in any organizational directory (Any Azure AD directory - Multitenant)

☐ Accounts in any organizational directory (Any Azure AD directory - Multitenant) and personal Microsoft accounts (e.g. Skype, Xbox)

☐ Personal Microsoft accounts only

[Help me choose...](#)

Redirect URI (optional)

We'll return the authentication response to this URI after successfully authenticating the user. Providing this now is optional and it can be changed later, but a value is required for most authentication scenarios.

Select a platform ▼

Public client/native (mobile & desktop)

Web

Single-page application (SPA)

[Platform Policies](#)


https://yeastardocs.ras.yeastar.com/integration/callback/api/collabor...

Register

- a. Enter the registration information of the application.
 - **Name:** Specify a name to help you identify the application.
 - **Supported account types:** Select **Accounts in this organizational directory only**.
 - **Redirect URI:** In the **Select a platform** drop-down list, select **Web**, then paste the [Redirect URI](#) obtained from the PBX.
- b. Click **Register**.

A Microsoft Entra application is registered successfully.


The **Application (client) ID** and **Directory (tenant) ID** of the application is displayed on the **Overview** page. Note them down as you will need to fill them into the PBX later.

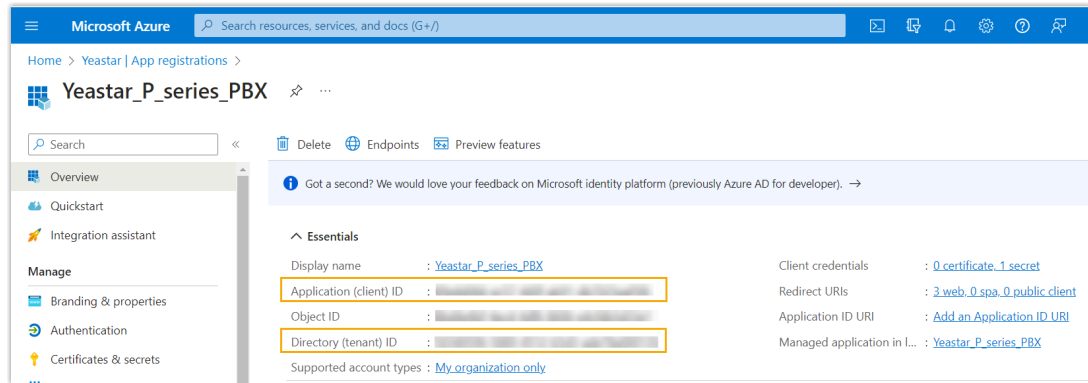


(Optional) Step 3. Add SSO redirect URI to the Microsoft Entra application

If you want to implement Single Sign-on (SSO) to allow the users synced from Microsoft Entra ID to log in to Linkus UC Clients by their Microsoft accounts, you need to add the Client SSO Redirect URI to the Microsoft Entra application.

1. On the left navigation bar of the Microsoft Entra application, go to **Authentication**.

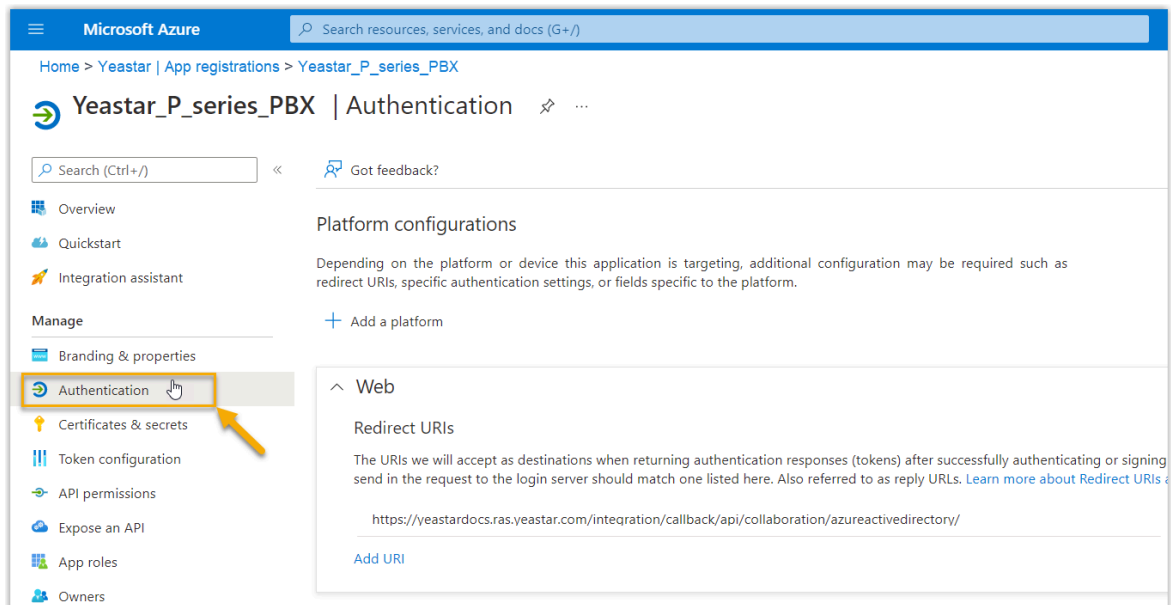

2. Add the SSO Redirect URI of Linkus UC Clients.

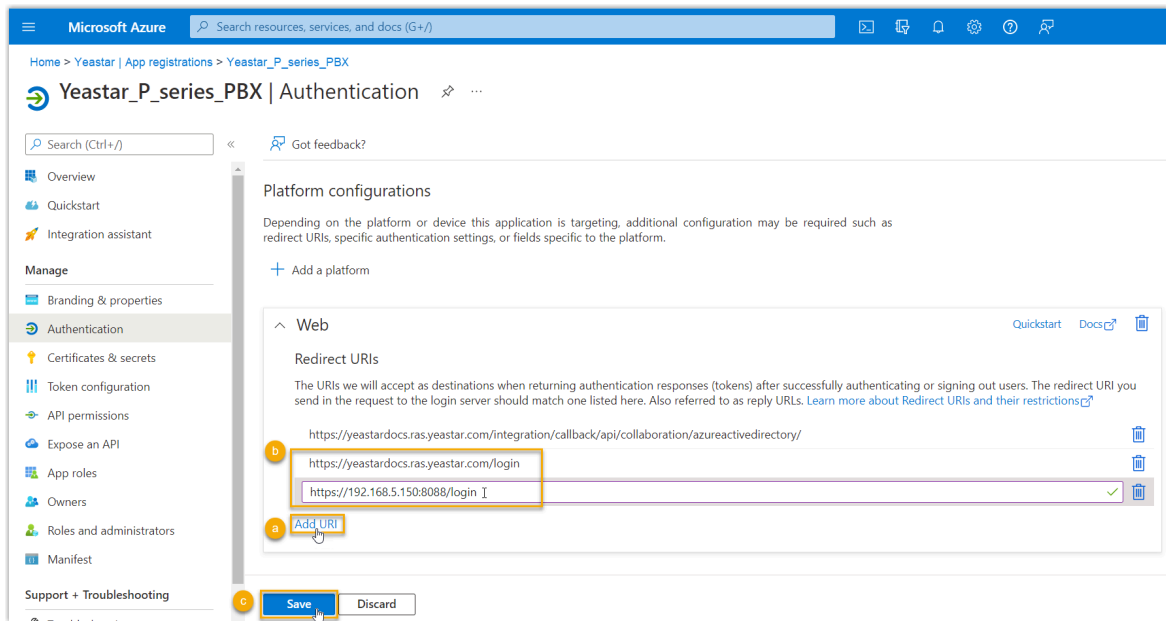


- a. On the **Authentication** page, click **Add URI** in the **Web** section.
- b. Paste the [Client SSO Redirect URI](#) obtained from the PBX.
- c. Click **Save**.


Step 4. Grant permissions to the Microsoft Entra application

Grant the required API application permission to the Microsoft Entra application, allowing the application to access specified data within Microsoft Entra ID.

1. On the left navigation bar of the Microsoft Entra application, go to **API permissions**, then click **Add a permission**.

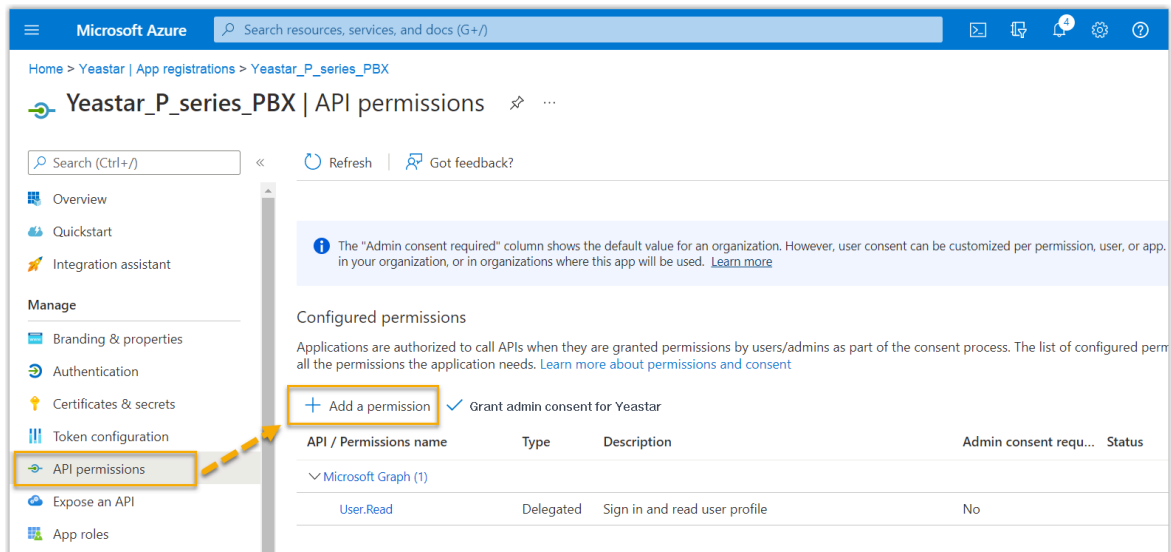

2. In the **Select an API** page, go to **Microsoft APIs > Microsoft Graph**.

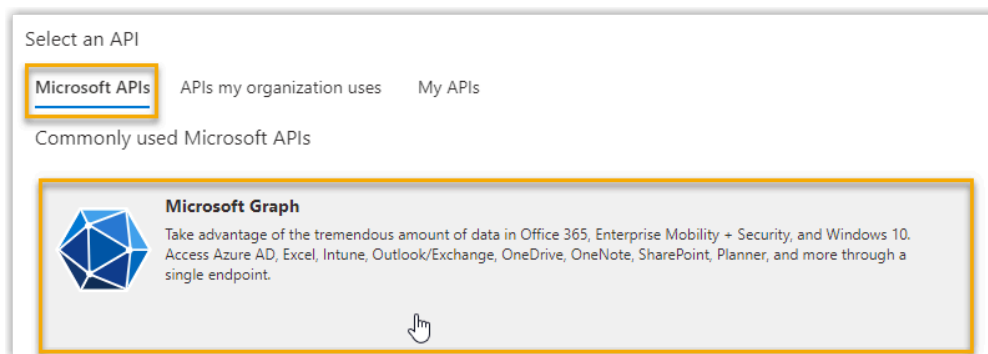

3. Add the required permission to allow the application to set the state of users' presence.

- Click **Application permissions**, search and select **Presence.ReadWrite.All** permission, then click **Add permissions**.

Request API permissions

< All APIs

 Microsoft Graph
<https://graph.microsoft.com/> [Docs](#)

What type of permissions does your application require?

Delegated permissions
Your application needs to access the API as the signed-in user.

Application permissions
Your application runs as a background service or daemon without a signed-in user.

Select permissions expand all

Permission	Admin consent required
▽ Presence (1) ☒ Presence.ReadWrite.All ⓘ Read and write presence information for all users	Yes

Add permissions Discard

b. Click **Grant admin consent for...** to grant the permission to the application.

Configured permissions

Applications are authorized to call APIs when they are granted permissions by users/admins as part of the consent process. The list of configured permissions should include all the permissions the application needs. [Learn more about permissions and consent](#)

+ Add a permission ☒ Grant admin consent for Xiamen Yeastar Digital Technology Co., Ltd.

API / Permissions name	Type	Description	Admin consent requ...	Status
Microsoft Graph (2)				
Presence.ReadWrite.All	Application	Read and write presence information for all users	Yes	⚠ Not granted for Xiamen... ⋮
User.Read	Delegated	Sign in and read user profile	No	⋮

c. In the pop-up dialog box, select **Yes**.

Grant admin consent confirmation.

Do you want to grant consent for the requested permissions for all accounts in Xiamen Yeastar Digital Technology Co., Ltd.? This will update any existing admin consent records this application already has to match what is listed below.


Yes No

The **Status** of the permissions changes to , indicating that the API permission has been granted to the application successfully.

Step 5. Generate a client secret for the Microsoft Entra application

Generate a client secret for the Microsoft Entra application to authenticate the application in the integration.

1. On the left navigation bar of the Microsoft Entra application, go to **Certificates & secrets > Client secrets**, then click **New client secret**.

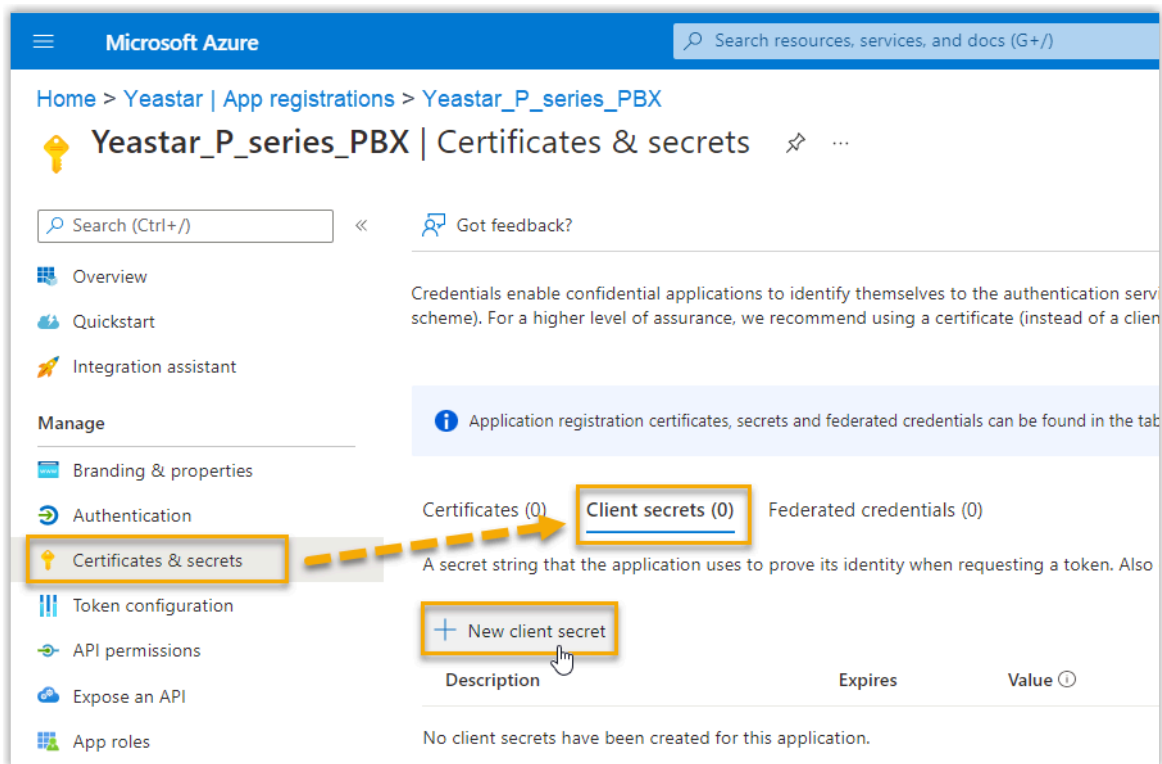

2. In the **Add a client secret** page, do as follows:
 - a. Add a description and set an expiration date for the client secret.

Add a client secret

Description

yeastar-pseries-pbx

Expires

24 months

- b. On the bottom of the page, click **Add**.

A client secret is created and displayed in the **Client secrets** list.


3. Note down the client secret's **Value** as you will need to fill it into the PBX later.



Important:



Record the client secret's value before leaving the page, as the key is only shown once. Otherwise, you will have to create a new secret.

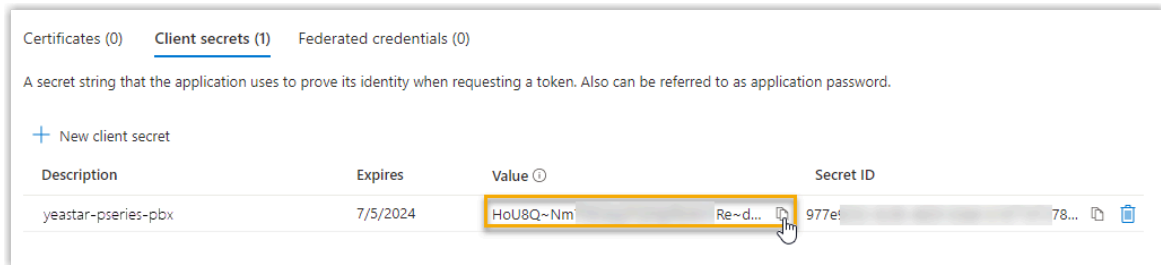


Step 6. Connect PBX and Microsoft Entra ID

Fill the application ID and client secret gathered from the Microsoft Entra application into PBX to implement the integration between Yeastar P-Series Software Edition and Microsoft Entra ID.


1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Click **Integrate** beside the **Microsoft 365** service.
3. In the **App Registration** section, enter the following information:
 - **Application (Client) ID:** Paste the [application ID](#).
 - **Tenant ID:** Paste the [tenant ID](#).
4. In the **Certificates & Secrets** section, paste the [client secret](#) in the **Client Secret** field.
5. Click **Save**.

You are redirect to the Microsoft Sign-in page.


6. Sign in with the Microsoft account that has **Global Administrator** privilege.

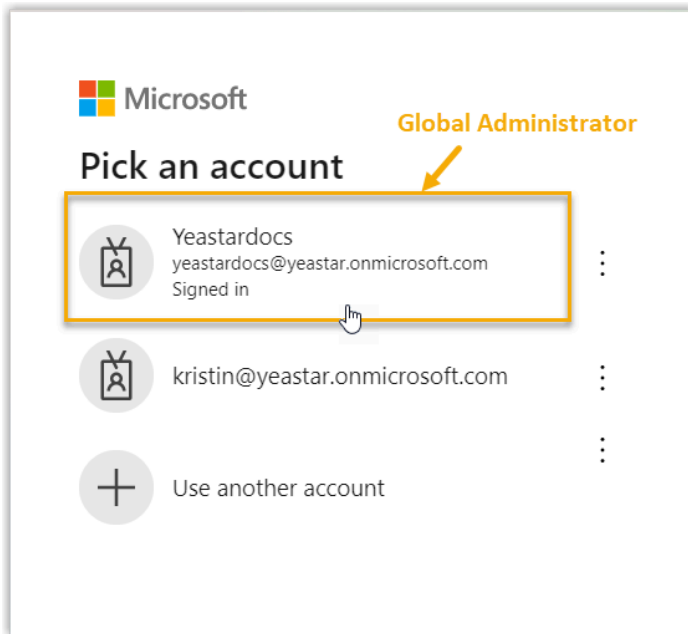


7. You might be asked to provide an additional security confirmation. Click **Next** to complete it or skip for now.

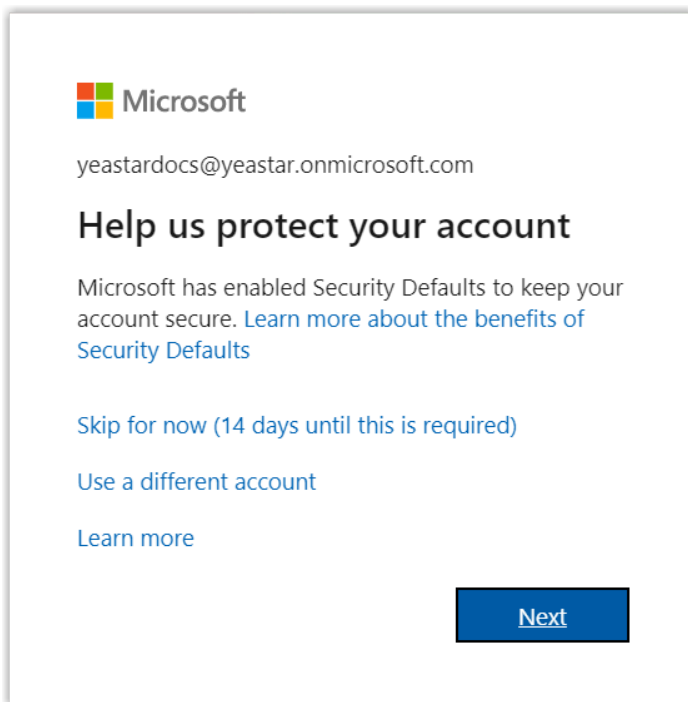

8. In the pop-up window, check the permissions and click **Accept** to confirm.

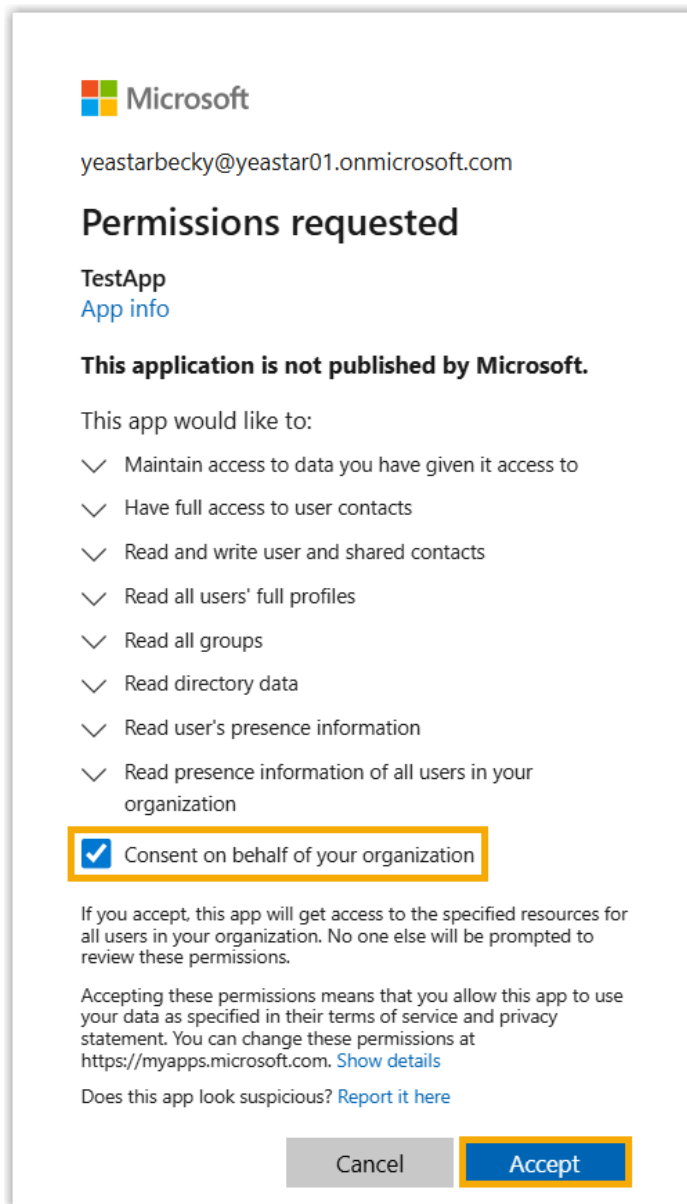


9. On the PBX configuration page, click **OK** to close the dialog box.

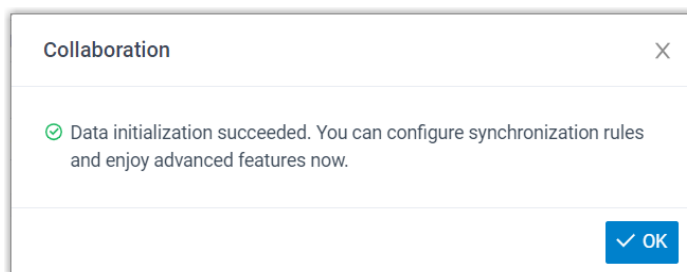

Result

The status of the integration displays **Connected**, indicating that the PBX is successfully connected to your organization's Microsoft Entra ID.

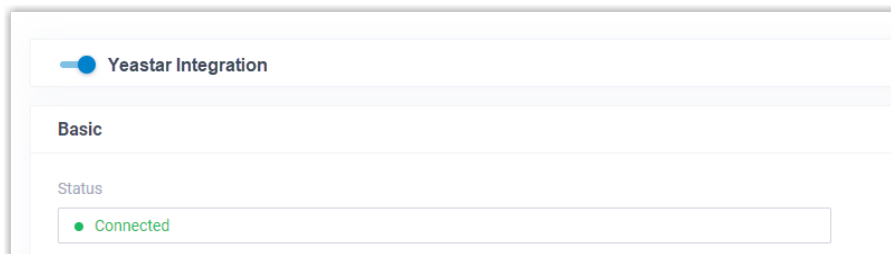

What to do next

Set up synchronization rules to synchronize the desired users and groups from Microsoft Entra ID to PBX. For more information, see the following topics:

- [Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition](#)
- [Synchronize Groups from Microsoft Entra ID to Yeastar P-Series Software Edition](#)

Related information

[Disable Microsoft Entra ID Integration](#)

[Disconnect Microsoft Entra ID Integration](#)

Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition

This topic describes how to customize synchronization rule based on users, so as to synchronize users from Microsoft Entra ID to Yeastar PBX system. PBX will create extensions for the specified users to be synced accordingly, and keep the extensions up-to-date with changes from the synced users.

Limitation

The number of users that can be synced from Microsoft Entra ID to PBX depends on the number of extensions that PBX system can create.

Prerequisites

You have [integrated Yeastar P-Series Software Edition with Microsoft Entra ID](#).

Procedure


You can either bulk synchronize Microsoft Entra ID users within a specified range and automatically assign PBX extensions, or synchronize specific users and assign PBX extensions for them individually.

Follow the corresponding instructions below to complete the synchronization configuration according to your needs.


- [Synchronize Microsoft Entra ID users within a specified range](#)
- [Synchronize specific Microsoft Entra ID users](#)

Synchronize Microsoft Entra ID users within a specified range

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **User Synchronization** section, turn on the switch.



3. In the **User Range for Extension Auto Creation** drop-down list, specify the users that you want to synchronize to PBX and create extensions for them.

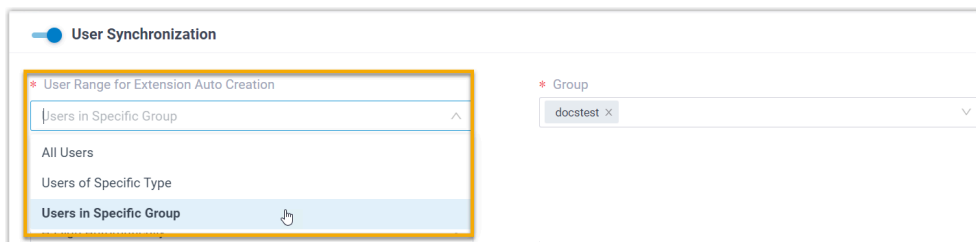

Option	Description
All Users	Synchronize all users from Microsoft Entra ID to PBX and create extensions for them.
Users of Specific Type	Synchronize the specified type(s) of users from Microsoft Entra ID to PBX and create extensions for them. You need to select the desired user type(s) in the User Type drop-down list. • Member: All member users in your organization's directory.

Option	Description
	• Guest: All guest users in your organization's directory.
Users in Specific Group	Synchronize the users within the specified group(s) from Microsoft Entra ID to PBX and create extensions for them. You need to select the desired group(s) in the Group drop-down list.

**Note:**

In future use, if you change the range of users to be synced, you can decide how to deal with the extensions that are no longer synced from the users in Microsoft Entra ID via the **Auto delete the Extensions no longer in sync** option.


- If selected, the extensions will be deleted during the next synchronization.
- If unselected, the extensions will be retained and fully managed by the PBX.

4. In the **User's Extension Number** drop-down list, configure the extension number assignment rule.

Option	Description
Assign Automatically	Assign extension numbers from a specific starting number. You need to specify the starting number in the Start Extension Number from field.
Read Specific Property Value	Assign extension numbers based on users' property value. This can be used in the scenario that the

Option	Description
	users already have phone extensions assigned in Microsoft Entra ID, and you want to keep their extension numbers instead of assigning new ones. You need to specify the property where the users' extension numbers are stored (e.g. businessPhones) in the Property Name field.  Tip: Refer to Microsoft User Properties for the property name.

5. In the **Delete the Extension when its associated user account is** drop-down list, select the account status(es) at which PBX will stop syncing from the users, and delete the associated extensions.

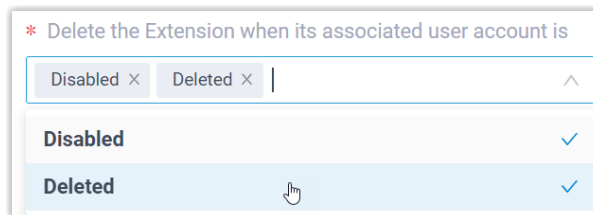

* Delete the Extension when its associated user account is

Disabled × Deleted ×

Disabled ✓

Deleted ✓

Option	Description
Disabled	If an user account is disabled in Microsoft Entra ID, PBX will stop syncing from the user and delete the associated extension.
Deleted	If a user account is deleted in Microsoft Entra ID, PBX will stop syncing from the user and delete the associated extension.

6. On the **Auto associate Extensions with the Users that share the same email address** option, decide whether to sync users from Microsoft Entra ID to PBX when the users have the same email addresses with existing extensions.
- If selected, the users with same mailboxes will be synced to PBX and associated with the existing extensions, the extensions' user information will then be overwritten by that of the users.
 - If unselected, the users with same mailboxes will not be synced to PBX as the PBX system does not allow duplicated email addresses.

7. If you want to send Linkus Welcome Email to the synced users, select the checkbox of **Send Welcome Email automatically after an extension is created**.
8. In the **Map** section, select and map the fields for the user information you want to synchronize.

**Note:**

Refer to [Microsoft User Properties](#) to fill in the Azure Active Directory fields.

Map		Azure Active Directory Field
☒ PBX Field		
☒ First Name		givenName
☒ Last Name		surname
☒ Email Address		mail
☒ Mobile Number		mobilePhone
☒ Job Title		jobTitle

9. Click **Save**.


**Note:**

- If it is the FIRST time you save the synchronization-related settings, PBX will perform the initial synchronization immediately.
- Otherwise, you can [manually perform a directory synchronization](#) or wait for the [automatic directory synchronization](#).


Synchronize specific Microsoft Entra ID users

Specify the group(s) where the PBX can search for Microsoft Entra ID users, then manually select the desired Microsoft Entra ID users to be synchronized to PBX, and individually associate PBX extensions for these users.


1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **User Synchronization** section, turn on the switch.



3. In the **User Range for Extension Auto Creation** drop-down list, select **Specific Users**.

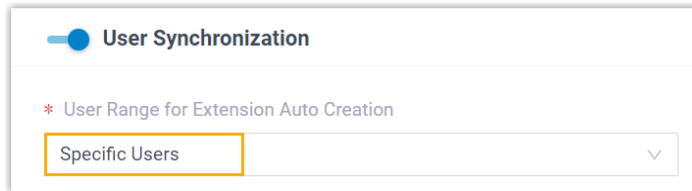


4. In the **Search Criteria** and **Group** drop-down lists, specify the search scope in which PBX can search the Microsoft Entra ID users.

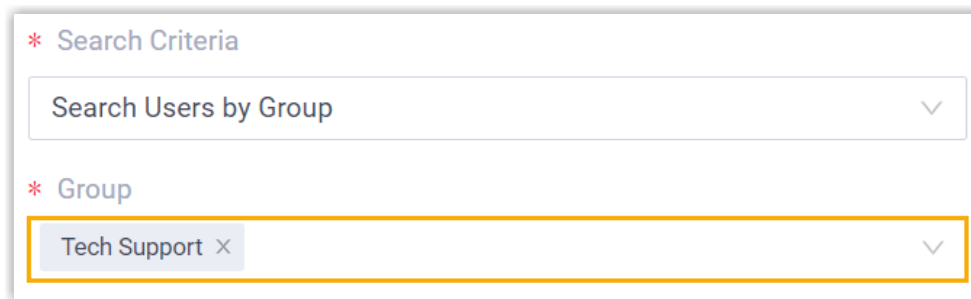

5. Click **Search Users**.

PBX searches Microsoft Entra ID users within the specified scope, and displays users in the **Search Result List**.

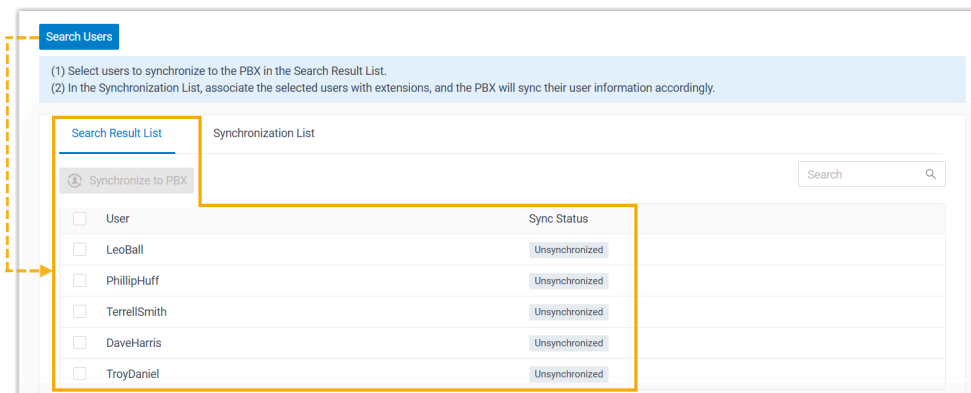


Tip:




You can quickly locate the desired Microsoft Entra ID users by entering their username on the **Search** field at the top-right corner.

6. Select the desired Microsoft Entra ID user(s) for synchronization, then click **Synchronize to PBX**.

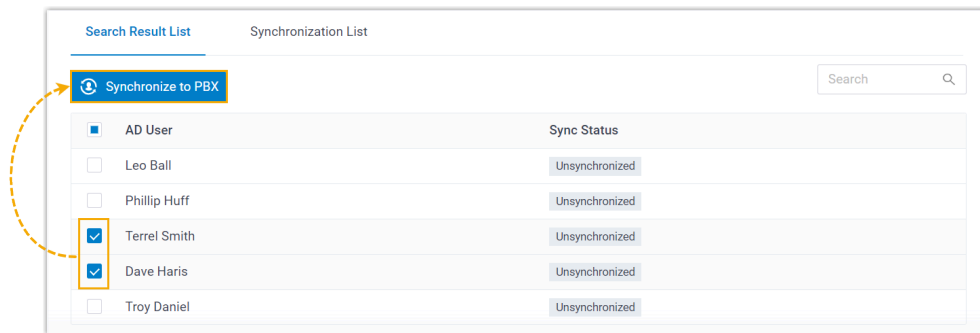

The selected Microsoft Entra ID users are added to the **Synchronization List**.

7. In the **Associate with Extension** drop-down list beside the Microsoft Entra ID user, select an extension to assign to the Microsoft Entra ID user.

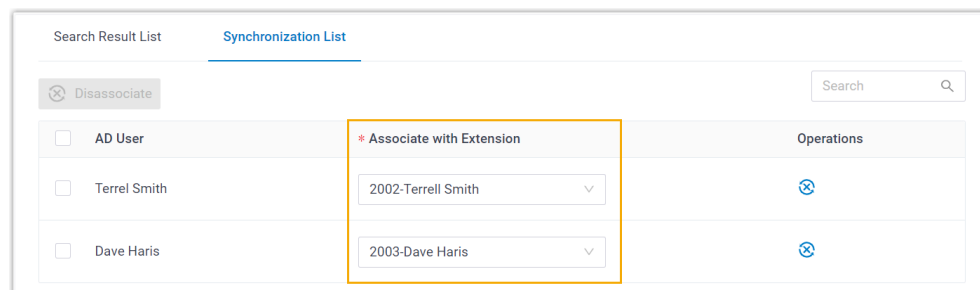

Tip:

To disassociate a synced Microsoft Entra ID user with the PBX extension, select the desired Microsoft Entra ID user and click **Disassociate** button on the top of the list. After you save the setting, the Microsoft Entra ID user will be successfully disassociated with the extension.

8. In the **Delete the Extension when its associated user account is** drop-down list, select the account status(es) at which PBX will stop syncing from the users, and delete the associated extensions.

* Delete the Extension when its associated user account is

Disabled ×
Deleted ×
^

Disabled	✓
Deleted	✓

Option	Description
Disabled	If an user account is disabled in Microsoft Entra ID, PBX will stop syncing from the user and delete the associated extension.
Deleted	If a user account is deleted in Microsoft Entra ID, PBX will stop syncing from the user and delete the associated extension.

- If you want to send Linkus Welcome Email to the synced users, select the checkbox of **Send Welcome Email automatically after an extension is created**.
- In the **Map** section, select and map the fields for the user information you want to synchronize.



Note:

Refer to [Microsoft User Properties](#) to fill in the Azure Active Directory fields.

Map

☒ PBX Field	Azure Active Directory Field
☒ First Name	givenName
☒ Last Name	surname
☒ Email Address	mail
☒ Mobile Number	mobilePhone
☒ Job Title	jobTitle

- Click **Save**.



Note:

- If it is the FIRST time you save the synchronization-related settings, PBX will perform the initial synchronization immediately.




- Otherwise, you can [manually perform a directory synchronization](#) or wait for the [automatic directory synchronization](#).

Result

You have created your custom synchronization rule for synchronizing users from Microsoft Entra ID to the PBX.

During a synchronization process, PBX system performs queries within the Microsoft Entra ID based on the rule, and synchronizes the desired users as well as the updated information to PBX. After the synchronization, the followings can be implemented:

- You can check the synchronization result in the **User Synchronization** section.

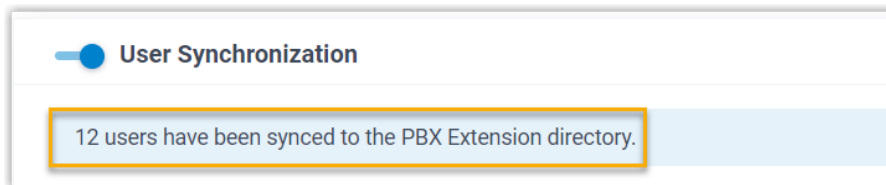

- The PBX extensions that are associated with users in Microsoft Entra ID come with a label , and can not be manually deleted on PBX.
- You can NOT manually update the following information of the PBX extensions that are associated with users in Microsoft Entra ID on PBX.



Note:

The information can only be modified within the Microsoft Entra ID and updated to the PBX during a synchronization.

- Last name
- First name
- Email Address
- Mobile Number
- Job Title

What to do next

If you want to allow the synced users to log in to Linkus UC Clients using their Microsoft accounts, you need to configure the Single Sign-on (SSO) feature.

For more information, see [Allow Users to Log in to Linkus UC Clients with SSO](#).

Related information

[Synchronize Groups from Microsoft Entra ID to Yeastar P-Series Software Edition](#)

[Synchronize Microsoft Outlook Contacts to Yeastar P-Series Software Edition](#)

[Enable Microsoft Teams User Presence Synchronization](#)

[Pause Microsoft Entra ID Synchronization](#)

Synchronize Groups from Microsoft Entra ID to Yeastar P-Series Software Edition

This topic describes how to customize synchronization rule based on groups, so as to synchronize desired groups from Microsoft Entra ID to Yeastar PBX's extension groups.

Limitation


The number of groups that can be synced from Microsoft Entra ID to PBX depends on the extension groups that PBX system can create (up to 63 extension groups).

Prerequisites


You have [integrated Yeastar P-Series Software Edition with Microsoft Entra ID](#).

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Scroll down to the **Group Synchronization** section, turn on the switch.



3. In the **Synchronize for** drop-down list, specify the groups that you want to synchronize to PBX.

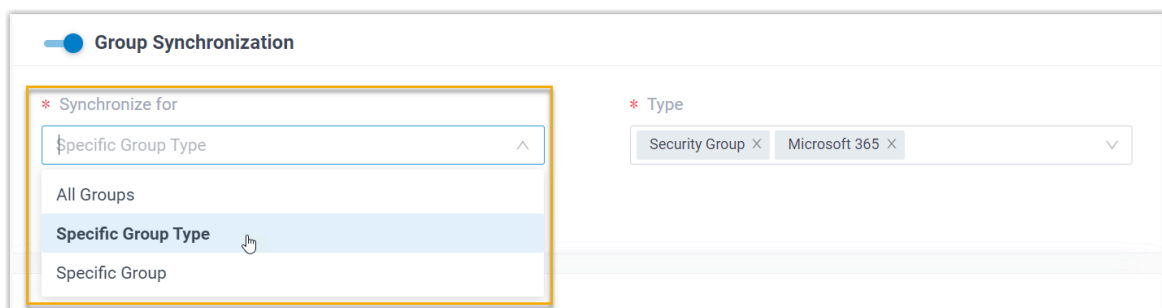


Option	Description
All Groups	Synchronize all groups from Microsoft Entra ID to PBX.
Specific Group Type	Synchronize the specified type(s) of groups from Microsoft Entra ID to PBX. You need to select the desired group type(s) in the Type drop-down list. • Security Group: All security groups in your organization's directory. • Microsoft 365: All Microsoft 365 groups in your organization's directory.
Specific Group	Synchronize specific groups from Microsoft Entra ID to PBX. You need to directly search and select the desired groups in the Group drop-down list.  Note: By default, the Group drop-down list displays 200 records of groups retrieved from Microsoft Entra ID. If you need the system to display more records, contact Yeastar.



Note:

In future use, if you change the range of groups to be synced, you can decide how to deal with the extension groups that are no longer synced from the groups in Microsoft Entra ID via the **Auto delete the Extension Groups no longer in sync** option.

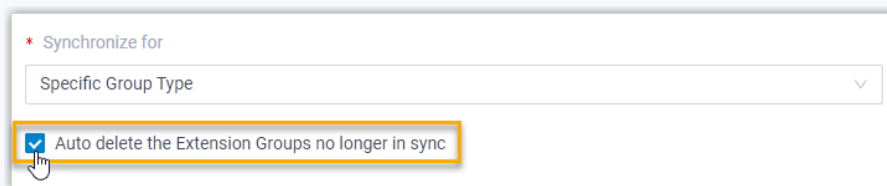

- If selected, the extension groups will be deleted during the next synchronization.
- If unselected, the extension groups will be retained and fully managed by the PBX.

4. Click **Save**.



Note:




- If it is the **FIRST** time you save the synchronization-related settings, PBX will perform the initial synchronization immediately.
- Otherwise, you can [manually perform a directory synchronization](#) or wait for the [automatic directory synchronization](#).

Result

You have created your custom synchronization rule for synchronizing groups from Microsoft Entra ID to the PBX.

During a synchronization process, PBX system performs queries within the Microsoft Entra ID based on the rule, and synchronizes the desired groups as well as the updated information to PBX. After the synchronization, the followings can be implemented:

- You can check the synchronization result in the **Group Synchronization** section.

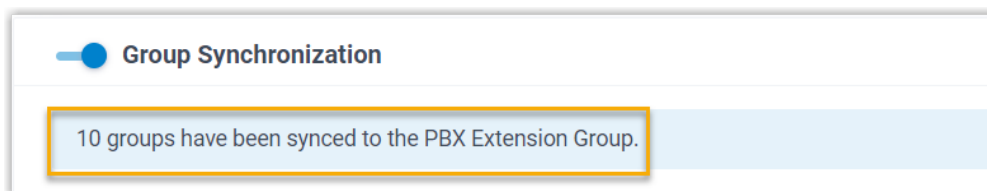

- The PBX extension groups that are associated with groups in Microsoft Entra ID come with a label , and can NOT be deleted.
- You can NOT manually update the name and group member of the PBX extension groups that are associated with Microsoft Entra ID on PBX.



Note:

The information can only be modified within the Microsoft Entra ID and updated to the PBX during a synchronization.

Related information

[Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition](#)
[Pause Microsoft Entra ID Synchronization](#)

Synchronize Microsoft Outlook Contacts to Yeastar P-Series Software Edition

Microsoft Entra ID (Azure Active Directory) integration provides one-way synchronization of Outlook contacts (personal Outlook contacts and contacts from Outlook shared mailboxes) to PBX and Linkus UC Clients. After synchronization, the users synced from Microsoft Entra ID to Yeastar PBX can access and make calls to their Outlook contacts through Linkus UC Clients.

Prerequisites


- You have [integrated Yeastar PBX with Microsoft Entra ID](#).
- You have [synchronized users from Microsoft Entra ID to Yeastar PBX](#).

Synchronize personal Outlook contacts to Linkus Contacts directory

To synchronize the users' personal Outlook contacts, you need to select the user range for syncing personal contacts on PBX, and the selected users need to share their personal contacts folder with the authorization account ([the account that is used to authorize the Microsoft Entra ID integration with the PBX](#)), so that PBX can access the contacts.

Step 1. Select user range for syncing personal contacts on PBX

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Scroll down to the **Microsoft Outlook Contacts Synchronization** section, and turn on the switch.





3. Select the checkbox of **Contacts Synchronization**.
4. In the **User Range for Contacts Synchronization** drop-down list, select the range.



Important:

Ensure that the user range you select here is covered by [the user range you selected when syncing users from Microsoft Entra ID to PBX](#), as this feature is only available for synced users.

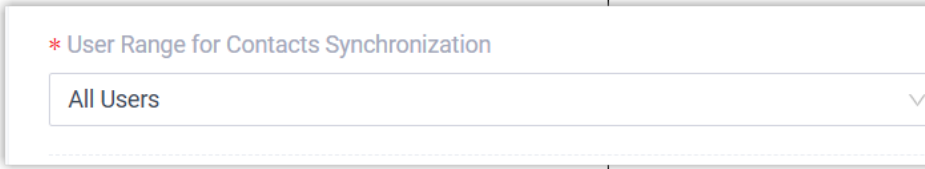Option	Description
All Users	Synchronize all the users' personal contacts to their Linkus Contacts directory. 
Users in Specific Group	Synchronize personal contacts of users within the specified group(s) to their Linkus Contacts directory. You need to select the desired groups in the Group drop-down list. 
Specific Users	Synchronize personal contacts of the selected users to their Linkus Contacts directory. You need to select the desired users as shown below:  Note: Click Select All Synced Users to quickly select all Microsoft Entra ID users that have already been synced to the PBX.


Option	Description												
	User Range for Contacts Synchronization a Specific Users Search Criteria b Search Users by Group Group c TechSupport x Search Users Select the users from the search results list to synchronize their contacts to the PBX. Search Result List Synchronization List e Synchronize to PBX Select All Synced Users <table> <thead> <tr> <th>User</th> <th>User Principal Name</th> </tr> </thead> <tbody> <tr> <td>☒ LeoBall</td> <td>LeoBall@yeastar01.onmicrosoft.com</td> </tr> <tr> <td>☐ PhillipHuff</td> <td>PhillipHuff@yeastar01.onmicrosoft.com</td> </tr> <tr> <td>☐ TerrellSmith</td> <td>TerrellSmith@yeastar01.onmicrosoft.com</td> </tr> <tr> <td>☐ DaveHarris</td> <td>DaveHarris@yeastar01.onmicrosoft.com</td> </tr> <tr> <td>☐ TroyDaniel</td> <td>TroyDaniel@yeastar01.onmicrosoft.com</td> </tr> </tbody> </table> Total: 5 < 1 > 20 / page	User	User Principal Name	☒ LeoBall	LeoBall@yeastar01.onmicrosoft.com	☐ PhillipHuff	PhillipHuff@yeastar01.onmicrosoft.com	☐ TerrellSmith	TerrellSmith@yeastar01.onmicrosoft.com	☐ DaveHarris	DaveHarris@yeastar01.onmicrosoft.com	☐ TroyDaniel	TroyDaniel@yeastar01.onmicrosoft.com
User	User Principal Name												
☒ LeoBall	LeoBall@yeastar01.onmicrosoft.com												
☐ PhillipHuff	PhillipHuff@yeastar01.onmicrosoft.com												
☐ TerrellSmith	TerrellSmith@yeastar01.onmicrosoft.com												
☐ DaveHarris	DaveHarris@yeastar01.onmicrosoft.com												
☐ TroyDaniel	TroyDaniel@yeastar01.onmicrosoft.com												

5. Click **Save**.


Step 2. Share personal Outlook contacts folder on Outlook Desktop Client

We provide an example on how an individual user in Microsoft Entra ID can share his or her personal Outlook contacts folder on Outlook Desktop Client.

1. Log in to Outlook Desktop Client, go to  (**People**).
2. In **My Contacts** section, right click the personal contacts folder, then select **Properties....**
3. In the pop-up window, search for and add the authorization account (the account that is used to authorize the Microsoft Entra ID integration with PBX).

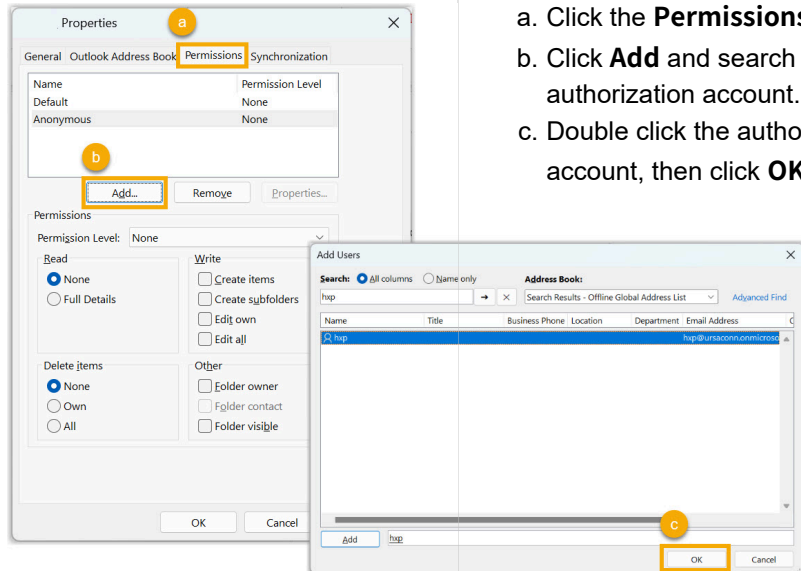Screenshot	Instruction
	a. Click the Permissions tab. b. Click Add and search for the authorization account. c. Double click the authorization account, then click OK.

4. Grant the authorization account access to contacts in the folder.

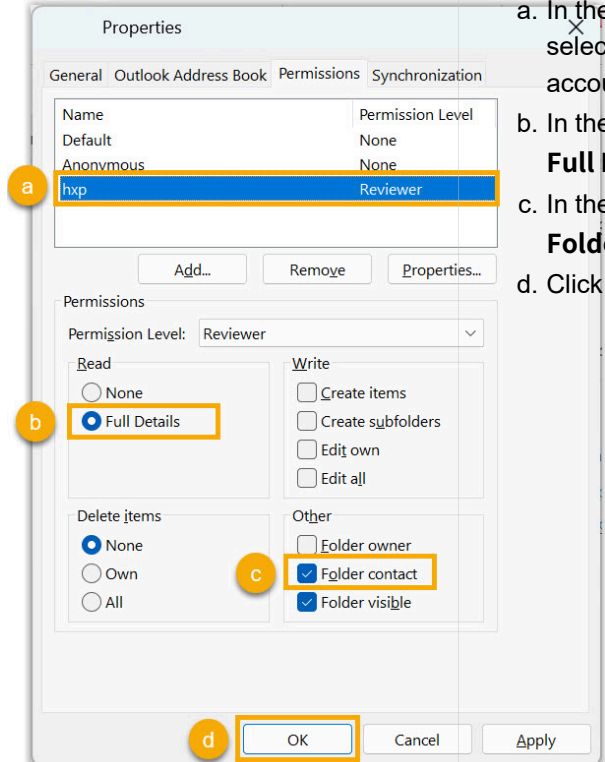
Screenshot	Instruction
	a. In the upper user section, select the authorization account. b. In the Read section, select Full Details. c. In the Other section, select Folder contact. d. Click OK.

**Note:**

The system will perform the synchronization at the preset time for [automatic directory synchronization](#), you can also [manually perform a directory synchronization](#) to sync Outlook contacts.

Result

After the synchronization, the specified users' personal Outlook contacts are synced to their Linkus Contacts directory with a label . And the synced contacts can NOT be edited or deleted on Linkus UC Clients.

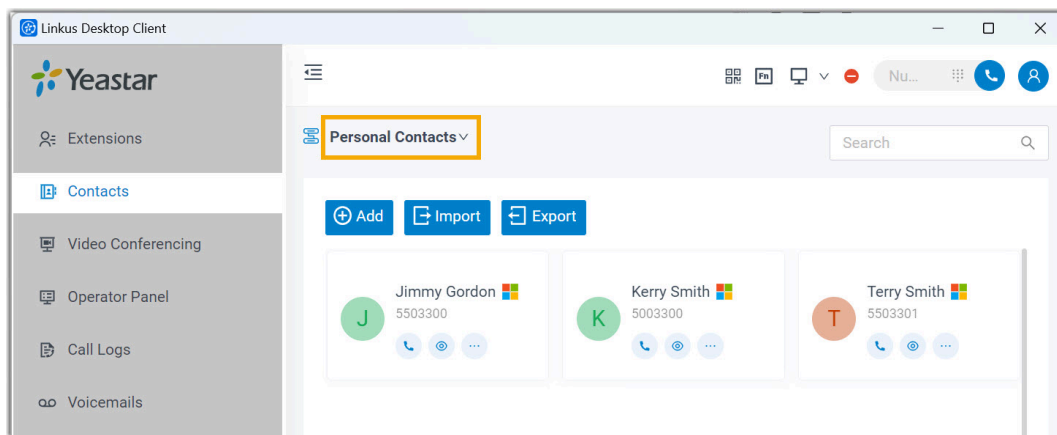**Troubleshooting:****Unable to synchronize specific Outlook contacts?**

Incomplete information of Outlook contacts can lead to synchronization failure. Make sure the following fields are filled in for Outlook contacts, then perform the directory synchronization again:


- **First name or Last name:** At least one field is required.
- **Mobile phone number, Home phone, or Business phone:** At least one field is required.

Synchronize contacts from Outlook shared mailboxes to PBX phonebooks

To synchronize contacts from shared mailboxes, you need to set up shared contacts synchronization on PBX, and add the authorization account ([the account that is used to authorize the Microsoft Entra ID integration with the PBX](#)) as a member of the desired shared mailboxes on Microsoft 365 admin center, so that PBX can access the contacts within the shared mailboxes.

Step 1. Set up shared contacts synchronization on PBX

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Scroll down to **Microsoft Outlook Contacts Synchronization** section, turn on the switch.



3. Select the checkbox of **Shared Mailbox Contacts Synchronization**.
4. In the **Shared Mailbox Contacts Synchronization** drop-down list, select the range.

Option	Description
Contacts in All Shared Mailboxes	Synchronize contacts from all the Outlook shared mailboxes to PBX phonebooks.
Contacts in Specific Shared Mailboxes	Synchronize contacts from specific Outlook shared mailbox(es) to PBX phonebooks. You can select the desired shared mailbox(es) in the Shared Mailboxes drop-down list.

5. Define the phonebook name for the shared contacts to be synced.

 A screenshot of the "Shared Mailboxes" configuration interface. It has a title "Shared Mailboxes" and a subtitle "* Synchronize to Phonebook of Company Contacts". There are two input fields. The first field contains the email address "Yeastar Docs-yeastardocs@ursaconn.onmicrosoft.com" and is annotated with an orange arrow pointing to it from the text "The Outlook shared mailbox where the shared contacts are located." below. The second field contains the text "Yeastar Docs_Synchronization" and is annotated with an orange arrow pointing to it from the text "The PBX phonebook where the shared contacts will be stored after synchronization." below.

6. Click **Save**.

Step 2. Add the authorization account to the shared mailboxes on Microsoft 365 admin center

1. Log in to [Microsoft 365 admin center](#).
2. On the left navigation bar, click **Teams & groups** and select **Shared mailboxes**.
3. Click the desired shared mailbox and configure the following settings.
 - a. In the **Members** section, click **Edit**.
 - b. Click **Add members** and search for the authorization account (the account that is used to authorize the Microsoft Entra ID integration with PBX).
 - c. Select the authorization account and click **Add**.
4. Repeat **step 3** for all the shared mailboxes that needs to be synced.




Note:

The system will perform the synchronization at the preset time for [automatic directory synchronization](#), you can also [manually perform a directory synchronization](#) to sync Outlook contacts.

Result

After the synchronization, the followings can be implemented:

- The shared mailboxes and their contacts are synchronized to PBX phonebook, which comes with a label  and can NOT be edited or deleted on PBX.

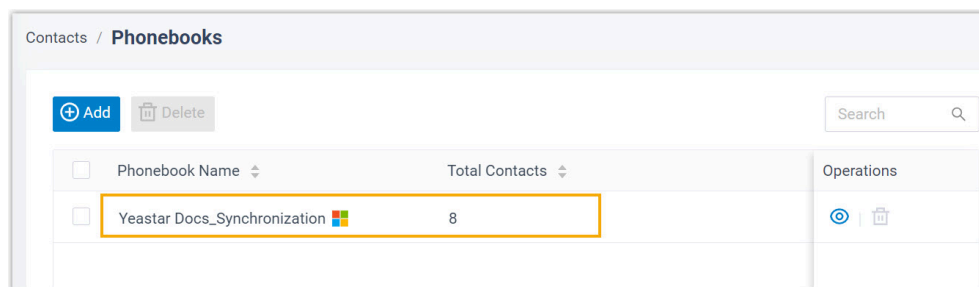

Troubleshooting:

Unable to synchronize specific Outlook contacts?

Incomplete information of Outlook contacts can lead to synchronization failure. Make sure the following fields are filled in



for Outlook contacts, then perform the directory synchronization again:

- **First name** or **Last name**: At least one field is required.
 - **Mobile phone number, Home phone, or Business phone**: At least one field is required.
- By default, the synced phonebook is NOT visible to users. To allow users to view the phonebook and its contacts, go to **Extension and Trunk > Client Permission > Contact Visibility**.



Note:

Users with permission can log in to Linkus clients, go to **Contacts** and select the phonebook to view its contacts.

Enable Microsoft Teams User Presence Synchronization

Microsoft Entra ID (Azure Active Directory) integration provides synchronization of Teams user presence with PBX extension presence. To achieve Teams user presence synchronization, you need to enable the feature and set up presence synchronization for the synced users' extensions.

Prerequisites

- You have [integrated Yeastar PBX with Microsoft Entra ID](#).
- You have [synchronized users from Microsoft Entra ID to Yeastar PBX](#).

Step 1. Enable Teams user presence synchronization

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. Scroll down to the bottom, then turn on the switch of **Microsoft Teams User Presence Synchronization**.




Microsoft Teams User Presence Synchronization


3. Click **Save**.

Step 2. Set up presence synchronization for Teams users' extensions

1. On PBX web portal, go to **Extension and Trunk > Extension**.
2. Select the checkboxes of the synced users' extensions, then click **Edit**.

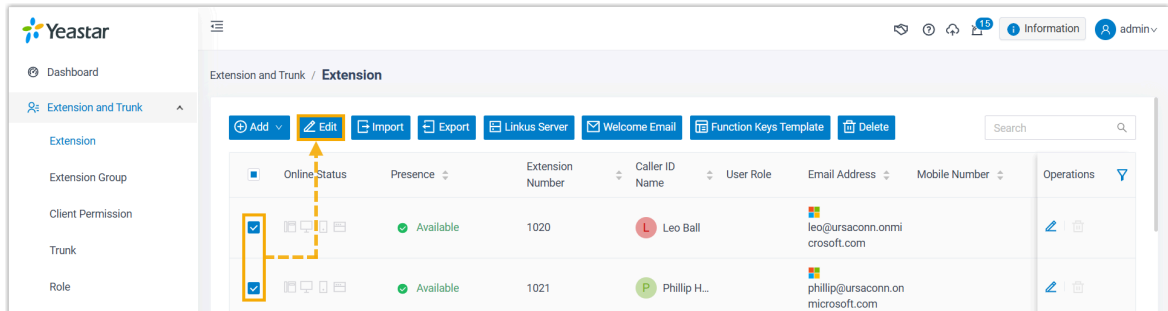

3. Click **Features** tab, then scroll down to **Microsoft Teams User Presence Synchronization** section.

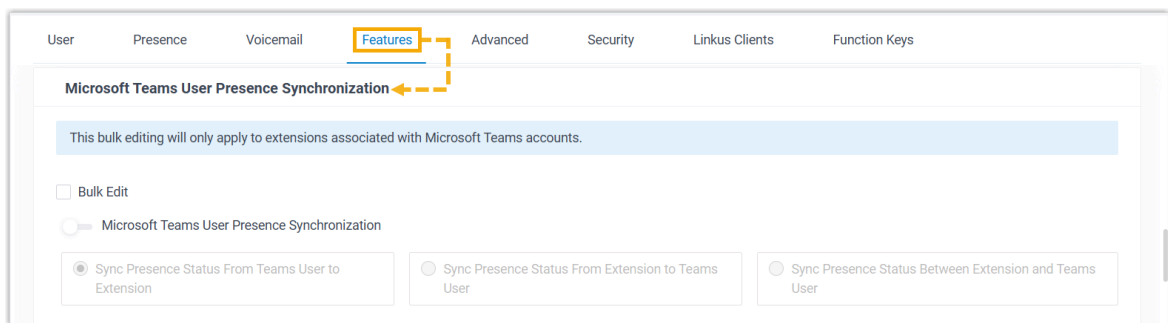

4. Enable and set up presence synchronization.

Microsoft Teams User Presence Synchronization

This bulk editing will only apply to extensions associated with Microsoft Teams accounts.

a ☒ Bulk Edit

b ☐ Sync Presence Status From Teams User to Extension ☐ Sync Presence Status From Extension to Teams User ☒ Sync Presence Status Between Extension and Teams User

Please configure one-to-one presence status synchronization to prevent configuration conflicts. Failure to do so may result in cyclical modification errors.

c

Extension Presence Auto Switch		Teams User Presence Auto Switch	
Teams User Presence	Extension Presence	Extension Presence	Teams User Presence
Available	Available	Available	Available
Busy	Do Nothing	Away	Appear away
Do not disturb	Do Not Disturb	Business Trip	Appear away
Be right back	Away	Do Not Disturb	Do not disturb
Appear away	Away	Lunch Break	Appear away
Appear offline	Away	Off Work	Appear offline
In a Call	Do Nothing	Ringling	In a Call
In a Meeting	Do Nothing	Busy	In a Call
Presenting	Do Nothing		

- a. Select the checkbox of **Bulk Edit**, then turn on the switch of **Microsoft Teams User Presence Synchronization**.
 - b. Select an option to determine how presence status will be synchronized between the users' Teams account and PBX extensions.
 - c. Map Teams user presence and extension presence.
5. Click **Save**.

Result

Changes made on the users' Teams presence and extension presence will be synchronized based on the rule.



Note:

- If you enable bidirectional synchronization, when extension status is **Ringling** or **Busy**, the system will update the Teams user's presence accordingly, but it will NOT adjust the extension status based on the Teams' users presence.
- The users can also update the mapping in their **Linkus Web Client** or **Linkus Desktop Client** (Path: **Preferences > Features > Microsoft Teams User Presence Synchronization**).

Allow Users to Log in to Linkus UC Clients with SSO


This topic describes how to configure the Single Sign-on (SSO) feature, so that users synced from Microsoft Entra ID can securely log in to Linkus UC Clients by their Microsoft accounts.

Prerequisites

- You have [integrated Yeastar P-Series Software Edition with Microsoft Entra ID](#).
- You have [synchronized users from Microsoft Entra ID to Yeastar PBX](#).

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **Single Sign-on (SSO)** section, turn on the switch.




3. In the **Client SSO Redirect URI** drop-down list, select the desired Linkus UC Clients login address.



Note:

To implement SSO on Linkus UC Clients, make sure that you have [added the selected Linkus UC Clients SSO Redirect URI to the Microsoft Entra application](#).



4. **Optional:** In the **Login Method** drop-down list, specify how AAD users can log in to Linkus UC Clients.

*** Login Method**

Enforce SSO login only

Allow users to log in via SSO or using the PBX credential

Enforce SSO login only

- **Allow users to log in via SSO or using the PBX credential:** AAD users can log in to Linkus UC Clients via SSO or using the associated extension's account credentials.
- **Enforce SSO login only:** AAD users can log in to Linkus UC Clients only via SSO.

5. Click **Save**.

Result


The synced users can directly log in to Linkus UC Clients by their Microsoft accounts.



Note:

To use the SSO feature on Linkus Mobile / Desktop Client, the App version should be updated.

- **Linkus Android Client:** Version 5.21.7 or later
- **Linkus iOS Client:** Version 5.21.3 or later
- **Linkus Windows Desktop:** Version 1.18.5 or later
- **Linkus Mac Desktop:** Version 1.18.5 or later

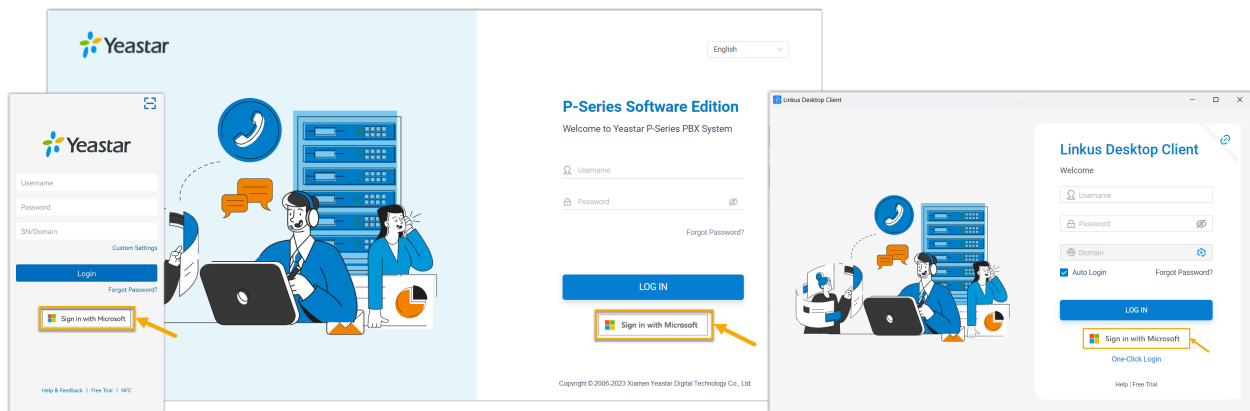

Related information

[Synchronize Users from Microsoft Entra ID to Yeastar P-Series Software Edition](#)

Manage Microsoft Entra ID Integration

Schedule Automatic Directory Synchronization


By default, PBX system automatically performs a directory synchronization at 00:30 every-day. You can also customize the automatic synchronization schedule to synchronize data from Microsoft Entra ID to Yeastar P-Series Software Edition at a specified time.

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **Basic** section, select the data synchronization frequency and set a specific time (non-office hours or weekends is recommended).

- **Daily**: The system synchronizes data daily at a preset local time.


For example, set up to synchronize data at 23:59 everyday.



A screenshot of a web form titled '* Data Synchronization Frequency'. It contains two input fields. The first is a dropdown menu with 'Daily' selected. The second is a text input field containing '23:59' with a clock icon to its right. There are red asterisks above each field indicating they are required.

- **Weekly**: The system synchronizes data on the selected days at a preset local time.

For example, set up to synchronize data at 23:59 on every Saturday.



A screenshot of a web form titled '* Data Synchronization Frequency'. It contains three input fields. The first is a dropdown menu with 'Weekly' selected. The second is a dropdown menu with 'Saturday' selected. The third is a text input field containing '23:59' with a clock icon to its right. There are red asterisks above each field indicating they are required.

3. Click **Save**.

Result

The PBX system performs periodic synchronizations automatically based on the schedule.



Note:

In addition to the scheduled automatic synchronization, the integration also implements another automatic synchronization, which will be triggered when either of the following conditions is met:



- If there are data changes (synced users have been modified or removed, name or group member of synced groups have been changed) occur in Microsoft Entra ID, PBX will perform an automatic directory sync in 10 minutes.
- If there are data changes (synced users have been modified or removed, member of synced groups have been changed) occur in Microsoft Entra ID, and the number of change events reaches 10, PBX will immediately perform an automatic directory sync.

Related information

[Manually Perform a Directory Synchronization](#)

Manually Perform a Directory Synchronization

In case you want to immediately apply a new synchronization rule, or update the data changes from the Microsoft Entra ID to PBX, you can manually start a synchronization.

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **Basic** section, click **Update Now**.

Result

The PBX system performs directory synchronization once.

Related information

[Schedule Automatic Directory Synchronization](#)

Update Client Secret for Microsoft Entra ID Integration


The client secret of the Microsoft Entra application has an expiration date, which is set when you create one. You will need to update the client secret for the integration prior to the expiration date to avoid the directory synchronization interruption.

Prerequisites

You have [generated a new client secret for the Microsoft Entra application](#).


Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. At the top-right of the **Basic** section, click **Update Client Secret**.

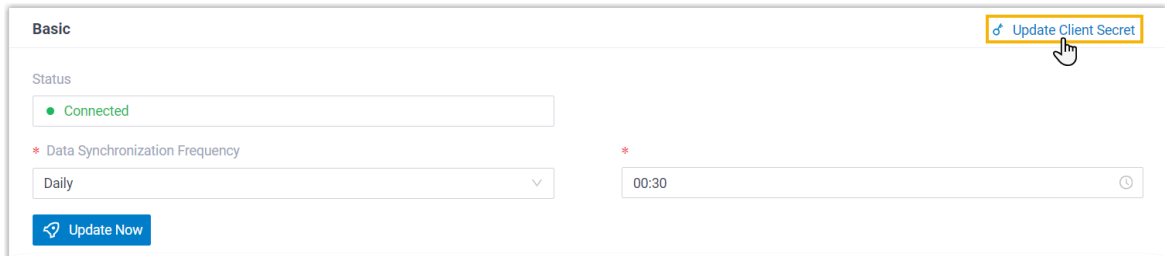

The screenshot shows the 'Basic' configuration page. At the top right, there is a link labeled 'Update Client Secret' with a key icon, which is highlighted by a yellow box and a mouse cursor. Below this, the 'Status' is 'Connected'. The 'Data Synchronization Frequency' is set to 'Daily'. A timer is set to '00:30'. An 'Update Now' button is located at the bottom left of the section.

3. In the pop-up window, do as follows:

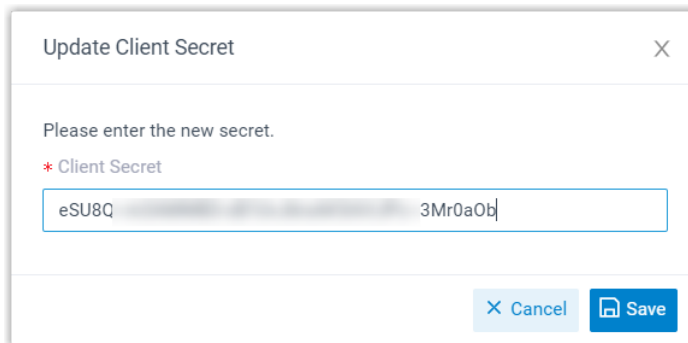

The screenshot shows a pop-up window titled 'Update Client Secret'. It contains the text 'Please enter the new secret.' and a label '* Client Secret'. Below the label is a text input field containing the text 'eSU8Q' followed by a masked area (represented by dots) and '3Mr0aOb'. At the bottom right, there are two buttons: 'Cancel' and 'Save'.

- a. In the **Client Secret** field, paste the new client secret.
- b. Click **Save**.


Pause Microsoft Entra ID Synchronization

If you want to prevent the synced data from being overwritten by the updates from Microsoft Entra ID, you can temporarily put the sync on hold. This topic describes how to pause the synchronization of users and groups from Microsoft Entra ID.


Pause synchronization of users

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **User Synchronization** section, turn off the switch.



3. Click **Save**.
4. In the pop-up window, do as follows:

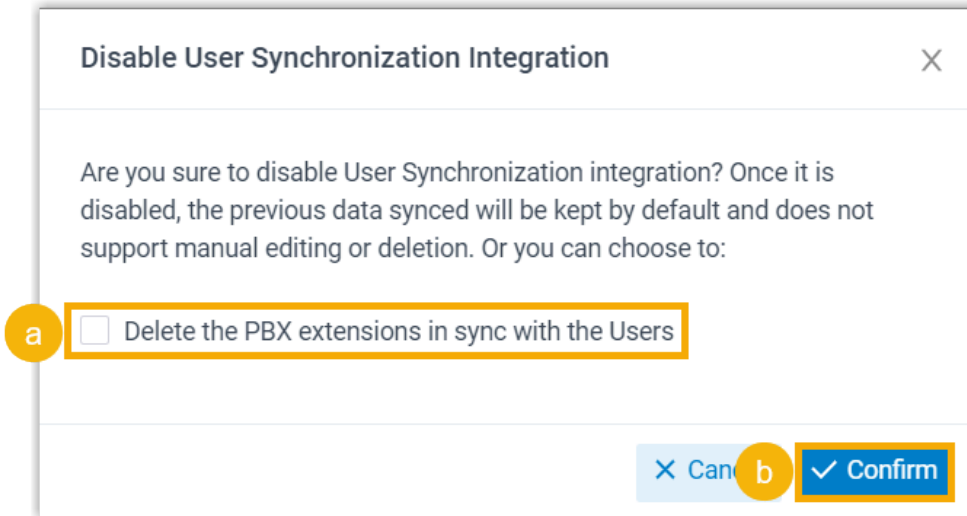

- a. If you want to delete the PBX extensions associated with the synced users, select the checkbox of **Delete the PBX extensions in sync with the Users**.
- b. Click **Confirm** to proceed.


Result

- The user synchronization is paused.
- The settings of **User Synchronization** remain and can not be edited.
- If you choose to retain the associated PBX extensions, you can NOT update the user information of the extensions, or delete the extensions.

Pause synchronization of groups


Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. In the **Group Synchronization** section, turn off the switch.



3. Click **Save**.

4. In the pop-up window, do as follows:

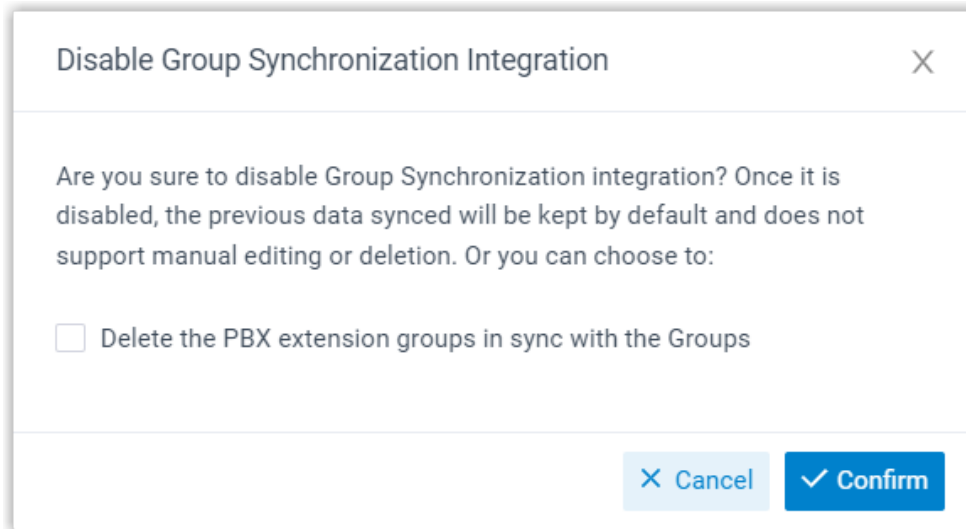

- a. If you want to delete the PBX extension groups associated with the synced groups, select the checkbox of **Delete the PBX extension groups in sync with the Groups**.
- b. Click **Confirm** to proceed.

Result

- The group synchronization is paused.
- The settings of **Group Synchronization** remain and can not be edited.
- If you choose to retain the associated extension groups, you can NOT update the name and group member of the extension groups, or delete the extension groups.

Related information


[Disable Microsoft Entra ID Integration](#)

Disable Microsoft Entra ID Integration


If there is a fix ongoing, and you might need to turn off the integration for troubleshooting, you can suspend the Microsoft Entra ID (Azure Active Directory) integration instead of disconnecting it. This topic describes how to disable the Microsoft Entra ID integration temporarily without losing the existing configurations.

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. On the top of the integration page, turn off the switch.

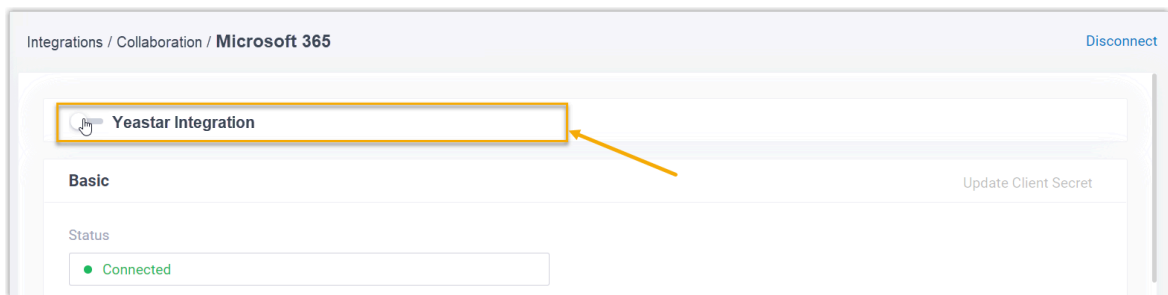

3. Click **Save**.
4. In the pop-up window, do as follows:

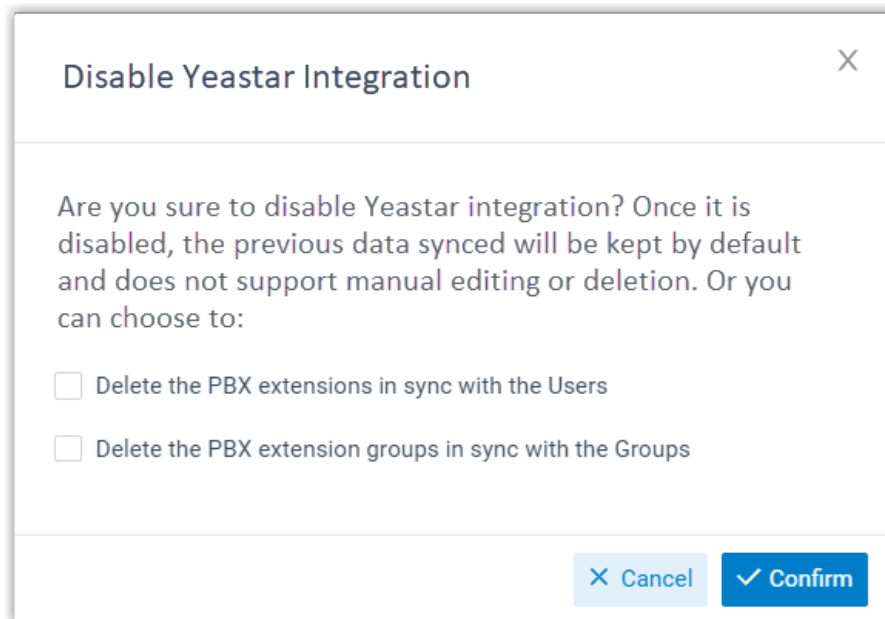


- a. Decide whether to clean up the PBX data that are associated with the synced users and groups.

Option	Description
Delete the PBX extensions in sync with the Users	• If selected, the extensions will be deleted. • If unselected, the extensions will be retained, and you can NOT update the user information of the extensions, or delete the extensions.
Delete the PBX extension groups in sync with the Groups	• If selected, the extension groups will be deleted. • If unselected, the extension groups will be retained, and you can NOT update the name and group member of the extension groups, or delete the extension groups.

b. Click **Confirm** to proceed.

Result

- The **Status** displays "Disable", indicating that the entire integration is suspended.

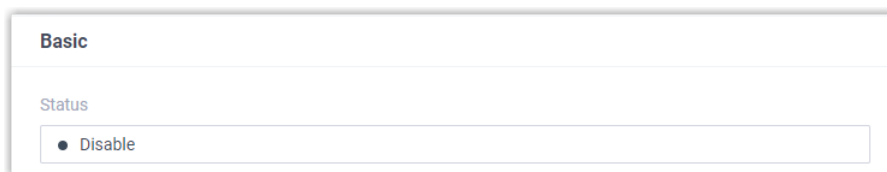

- The integration configurations remain and can not be edited.
- The synced users can NOT log in to Linkus UC Clients by their Microsoft accounts now.

Related information


[Disconnect Microsoft Entra ID Integration](#)

Disconnect Microsoft Entra ID Integration


If you want to integrate with another directory, you need to remove the current integration first. This topic describes how to disconnect the integration between Yeastar P-Series Software Edition and Microsoft Entra ID (Azure Active Directory).

Procedure

1. Log in to PBX web portal, go to **Integrations > Collaboration**.
2. At the top-right of the integration page, click **Disconnect**.

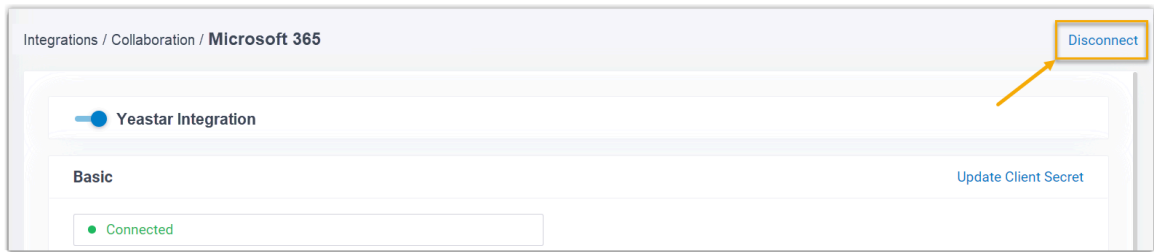

3. In the pop-up window, do as follows:

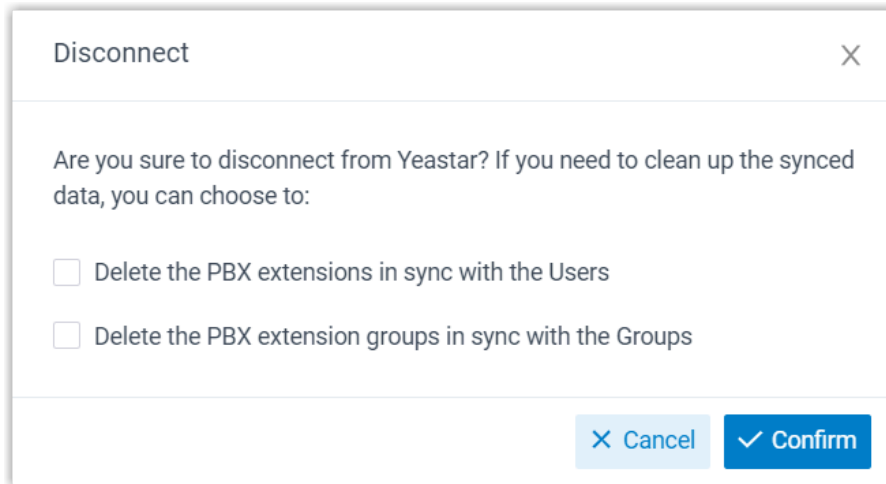

a. Decide whether to clean up the PBX data that are associated with the synced users and groups.

Option	Description
Delete the PBX extensions in sync with the Users	• If selected, the extensions will be deleted. • If unselected, the extensions will be retained and fully managed by the PBX.
Delete the PBX extension groups in sync with the Groups	• If selected, the extension groups will be deleted. • If unselected, the extension groups will be retained and fully managed by the PBX.

b. Click **Confirm**.

Result

The Microsoft Entra ID integration is disconnected.