

# Linkus Desktop Client

## User Guide

Version: 1.0

Date: 2024-04-22



# Contents

- Linkus Desktop Client Overview..... 1**
- Getting Started..... 4**
  - Log in to Linkus.....4
  - Linkus Login Overview.....4
  - Log in to Linkus with Extension Account Using Login Link..... 5
  - Log in to Linkus with Extension Account by One Click..... 7
  - Log in to Linkus with Extension Account Using Manually-Entered Credentials..... 8
  - Log in to Linkus with Microsoft Account.....10
  - Log in to Linkus with Active Directory Domain Account.....11
  - Reset Linkus Password..... 14
  - Change the Display Language.....16
  - Set Linkus Desktop Client to Run at Startup on a Computer..... 17
  - Log out of Linkus..... 19
- Two-Factor Authentication (2FA).....20**
  - Two-factor Authentication (2FA) Overview.....20
  - Configure Two-Factor Authentication Using Authenticator Application.....21
  - Configure Two-Factor Authentication Using Email.....23
  - Manage Two-Factor Authentication.....25
- Extensions.....28**
  - View Colleague Extensions..... 28
  - View Registered Extensions Only.....31
- Contacts..... 32**
  - Contacts Overview..... 32
  - Personal Contacts..... 33
    - Add a Personal Contact..... 33
    - Manage Personal Contacts.....38
    - Import and Export Personal Contacts.....39
  - Company Contacts.....41
    - Add a Company Contact.....41
    - Manage Company Contacts..... 46

Mark or Remove Favorite Contacts.....	47
<b>Chat.....</b>	<b>50</b>
Internal Chat.....	50
Linkus Desktop Client Internal Chat Overview.....	50
Start a Chat Session with Colleagues.....	51
External Chat.....	53
Linkus Desktop Client External Chat Overview.....	53
Manage Customer Queries from External Messaging Channels.....	56
Configure Chat Notifications.....	61
<b>CTI.....</b>	<b>65</b>
Linkus Desktop Client CTI Overview.....	65
Control a Yealink IP Phone by Linkus Desktop Client.....	69
Control a Fanvil IP Phone by Linkus Desktop Client.....	72
Control a Snom IP Phone by Linkus Desktop Client.....	74
Control an Incompatible IP phone by Linkus Desktop Client.....	77
<b>Hotkeys.....</b>	<b>79</b>
Set up Hotkeys.....	79
Select and Dial with Hotkey.....	82
<b>Calls.....</b>	<b>85</b>
Linkus Call Overview.....	85
Flip an Active Call between Devices.....	86
Continue an Active Call on Linkus Desktop Client.....	88
Transfer a call.....	90
Merge Calls into an Audio Conference Call.....	95
Hold and Resume a Call.....	97
Record a Call.....	98
<b>Audio Conferencing.....</b>	<b>99</b>
Audio Conferencing Overview.....	99
Invite Participants to an Audio Conference Call.....	99
Audio Conference Call Operations.....	102
Exit or End an Audio Conference.....	106
<b>Call Logs.....</b>	<b>108</b>
Check and Manage Call Logs.....	108


<b>Voicemails.....</b>	<b>112</b>
Check and Manage Voicemails.....	112
<b>Recordings.....</b>	<b>114</b>
Check and Manage Recordings.....	114
<b>Upgrade.....</b>	<b>118</b>
Upgrade Linkus Desktop Client.....	118
<b>Bug Reporting.....</b>	<b>120</b>
Report Linkus Problems.....	120
<b>Extension Preferences.....</b>	<b>121</b>
User.....	121
Update Your Extension Profile.....	121
View Outbound Caller ID.....	121
View Emergency Outbound Caller ID.....	122
Presence.....	123
Configure Presence Settings.....	123
Manually Switch Presence Status.....	127
Automatically Switch Presence Status Based on Business Hours and Holidays.....	128
Voicemail.....	129
Customize Your Voicemail Settings.....	129
Upload or Record Voicemail Greetings.....	131
Manage Personal Voicemail Greetings.....	134
Audio and Video.....	135
Configure Audio and Video Devices.....	135
Integrate HID-compliant Headsets with Linkus Desktop Client.....	136
Email Notification.....	138
Enable Email Notifications for Missed Calls and Password Changes.....	138
Call.....	139
Handle Incoming Calls Based on Caller ID.....	139
Stop Rejected Calls from Ringing Other Endpoints.....	140
Popup URL.....	141
Set up Third-party Integration for Call Popup.....	141
Function Key.....	143

Configure Function Keys.....	143
<b>Integration.....</b>	<b>149</b>
Microsoft Outlook Integration.....	149
Microsoft Outlook Integration Overview.....	149
Integrate Linkus Desktop Client with Outlook for Windows.....	150
Use Microsoft Outlook Integration.....	153
Disable Microsoft Outlook Integration.....	156
TAPI Integration.....	159
Integrate Linkus Desktop Client with TAPI.....	159

# Linkus Desktop Client Overview

Running on Windows and macOS, Linkus Desktop Client provides you with access to enterprise-grade telephony features from your computer desktop.

## Linkus Desktop Client layout

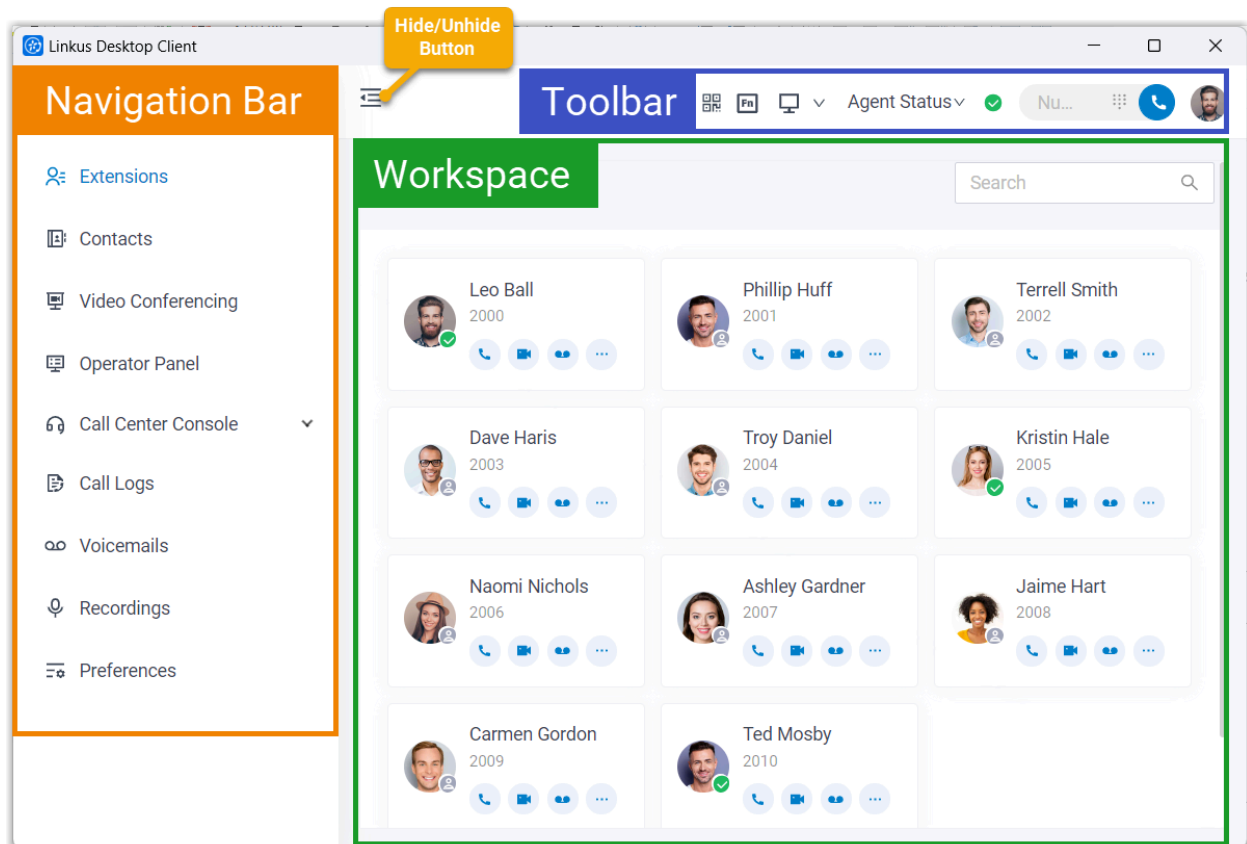




1. [Navigation bar](#)
2. [Toolbar](#)
3. [Workspace](#)

## Navigation bar

Navigation bar provides quick access to the following features:






Feature	Description
<b>Extensions</b>	<ul style="list-style-type: none"><li>• View colleague information.</li><li>• Place audio or video calls to colleagues.</li><li>• Leave voicemails for colleagues.</li></ul>

Feature	Description
	<ul style="list-style-type: none"> <li>• Add colleague extensions to Favorites list.</li> </ul>
<b>Contacts</b>	<ul style="list-style-type: none"> <li>• View, add, and manage personal contacts.</li> <li>• View, add, and manage company contacts.</li> </ul>
<b>Video Conferencing</b>	<p>Initiate face-to-face meetings for instant communication among team members and customers. For more information, see <a href="#">Video Conferencing User Guide</a>.</p> <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-top: 10px;"> <p> <b>Note:</b> Linkus Desktop Client only provides a menu entry for the feature. When you access the feature, you will be redirected to the feature on Linkus Web Client without entering any credentials.</p> </div>
<b>Operator Panel</b>	<p>Manage calls of members in a specific group. For more information, see <a href="#">Operator Panel User Guide</a>.</p> <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-top: 10px;"> <p> <b>Note:</b> Linkus Desktop Client only provides a menu entry for the feature. When you access the feature, you will be redirected to the feature on Linkus Web Client without entering any credentials.</p> </div>
<b>Call Center Console</b>	<p>Handle queue calls and achieve real-time call monitoring, management, and reporting. For more information, see <a href="#">Call Center Console User Guide</a>.</p> <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-top: 10px;"> <p> <b>Note:</b> Linkus Desktop Client only provides a menu entry for the feature. When you access the feature, you will be redirected to the feature on Linkus Web Client without entering any credentials.</p> </div>
<b>Call Logs</b>	Check and manage your call logs.
<b>Voicemails</b>	Check and manage your voicemails.
<b>Recordings</b>	Check and manage your call recording files.
<b>Preferences</b>	<p>Configure the following settings:</p> <ul style="list-style-type: none"> <li>• Extension profile</li> <li>• Extension presence</li> <li>• Voicemail</li> <li>• Audio and video</li> <li>• Function keys</li> <li>• Call-handling rules</li> <li>• Email notifications</li> </ul>

Feature	Description
	<ul style="list-style-type: none"> <li>• Outlook integration</li> </ul>

## Toolbar

Toolbar provides quick access to common actions:

Feature	Description
	Quick access to download Linkus Mobile Client and Yeastar Linkus for Google.
	Use function keys to monitor status of specific objects or quickly perform specific operations via function keys.
	Switch between Desktop Client mode and CTI mode.
Agent Status	Change your status in a queue.
	Change extension presence.
	Place audio calls or video calls.
Account	<ul style="list-style-type: none"> <li>• Change password</li> <li>• Configure two-factor authentication (2FA)</li> <li>• Check Privacy Policy Agreement</li> <li>• Access Linkus Help Center</li> <li>• Access Support Portal</li> <li>• Log out of Linkus</li> </ul>

## Workspace

An area where you can view or manage specific features.



# Getting Started

## Log in to Linkus

### Linkus Login Overview

Linkus allows you to log in to Desktop Client using different methods, including logging in with your extension account via a login link, one-click login from Linkus Web Client, entering login information, or directly logging in with a third-party account.

#### **Extension account login**

You can log in to Linkus with your extension account using login link, one-click login, or manually-entered login information.

##### **Quick login**

- After you receive a Linkus welcome email, you can obtain a login link from the email, via which you can quickly log in to Linkus Desktop Client.

For more information, see [Log in to Linkus with Extension Account Using Login Link](#).

- You can quickly log in to your Desktop Client from Linkus Web Client by just one click.

For more information, see [Log in to Linkus with Extension Account by One Click](#).

##### **Manual login**

You need to contact system administrator to obtain your username and password, as well as the Linkus Server network information, then enter the information on Linkus Desktop Client to log in.

For more information, see [Log in to Linkus with Extension Account Using Manually-Entered Credentials](#).

## Third-party account login

If system administrator has integrated the server with a third-party system, you can directly log in to Linkus Desktop Client with the third-party account.

For more information, see the following topics:

- [Log in to Linkus with Microsoft Account](#)
- [Log in to Linkus with Active Directory Domain Account](#)

## Log in to Linkus with Extension Account Using Login Link

After you receive a Linkus welcome email, you can use the login link to quickly log in to Linkus Desktop Client with your extension account.

### Prerequisites


You have received the Linkus welcome email.




#### Note:


- If you don't receive the Linkus welcome email, contact system administrator.
- The login link is valid in 24 hours and can only be used once.

### Procedure

1. In the Linkus welcome mail, copy the login link.
2. Open Linkus Desktop Client, and click  at the top-right corner.

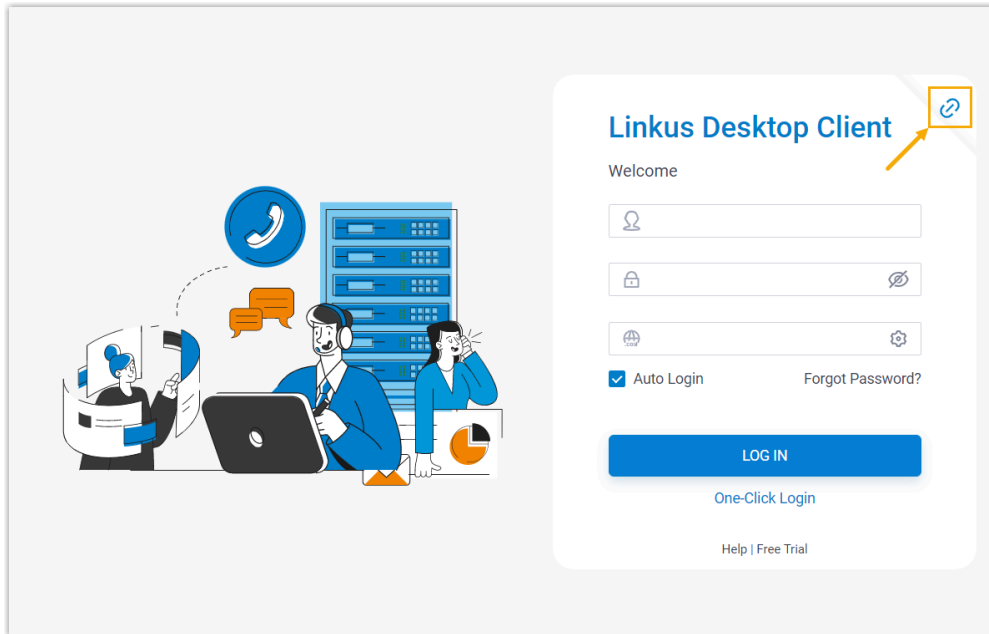


3. Paste the link on Linkus, then click **LOG IN**.

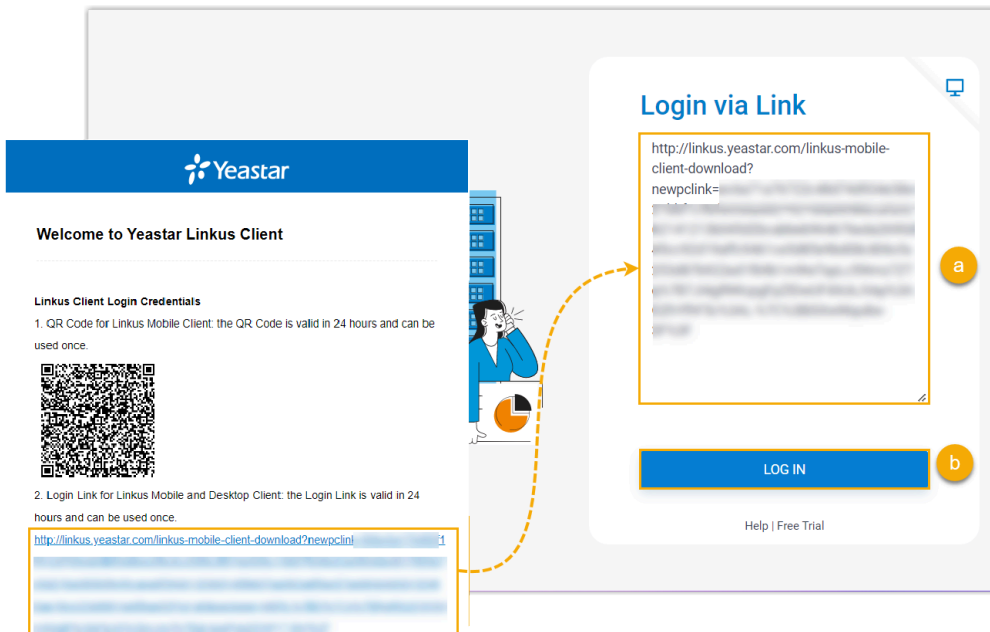

Linkus detects the account information and asks if you want to log in with the account.

4. In the pop-up window, click **Confirm**.

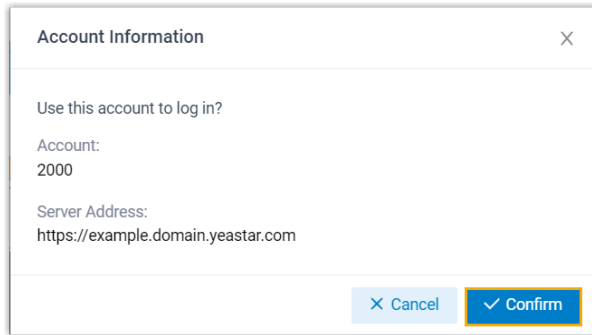**Note:**

If it is the first time that you log in to Linkus with extension account, you will be asked to agree a privacy policy agreement and change the initial password. When finished, you need to log in to Linkus with the new password.

## Log in to Linkus with Extension Account by One Click


Yeastar supports one-click login for Linkus Desktop Client, you can conveniently access your Linkus Desktop Client from Web Client with just one click.

### Prerequisites

You have installed [Linkus Desktop Client](#) on your computer.


### Procedure

1. On Linkus Web Client, click  on the top bar, then click .

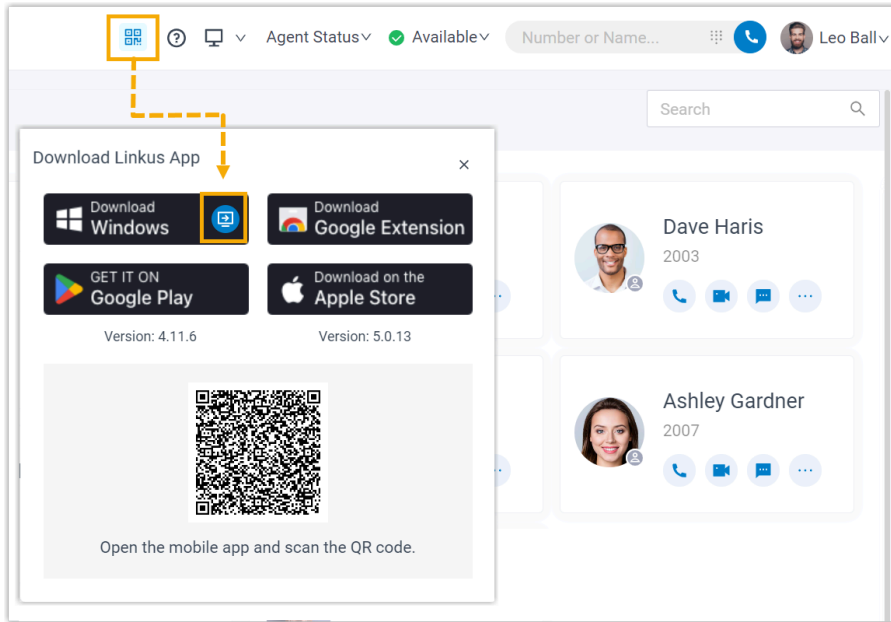

A window pops up, asking if you allow the system to open the application.

2. On the pop-up window, do as follows:

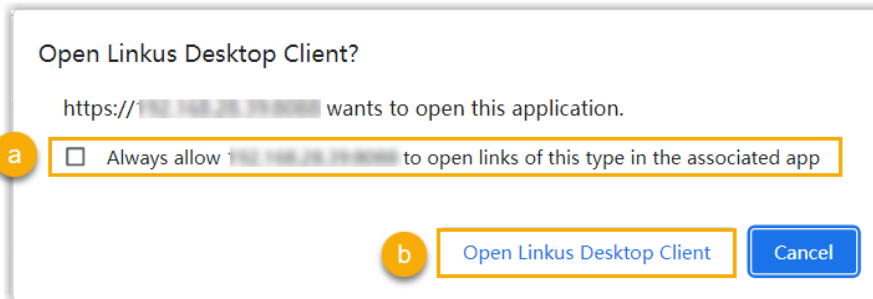

a. If you want the system to open Linkus Desktop Client without asking again, select the checkbox.

b. Click to open the Linkus Desktop Client.

You are logged into Linkus Desktop Client without entering any credentials.

## Log in to Linkus with Extension Account Using Manually-Entered Credentials


This topic describes how to log in to Linkus Desktop Client with your extension account by manually entering login information.

## Prerequisites


Contact system administrator to obtain your username and password, as well as the domain name of the server.

## Procedure

1. On Linkus login page, enter the login information.

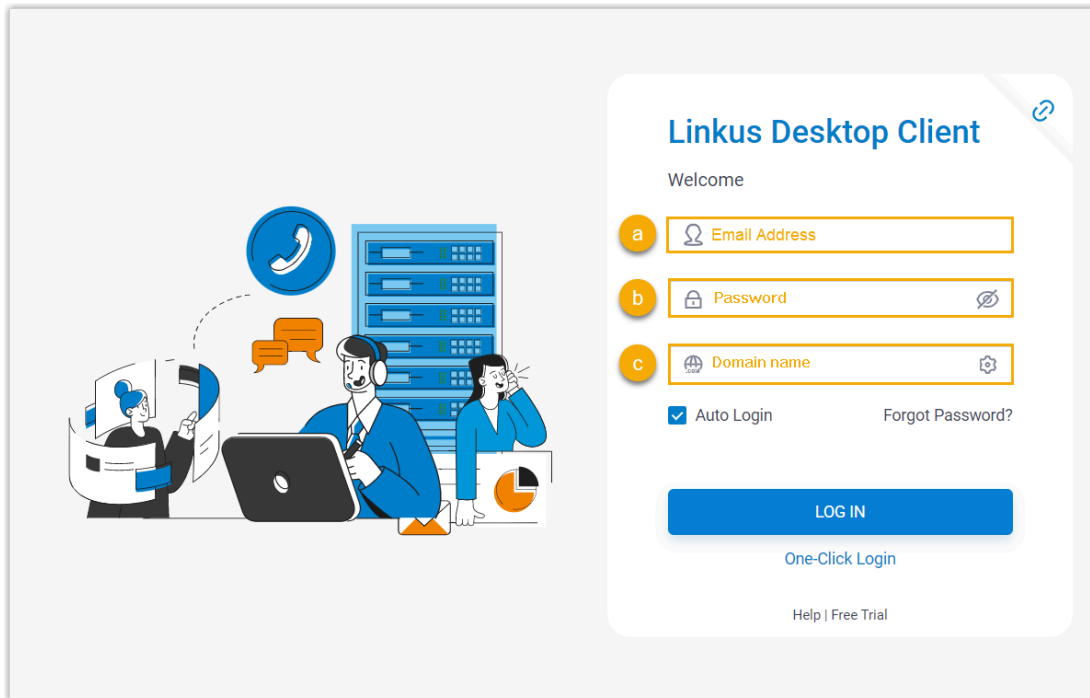

- a. In the **Username** field, enter your email address.
  - b. In the **Password** field, enter the password associated with the user name.
  - c. In the **Domain** field, enter the domain name.
2. **Optional:** Select or unselect the **Auto Login** option to decide whether to automatically log in to this account next time you open Linkus Desktop Client.
  3. Click **LOG IN**.
  4. If you have set up [two-factor authentication](#), you need to enter an authentication code.

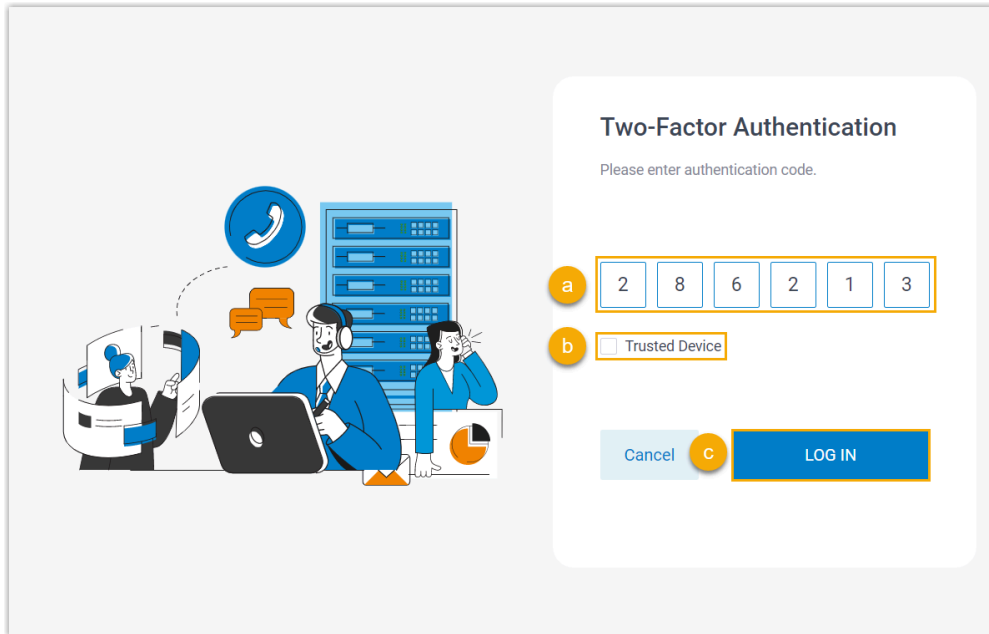

- a. Enter the authentication code provided by an authenticator application or email.
- b. **Optional:** Select the checkbox of **Trusted Device**.

**Note:**

For the device from which you log in most frequently, you can select the option to add it as a trusted device. In this way, you don't have to re-enter an authentication code with this device for the next 180 days.

- c. Click **LOG IN**.

**Note:**

If it is the first time that you log in to Linkus with extension account, you will be asked to agree a privacy policy agreement and change the initial password. When finished, you need to log in to Linkus with the new password.

## Log in to Linkus with Microsoft Account


If system administrator integrates the server with Microsoft Entra ID (Azure Active Directory), you can log in to Linkus with your Microsoft account directly.

## Requirements

- System administrator has integrated the server with **Microsoft Entra ID**, and enabled **Single Sign-on (SSO)** feature.
- Your Linkus version meets the following requirement:
  - **Linkus Windows Desktop**: Version 1.4.9 or later
  - **Linkus Mac Desktop**: Version 1.4.9 or later

## Procedure

1. On Linkus login page, click **Sign in with Microsoft**.

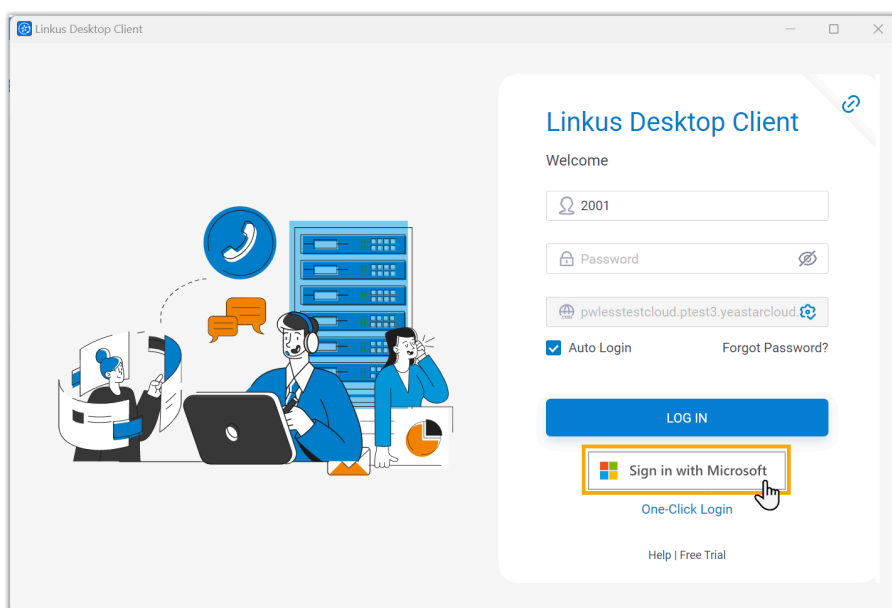

You are redirected to the Microsoft sign-in page.

2. Sign in to your Microsoft account.

After signed-in, you are automatically logged in to Linkus Desktop Client.

## Log in to Linkus with Active Directory Domain Account

If system administrator integrates the server with Active Directory (AD), you can log in to Linkus with your AD domain account directly.



## Requirements

- System administrator has integrated the server with **Active Directory**, and enabled **Single Sign-on (SSO)** feature.
- Your Linkus version meets the following requirement:
  - **Linkus Windows Desktop**: Version 1.4.9 or later
  - **Linkus Mac Desktop**: Version 1.4.9 or later

## Prerequisites

Contact system administrator to obtain the network information of Linkus Server.



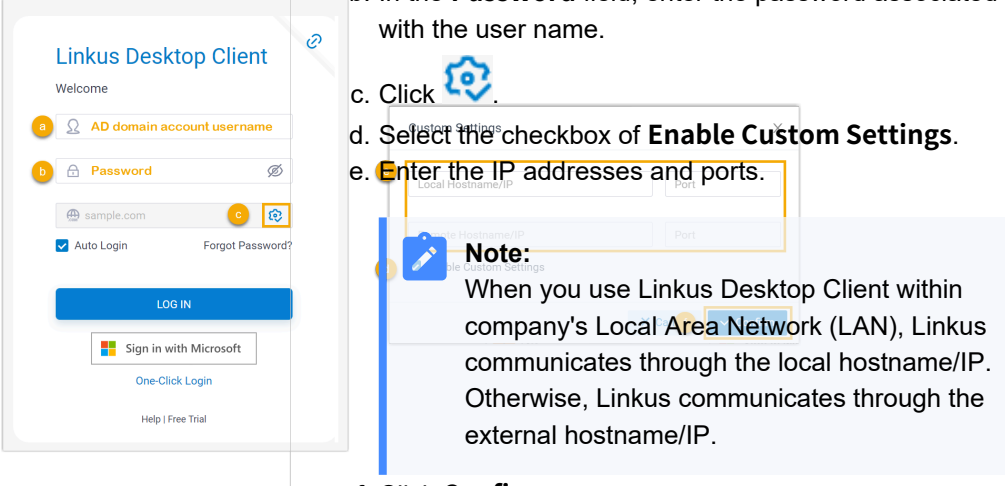



### Note:

The network information might be a domain name, or IP addresses and ports, depending on the Linkus Server's network configuration.

## Procedure

1. On Linkus login page, enter the following information.

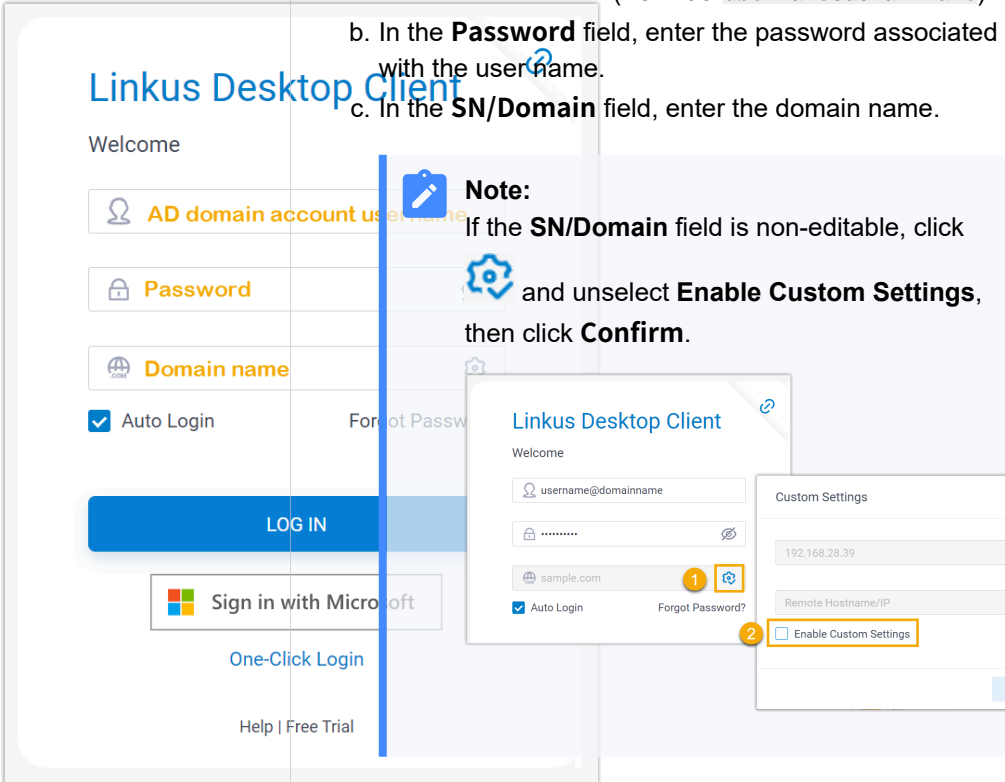Scenario	Procedure
<p data-bbox="386 260 578 359"><b>Figure 1. Log in using domain name</b></p> 	<p data-bbox="683 260 1183 289">If you obtain a domain name, do as follows:</p> <ol style="list-style-type: none"> <li data-bbox="735 315 1377 380">In the <b>Username</b> field, enter the user name of your AD domain account (<b>Format:</b> <code>username@domainname</code>).</li> <li data-bbox="735 390 1382 455">In the <b>Password</b> field, enter the password associated with the user name.</li> <li data-bbox="735 466 1325 495">In the <b>SN/Domain</b> field, enter the domain name.</li> </ol> <p data-bbox="789 548 1365 716"><b>Note:</b> If the <b>SN/Domain</b> field is non-editable, click  and unselect <b>Enable Custom Settings</b>, then click <b>Confirm</b>.</p>
<p data-bbox="386 1184 573 1325"><b>Figure 2. Log in using IP addresses and ports</b></p> 	<p data-bbox="683 1184 1273 1213">If you obtain IP addresses and ports, do as follows:</p> <ol style="list-style-type: none"> <li data-bbox="735 1239 1377 1304">In the <b>Username</b> field, enter the user name of your AD domain account (<b>Format:</b> <code>username@domainname</code>).</li> <li data-bbox="735 1314 1382 1379">In the <b>Password</b> field, enter the password associated with the user name.</li> <li data-bbox="735 1415 878 1444">Click .</li> <li data-bbox="735 1455 1344 1484">Select the checkbox of <b>Enable Custom Settings</b>.</li> <li data-bbox="735 1495 1149 1524">Enter the IP addresses and ports.</li> </ol> <p data-bbox="789 1577 1377 1787"><b>Note:</b> When you use Linkus Desktop Client within company's Local Area Network (LAN), Linkus communicates through the local hostname/IP. Otherwise, Linkus communicates through the external hostname/IP.</p> <p data-bbox="735 1814 938 1843">f. Click <b>Confirm</b>.</p>


2. Click **Login**.

## Reset Linkus Password

If you forget Linkus login password, you can reset password on Linkus Desktop Client.

### Procedure

1. On Linkus Desktop Client login page, click **Forgot Password?**
2. In the **Forgot Password** page, do as follows:

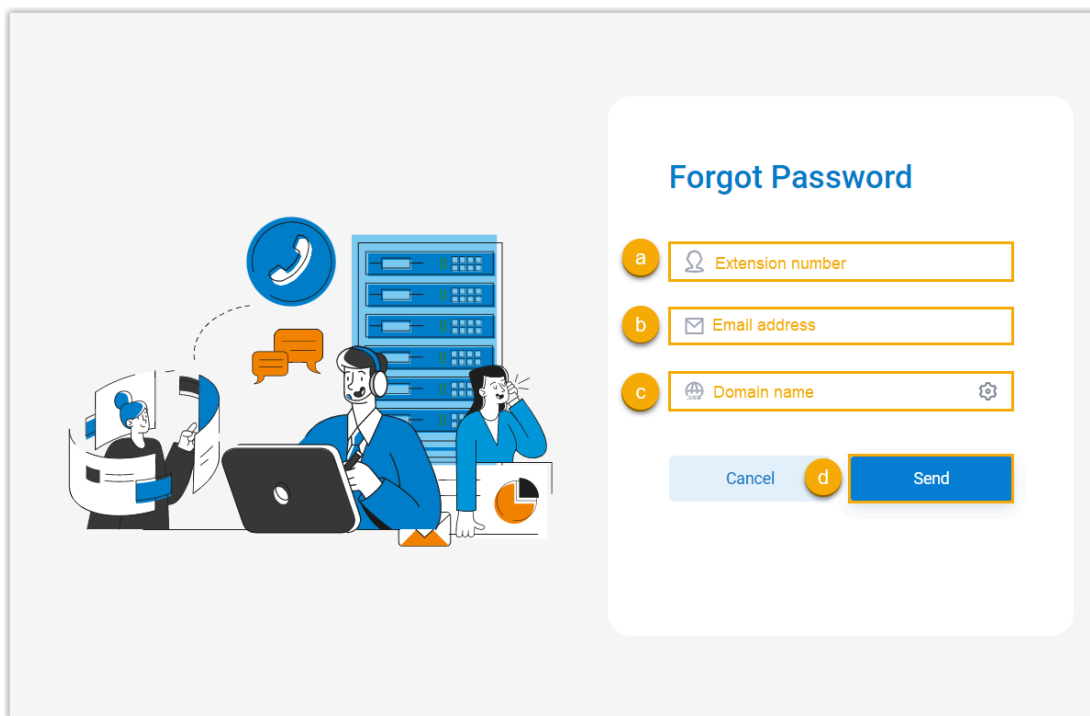


- a. In the **Extension Number** field, enter your extension number.
  - b. In the **Email Address** field, enter the email address that is bound with your extension.
  - c. In the **Domain** field, enter the domain name of the server.
  - d. Click **Send**.
- A password reset email is sent to your mailbox.
3. In the password reset email, click the password reset link.

 **Note:**



The link is valid for 30 minutes and can only be used once.



## Reset Password

You have recently requested to reset the password for your PBX extension. To reset the password, please click on the Password Reset Link below or use the Verification Code to reset the password on your mobile client.

Password Reset Link:

[https://\[redacted\]/modify\\_password?reset\\_token=HnC1nMIXOE5GVC7p0yGhBpGqYYocowD](https://[redacted]/modify_password?reset_token=HnC1nMIXOE5GVC7p0yGhBpGqYYocowD)

Verification Code:


**309008**

Note:

the link and the verification code are valid for 30 minutes and can only be used once.

You are redirected to a **Reset Password** web page.

4. On the **Reset Password** web page, enter your new password twice, and click **Save**.

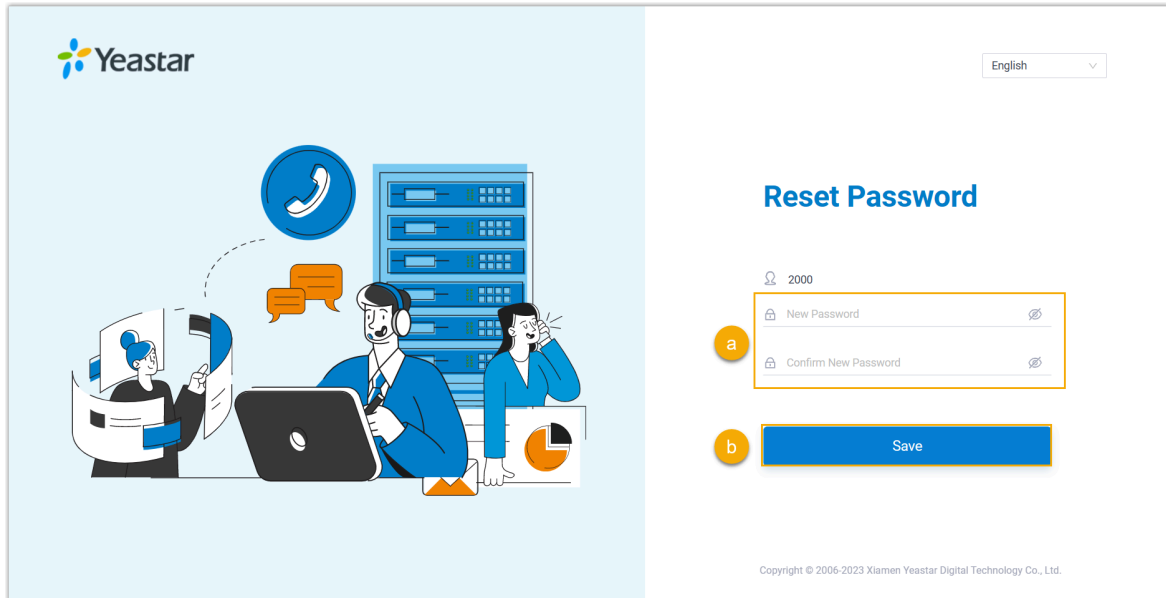

The login password is changed.

## What to do next


Log in to Linkus with the new password.


## Change the Display Language

You can change the display language of Linkus Desktop Client as needed.


### Procedure

1. Access the menu of Linkus Desktop Client based on your operating system.

- **For Windows:** At the system tray, right click .

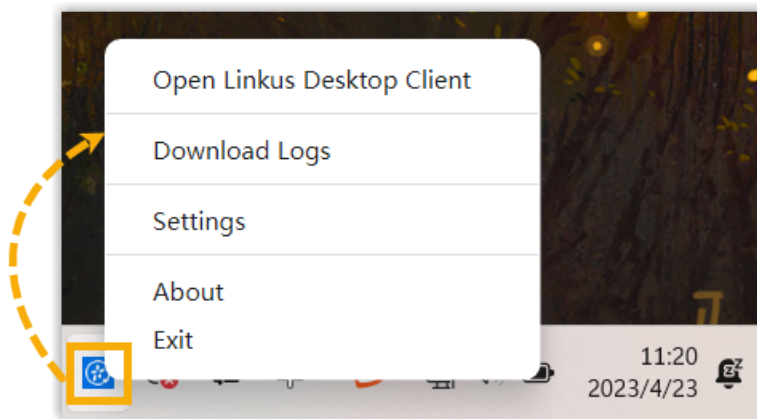

- **For macOS:** On the App menu, click **Linkus Desktop Client**.

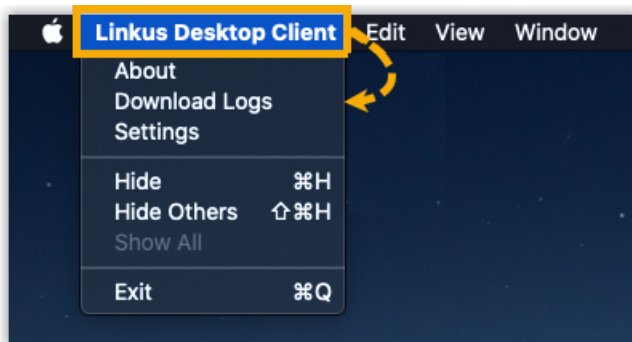

2. Select **Settings** from the menu.

A **Settings** window pops up.

3. In the **Language** drop-down list, select the desired language.
4. In the pop-up window, click **Reboot Now**.


## Set Linkus Desktop Client to Run at Startup on a Computer

You can configure Linkus Desktop Client to automatically launch when your computer starts up.


### Procedure

1. Access the menu of Linkus Desktop Client based on your operating system.

- **For Windows:** At the system tray, right click .

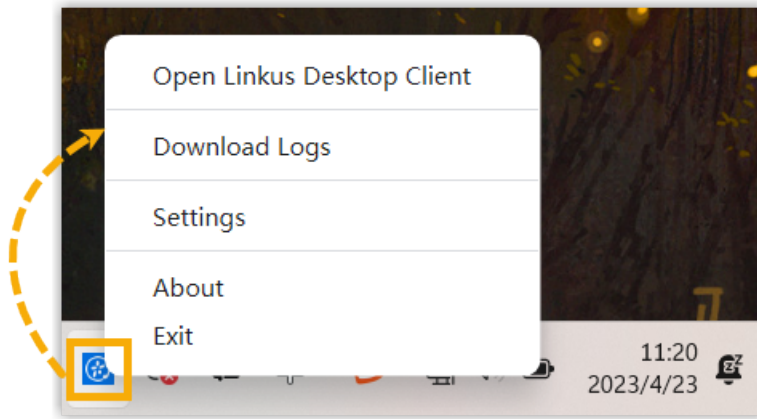


- **For macOS:** On the App menu, click **Linkus Desktop Client**.

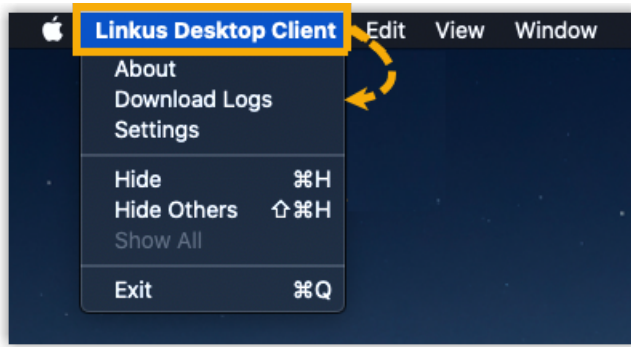

2. Select **Settings** from the menu.

A **Settings** window pops up.

3. In the **System** section, select the checkbox of **Auto Startup**.

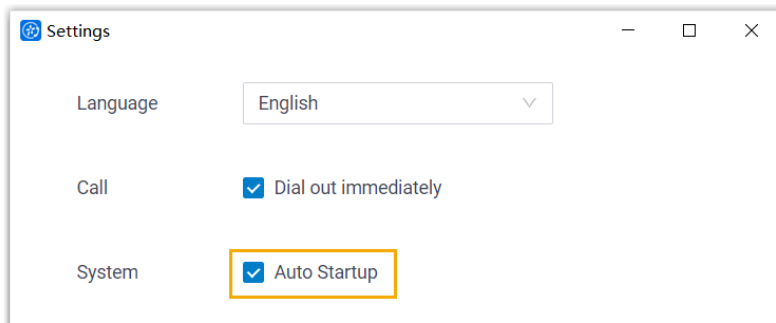

## Result

Linkus Desktop Client will automatically launch and run when your computer boots up.



**Note:**




If you have enabled [Auto Login](#), your account will be automatically logged in when Linkus Desktop Client is launched.

## Log out of Linkus

This topic describes how to log out of Linkus Desktop Client.

### Procedure

1. At the top-right corner of Linkus Desktop Client, click your account.
2. In the drop-down list, click **Log out**.

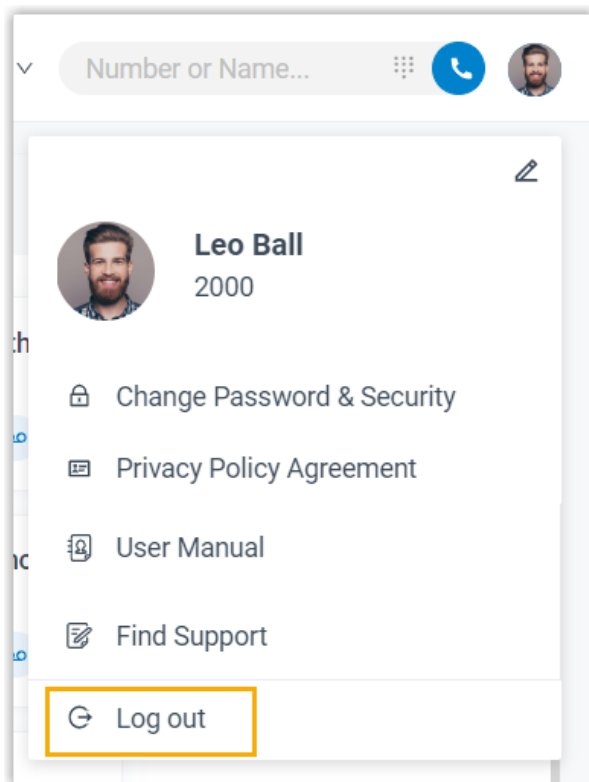



# Two-Factor Authentication (2FA)

## Two-factor Authentication (2FA) Overview

Linkus Desktop Client allows you to configure two-factor authentication (2FA) for your account. With 2FA enabled, both your account password and an additional authentication code are required for Linkus login, which adds an extra layer of security to your account. This topic provides an overview of the supported two-factor authentication methods.

### Requirements

System administrator has upgraded the server to 84.10.0.30 or later.

### Two-factor authentication by authenticator application

This method requires you to install an authenticator application on your mobile phone. The supported applications are listed below:

- [Google Authenticator](#)
- [FreeOTP](#)
- [Twilio Authy](#)
- [Microsoft Authenticator](#)

After installing an authenticator application, you need to add your account to the application, via which you can obtain authentication codes for two-factor authentication. When you log in to your account, both account password and the authentication code generated by the authenticator application are required.

For more information about the configuration, see [Configure Two-Factor Authentication Using Authenticator Application](#).

### Two-factor authentication by Email

This method allows you to receive authentication codes for two-factor authentication via the email that you use to log in. When you log in to your account, both account password and the authentication code sent to your email are required.

For more information about the configuration, see [Configure Two-Factor Authentication Using Email](#).

# Configure Two-Factor Authentication Using Authenticator Application

This topic describes how to configure two-factor authentication using an authenticator application on your mobile phone.



## Note:

The configurations of two-factor authentication is applied to all your Linkus clients.

## Prerequisites




You have installed one of the following supported authenticator applications on your mobile phone.

- [Google Authenticator](#)
- [FreeOTP](#)
- [Twilio Authy](#)
- [Microsoft Authenticator](#)

## Procedure

1. At the top-right corner of Linkus Desktop Client, click your account, then go to **Change Password & Security > Security Settings**.
2. Select the checkbox of **Two-Factor Authentication**.
3. In the pop-up **Password** window, enter your account password and click **Confirm** to verify your operation.
4. Select **Authenticated by Authenticator**.
5. Add your account to the authenticator application via either of the following methods.

Method	Instruction
Scan QR Code to quickly add the account	<p>You can quickly add your account to the authenticator application by scanning the QR code provided by Linkus Desktop Client.</p> <ol style="list-style-type: none"> <li>a. On your mobile phone, open the authenticator application, and select to scan QR code.</li> <li>b. Scan the QR code shown on Linkus Desktop Client.</li> </ol>

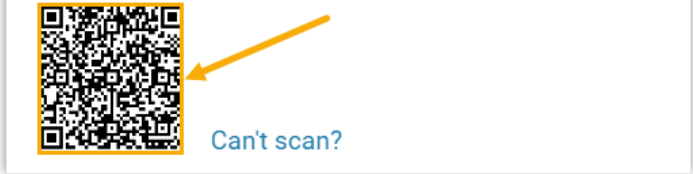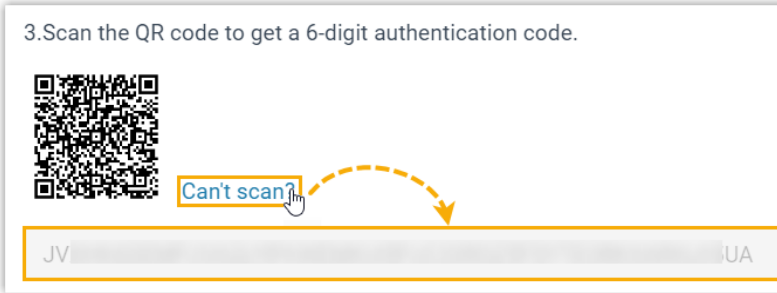Method	Instruction
	<p data-bbox="646 281 1289 310">3.Scan the QR code to get a 6-digit authentication code.</p>  <p data-bbox="617 546 1347 609">Your account is added to the application automatically, a 6-digit authentication code is shown.</p>
<p data-bbox="308 646 509 709">Manually add the account</p>	<p data-bbox="539 646 1360 709">In case you can not scan QR code, you can manually add your account and enter the secret key provided by Linkus Desktop Client.</p> <ol data-bbox="587 722 1360 835" style="list-style-type: none"> <li data-bbox="587 722 1360 751">a. On Linkus Desktop Client, click <b>Can't scan</b> beside the QR code.</li> </ol> <p data-bbox="617 772 1380 835">A secret key is displayed under the QR code, note it down for later use.</p>  <ol data-bbox="587 1171 1334 1276" style="list-style-type: none"> <li data-bbox="587 1171 1334 1239">b. On your mobile phone, open the authenticator application, and select to manually add an account.</li> <li data-bbox="587 1247 1253 1276">c. Enter the relevant information and paste the secret key.</li> </ol> <div data-bbox="623 1306 1386 1528" style="border: 1px solid #ccc; padding: 10px; margin: 10px 0;"> <p data-bbox="646 1327 685 1369"> <b>Note:</b></p> <p data-bbox="701 1369 1370 1507">If you need to complete more configurations for the secret key, you should set <b>SHA1</b> as the algorithm for <b>TOTP</b> protocol, and set to generate <b>6-digit</b> code with an interval of <b>30</b> seconds.</p> </div> <p data-bbox="617 1558 1357 1621">Your account is added to the application, a 6-digit authentication code is shown.</p>

6. On Linkus Desktop Client, enter the 6-digit authentication code in the **Authentication Code** field.
7. Click **Save**.

## Result

- The page prompts a message "Edited successfully.", which means that you have successfully set up two factor authentication.
- Next time you log in to Linkus UC clients (Web Client, Desktop Client, and Mobile Client) using the email address and password of your extension account, you need to enter an authentication code additionally.



### Troubleshooting:

#### What if I fail to log in with two-factor authentication?

If you lose access to your two-factor authentication (e.g. you lost your device or could not receive authentication code via email), contact system administrator to disable the two-factor authentication for your account, so that you can directly log in with your email address and password.

## Related information

[Manage Two-Factor Authentication](#)

# Configure Two-Factor Authentication Using Email

This topic describes how to configure two-factor authentication using email.



### Note:

The configurations of two-factor authentication is applied to all your Linkus clients.

## Procedure

1. At the top-right corner of Linkus Desktop Client, click your account, then go to **Change Password & Security > Security Settings**.
2. Select the checkbox of **Two-Factor Authentication**.
3. In the pop-up **Password** window, enter your account password and click **Confirm** to verify your operation.
4. Select **Authenticated by Email**, and complete the following settings:

Authenticated by Email

1. The authentication code will be sent to [example@yeastar.com](mailto:example@yeastar.com) .

**a**

2. Enter the authentication code.

**b** \* Authentication Code

**c**

a. Click **Send**.

An email containing a 6-digit authentication code is sent to the email address that you use to log in.



**Note:**

The code expires 5 minutes after the email is sent.

b. In the **Authentication Code** field, enter the authentication code.

c. Click **Save**.

## Result

- The webpage prompts a message "Edited successfully.", which means that you have successfully set up two-factor authentication.
- Next time you log in to Linkus UC clients (Web Client, Desktop Client, and Mobile Client) using the email address and password of your extension account, you need to enter an authentication code additionally.



**Note:**

In later use, if the email address associated with your extension is changed, the two-factor authentication will be disabled automatically.



**Troubleshooting:**



### What if I fail to log in with two-factor authentication?

If you lose access to your two-factor authentication (e.g. you lost your device or could not receive authentication code via email), contact system administrator to disable the two-factor authentication for your account, so that you can directly log in with your email address and password.

#### Related information

[Manage Two-Factor Authentication](#)

## Manage Two-Factor Authentication


This topic describes how to manage the two-factor authentication feature, including removing trusted devices, changing authentication method, and disabling the two-factor authentication feature.

### Remove a trusted device

In case you lost access to a trusted device, you can remove it from the list if necessary.

1. At the top-right corner of Linkus Desktop Client, click your account, then go to **Change Password & Security > Security Settings**.

The trusted devices are displayed in the **Trusted Device List** section.

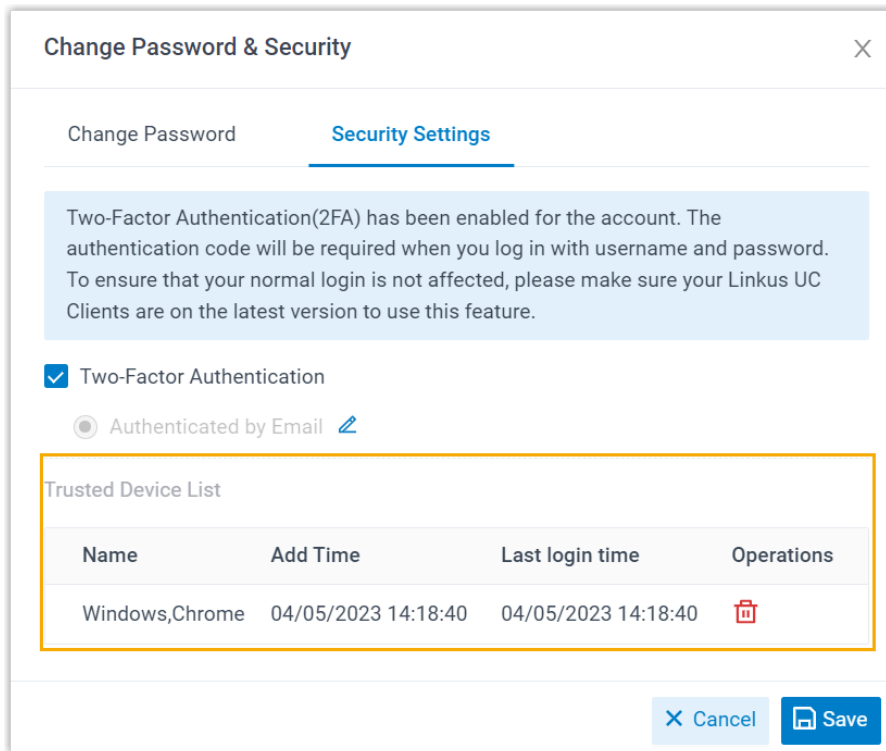

2. Click beside the device that you want to remove.
3. In the pop-up window, click **OK**.

## Change two-factor authentication method

1. At the top-right corner of Linkus Desktop Client, click your account, then go to **Change Password & Security > Security Settings**.
2. Click [↗](#) beside the current authentication method.
3. Select the desired method, then complete the follow-up settings accordingly.

## Disable two-factor authentication

1. At the top-right corner of Linkus Desktop Client, click your account, then go to **Change Password & Security > Security Settings**.
2. Unselect the checkbox of **Two-Factor Authentication**.
3. In the pop-up **Password** window, enter your account password and click **Confirm** to verify your operation.
4. In the **Security Settings** tab, click **Save**.

The page prompts a message "Edited successfully.", which means that you have successfully disabled two-factor authentication.

**Related information**

[Configure Two-Factor Authentication Using Authenticator Application](#)

[Configure Two-Factor Authentication Using Email](#)



# Extensions

## View Colleague Extensions

This topic describes how to view colleague extensions and quickly reach colleagues.


### Procedure

1. Log in to Linkus Desktop Client, go to **Extensions**.
2. **Optional:** Select the group or department to which the desired extension belongs.




**Note:**

By default, all the extensions within the selected group or department are displayed, whether the extensions are registered or not. You can choose to display only the registered extensions. For more information, see [View Registered Extensions Only](#).


- To select a group, click  at the top-left corner, then select one from the drop-down list.

Extensions within the group are displayed.

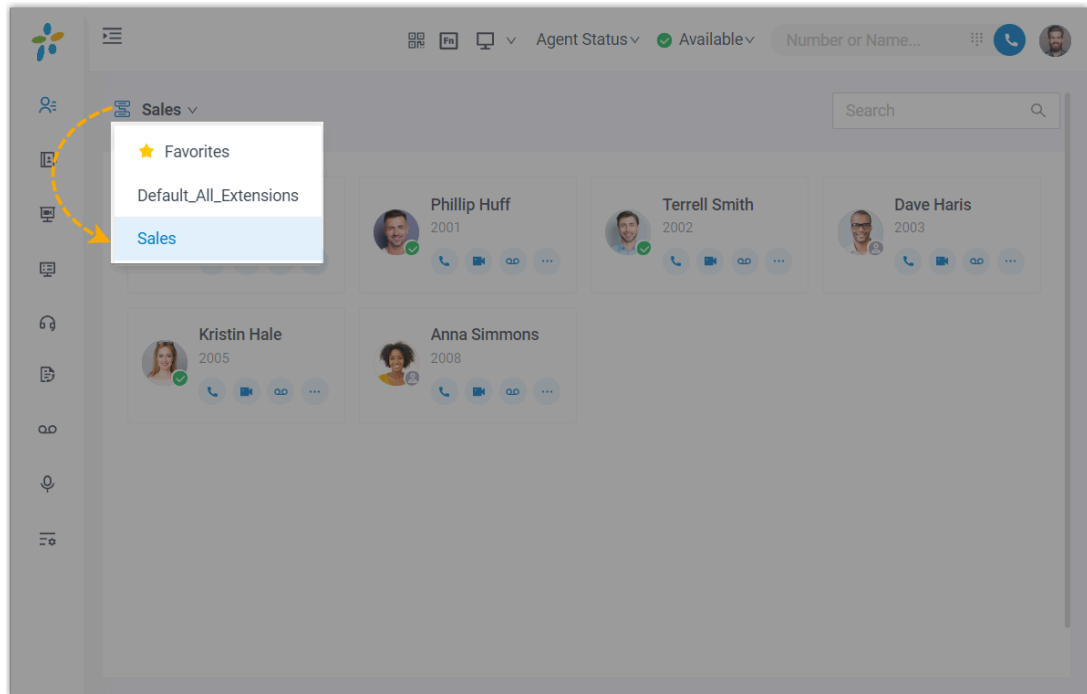


- To select a department, click the desired department from the organizational tree.



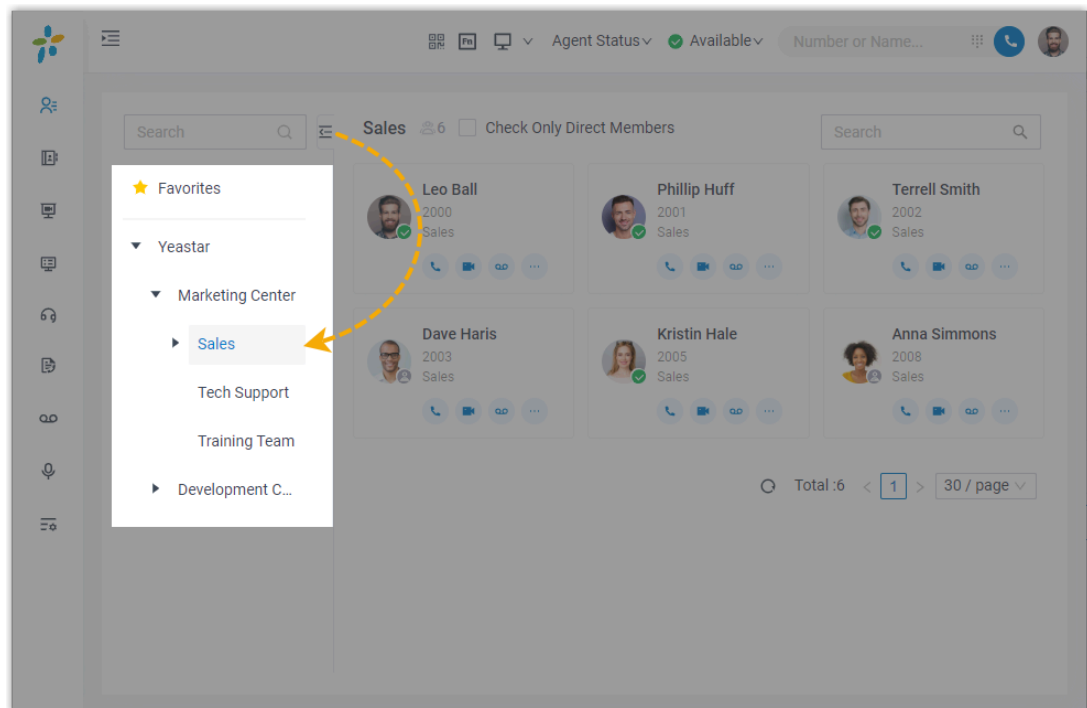

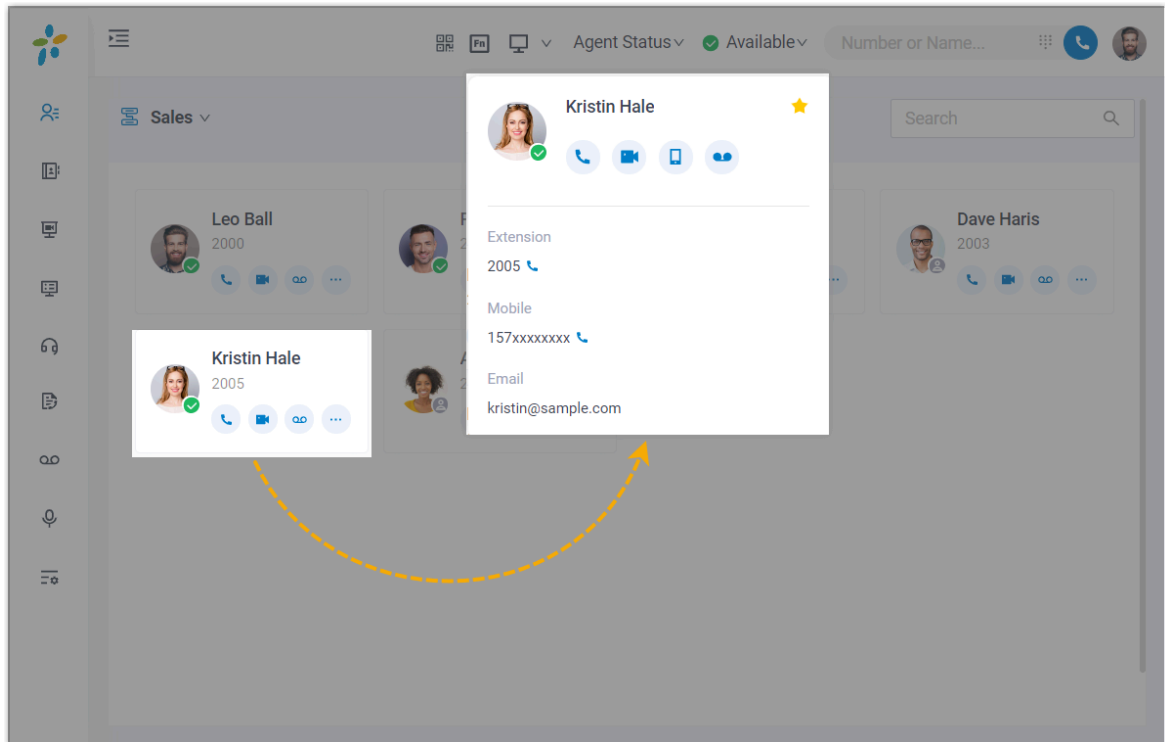


Extensions within the department are displayed.



3. To view details about a specific colleague, click the contact card.



**4. Optional:** Click specific icons to manage or reach colleagues.

Icon	Description
	<p>Add to the <b>Favorites</b> list.</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <p> <b>Note:</b></p> <ul style="list-style-type: none"> <li>• The <b>Favorites</b> list is displayed only when you add extensions to favorites. You can see the list by clicking  at the top-left corner.</li> <li>• For the colleagues whom you communicate with most often, you can add their extensions to the favorite list, so that you can quickly contact them.</li> </ul> </div>
	<p>Place an audio call to the extension.</p>
	<p>Place a video call to the extension.</p>
	<p>Call mobile number.</p>
	<p>Leave a voicemail to the extension.</p>

## View Registered Extensions Only

By default, all the extensions within the selected group or department are displayed on Linkus Desktop Client, whether the extensions are registered or not. You can configure to show only the registered extensions.

### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > User > Status View**.
2. Unselect the checkbox of **Show Unregistered Extensions**.
3. Click **Save**.

# Contacts

## Contacts Overview

Linkus Contacts provides an overview of your external contacts that are stored on the server. The Linkus Contacts is subdivided into two types, namely personally managed contacts (stored in **Personal Contacts**) and shared contacts (stored in **Company Contacts** or phonebook).

### Personal Contacts

The **Personal Contacts** is only visible to yourself. You can store your own external contacts (such as direct customers) in it.

For more information, see the following topics:

- [Add a Personal Contact](#)
- [Manage Personal Contacts](#)
- [Import and Export Personal Contacts](#)

### Company Contacts

The **Company Contacts** or phonebook is shared among authorized colleagues. You can store external contacts (such as company's customers, resellers, and partners) in it, so as to share contact information with your team members and thus enhancing team collaboration.



**Note:**

If you fail to see **Company Contacts** or specific phonebooks, it indicates that you don't have the viewing permission. Contact system administrator to grant you the permission if necessary.

For more information, see the following topics:

- [Add a Company Contact](#)
- [Manage Company Contacts](#)

## Favorite Contacts

For contacts (both **Personal Contacts** and **Company Contacts**) that you are frequently or commonly communicated with, you can mark them as favorites. The marked contacts will be displayed in the **Favorite Contacts** list for quick location and retrieval.

For more information, see [Mark or Remove Favorite Contacts](#).

## Personal Contacts

### Add a Personal Contact


This topic describes how to add a personal contact. The personal contacts you add will be synchronized across your Linkus UC Clients and are only visible to yourself, other colleagues can not see your personal contacts.


### Supported methods

Linkus Desktop Client supports to add a personal contact via any of the following methods:

- [Manually add a personal contact](#)
- [Add a personal contact from call logs](#)
- [Add a personal contact from Voicemails list](#)
- [Add a personal contact from Recordings list](#)
- [Add a personal contact from company contacts](#)

### Manually add a personal contact

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

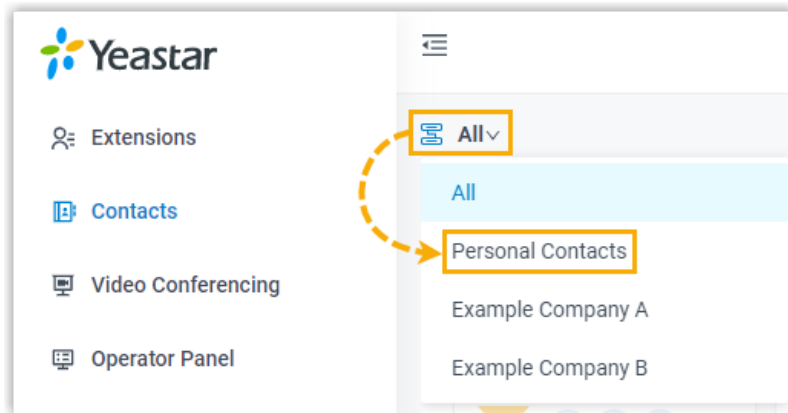

3. Click **Add**.
4. On the contact details page, enter the information of the contact.
5. Click **Save**.


## Add a personal contact from call logs


You can directly add an unknown number from call log to your Personal Contacts.


1. On Linkus Desktop Client, go to **Call Logs**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.

You are redirected to a contact details page, and the number is automatically added to the number list.

- b. In the **Add to** drop-down list, select **Personal Contacts**.

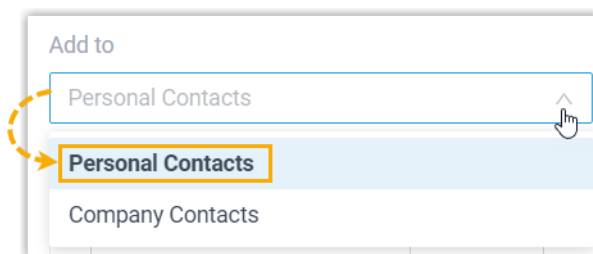

- c. Edit the type of the number, and enter the information of the contact as needed.
    - d. Click **Save**.
4. To add the contact to an existing contact, do as follows:
  - a. Click **Add to Existing Contact**.
  - b. In the pop-up window, click  at the top-left corner, then select **Personal Contacts**.

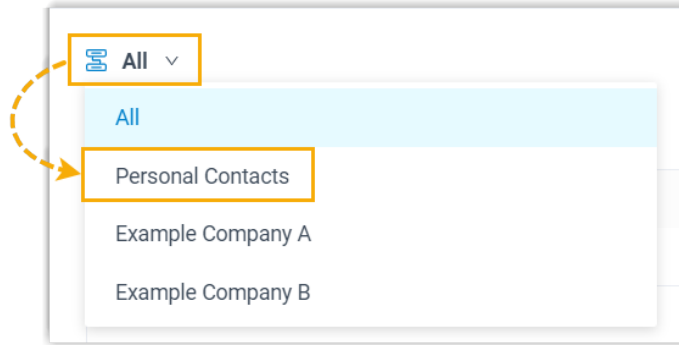

c. Search and select an existing contact, then click **Confirm**.

You are redirected to the contact details page, and the number is automatically added to the number list.

d. Edit the type of the new number, and edit the information of the contact as needed.

e. Click **Save**.


### Add a personal contact from Voicemails list

You can directly add an unknown number from Voicemails list to your Personal Contacts.

1. On Linkus Desktop Client, go to **Voicemails**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.

You are redirected to a contact details page, and the number is automatically added to the number list.

b. In the **Add to** drop-down list, select **Personal Contacts**.

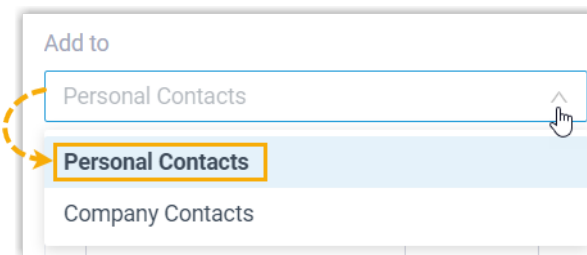


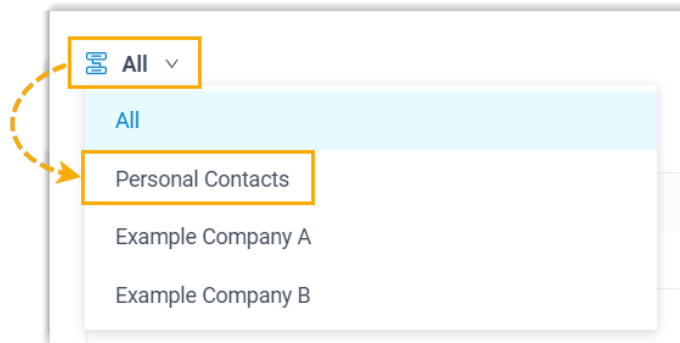
c. Edit the type of the number, and enter the information of the contact as needed.

d. Click **Save**.

4. To add the contact to an existing contact, do as follows:
  - a. Click **Add to Existing Contact**.



- b. In the pop-up window, click  at the top-left corner, then select **Personal Contacts**.



- c. Search and select an existing contact, then click **Confirm**.

You are redirected to the contact details page, and the number is automatically added to the number list.

- d. Edit the type of the new number, and edit the information of the contact as needed.
- e. Click **Save**.


## Add a personal contact from Recordings list

You can directly add an unknown number from Recordings list to your Personal Contacts.


1. On Linkus Desktop Client, go to **Recordings**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.


You are redirected to a contact details page, and the number is automatically added to the number list.

- b. In the **Add to** drop-down list, select **Personal Contacts**.

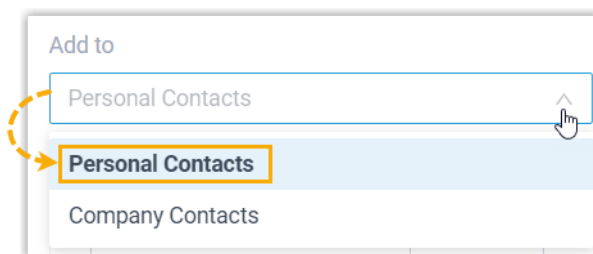

- c. Edit the type of the number, and enter the information of the contact as needed.
      - d. Click **Save**.
4. To add the contact to an existing contact, do as follows:


- a. Click **Add to Existing Contact**.
- b. In the pop-up window, click  at the top-left corner, then select **Personal Contacts**.

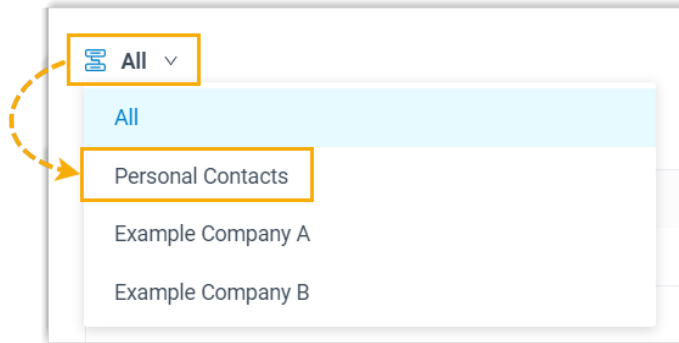


- c. Search and select an existing contact, then click **Confirm**.  
You are redirected to the contact details page, and the number is automatically added to the number list.
- d. Edit the type of the new number, and edit the information of the contact as needed.
- e. Click **Save**.

## Add a personal contact from company contacts

If system administrator has granted you the permission to manage company contacts, you can directly add a company contact to your Personal Contacts.

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Company Contacts** or the phonebook where the company contact is stored.

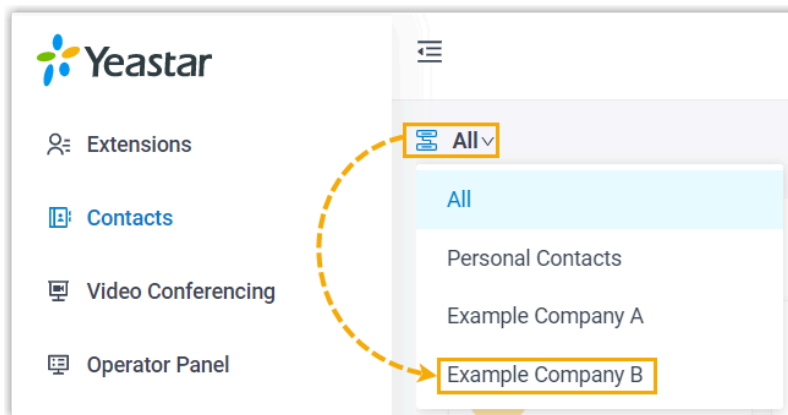

3. On the contact card, click , then click **Add to Personal Contacts**.

The page prompts "Added successfully", which indicates that the company contact is added to your Personal Contacts.

### Related information


[Manage Personal Contacts](#)


[Import and Export Personal Contacts](#)


## Manage Personal Contacts

This topic describes how to edit and delete your personal contacts on Linkus Desktop Client. The changes will be synchronized across your Linkus UC Clients.


### Edit a personal contact


1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

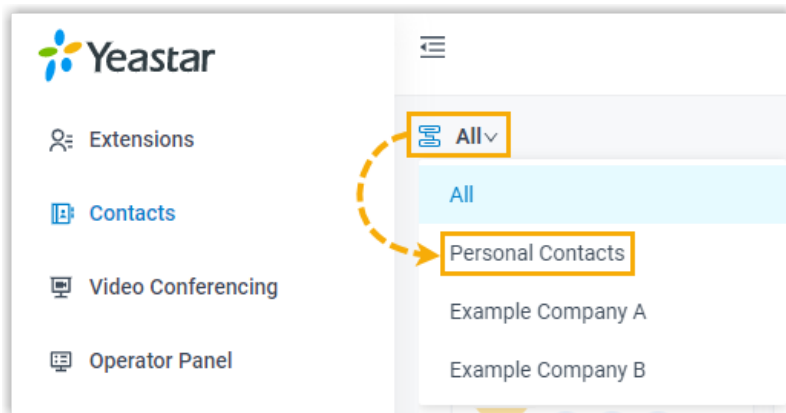

3. On the desired contact card, click .
4. Edit the contact's information as needed, then click **Save**.

### Delete a personal contact

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

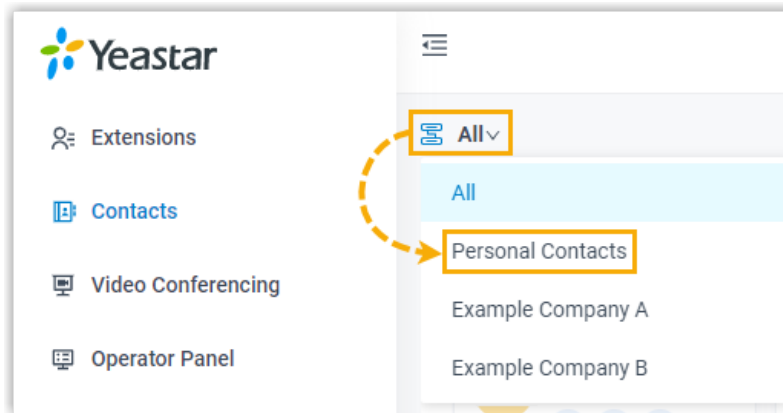


3. On the desired contact card, click **...**, then click **Delete**.
4. In the pop-up window, click **OK**.


## Import and Export Personal Contacts

This topic describes how to import and export personal contacts on Linkus Desktop Client.

### Export personal contacts

You can export all personal contacts to a CSV file, and then make additions, removals, and changes to the file.

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

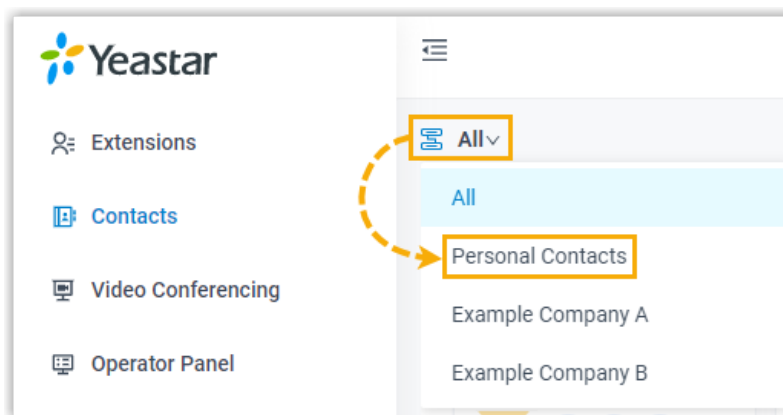

3. On the top of the page, click **Export**.
4. In the pop-up window, save the downloaded file to a desired location.

## Import personal contacts


We recommend that you export personal contacts data to a CSV file first, and use the file as a template to start with. In this way, you can save time and effort.


### Prerequisites

Requirements of an imported file:

- **Format:** UTF-8 .CSV
- **Size:** Less than 300 MB
- **File name:** Less than 127 characters
- **Import parameters:** Ensure that the import parameters meet requirements. For more information, see [Contacts Parameters](#).

### Procedure

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

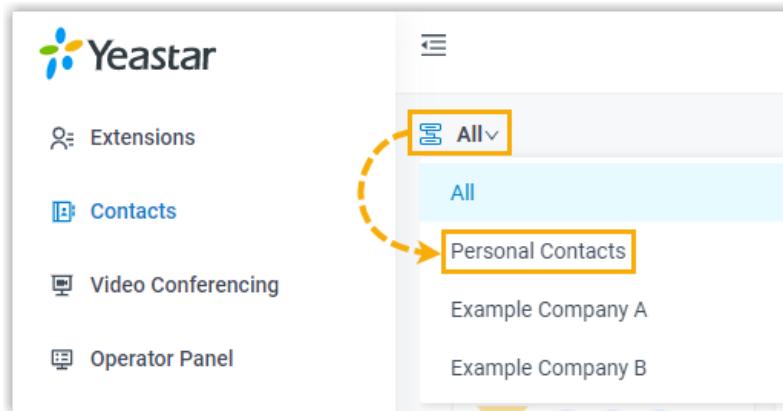

3. On the top of the page, click **Import**.
4. In the pop-up window, click **Browse**, and select your CSV file.
5. Click **Import**.

The contacts in the CSV file will be displayed in **Personal Contacts**.

### Related information

[Import and Export FAQ](#)

# Company Contacts

## Add a Company Contact

This topic describes how to add a company contact. The company contacts you add will be synchronized across your Linkus UC Clients and the server, and be shared with other authorized colleagues.

### Requirements


System administrator has granted you the permission to manage company contacts or specific phonebooks.


### Supported methods

Linkus supports to add a company contact via any of the following methods:

- [Manually add a company contact](#)
- [Add a company contact from call logs](#)
- [Add a company contact from Voicemails list](#)
- [Add a company contact from Recordings list](#)
- [Add a company contact from personal contacts](#)

### Manually add a company contact

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Company Contacts** or the phonebook where you want to add a company contact.

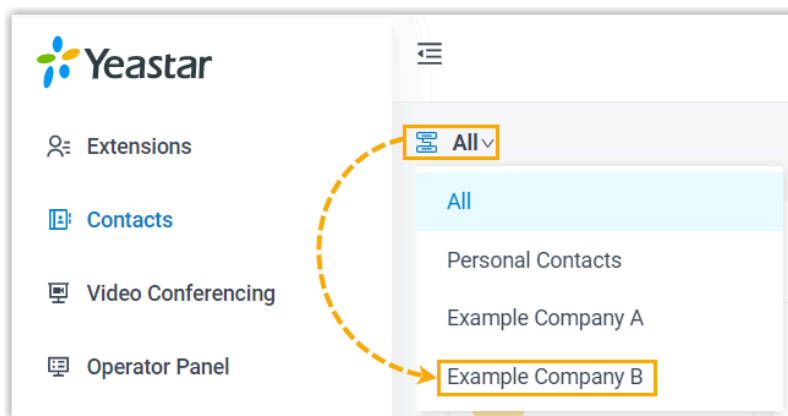

3. Click **Add**.

4. On the contact details page, enter the information of the contact.
5. Click **Save**.

## Add a company contact from call logs


You can directly add an unknown number from call logs to Company Contacts.

1. On Linkus Desktop Client, go to **Call Logs**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.

You are redirected to a contact details page, and the number is automatically added to the number list.

- b. In the **Add to** drop-down list, select **Company Contacts**, then select the specific phonebook(s) where you want to store the contact from the **Phonebook List**.

The image shows two dropdown menus. The first is labeled 'Add to' and has 'Company Contacts' selected. The second is labeled '\* Phonebook List' and is open, showing a list with 'All Company Contacts\_Phonebook' and 'Example Company B' (with a close icon).

- c. Edit the type of the number, and enter the information of the contact as needed.
  - d. Click **Save**.
4. To add the contact to an existing contact, do as follows:
    - a. Click **Add to Existing Contact**.
    - b. In the pop-up window, click  at the top-left corner, then select **Company Contacts** or the phonebook where the existing contact is stored.

The image shows a pop-up window titled 'Add to Company Contacts/Phonebooks'. At the top left, there is a phonebook icon and a dropdown menu with 'All' selected. Below the dropdown is a list of options: 'All', 'Personal Contacts', 'Example Company A', and 'Example Company B'. A dashed orange arrow points from the phonebook icon to the 'Example Company B' option.

- c. Search and select an existing contact, then click **Confirm**.

You are redirected to the contact details page, and the number is automatically added to the number list.

- d. Edit the type of the number, and enter the information of the contact as needed.
- e. Click **Save**.

## Add a company contact from Voicemails list


You can directly add an unknown number from Voicemails list to your Company Contacts.

1. On Linkus Desktop Client, go to **Voicemails**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.

You are redirected to a contact details page, and the number is automatically added to the number list.

- b. In the **Add to** drop-down list, select **Company Contacts**, then select the specific phonebook(s) where you want to store the contact from the **Phonebook List**.

The image shows two dropdown menus. The first is labeled 'Add to' and has 'Company Contacts' selected. The second is labeled '\* Phonebook List' and is open, showing a list with 'All Company Contacts\_Phonebook' selected and 'Example Company B X' below it.

- c. Edit the type of the number, and enter the information of the contact as needed.
  - d. Click **Save**.
4. To add the contact to an existing contact, do as follows:
    - a. Click **Add to Existing Contact**.
    - b. In the pop-up window, click  at the top-left corner, then select **Company Contacts** or the phonebook where the existing contact is stored.

The image shows a pop-up window titled 'Add to Company Contacts/Phonebooks'. At the top left, there is a dropdown menu with a stacked books icon and the text 'All'. Below this is a list of options: 'All', 'Personal Contacts', 'Example Company A', and 'Example Company B'. The 'Example Company B' option is highlighted with a blue background. A dashed orange arrow points from the stacked books icon to the 'Example Company B' option.



- c. Search and select an existing contact, then click **Confirm**.

You are redirected to the contact details page, and the number is automatically added to the number list.

- d. Edit the type of the number, and enter the information of the contact as needed.
- e. Click **Save**.

## Add a company contact from Recordings list


You can directly add an unknown number from Recordings list to Company Contacts.


1. On Linkus Desktop Client, go to **Recordings**.
2. Right click the desired record.
3. To add the contact as a new contact, do as follows:
  - a. Click **Add New Contact**.

You are redirected to a contact details page, and the number is automatically added to the number list.

- b. In the **Add to** drop-down list, select **Company Contacts**, then select the specific phonebook(s) where you want to store the contact from the **Phonebook List**.

The image shows two dropdown menus side-by-side. The first dropdown is labeled 'Add to' and has 'Company Contacts' selected. The second dropdown is labeled '\* Phonebook List' and has 'All Company Contacts\_Phonebook' selected. Below the second dropdown, 'Example Company B' is listed with a close button (X).

- c. Edit the type of the number, and enter the information of the contact as needed.
  - d. Click **Save**.
4. To add the contact to an existing contact, do as follows:
    - a. Click **Add to Existing Contact**.
    - b. In the pop-up window, click  at the top-left corner, then select **Company Contacts** or the phonebook where the existing contact is stored.

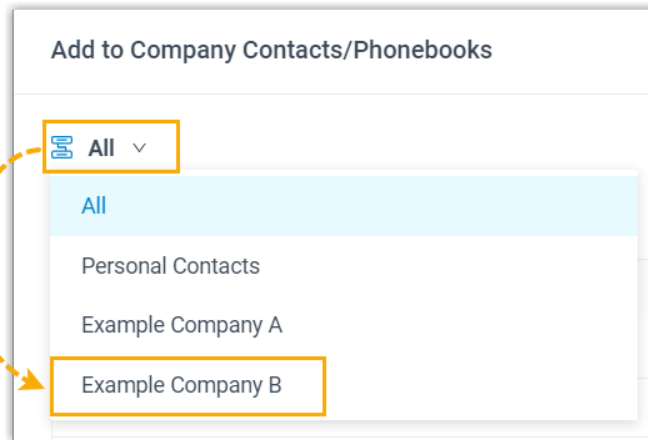


- c. Search and select an existing contact, then click **Confirm**.


You are redirected to the contact details page, and the number is automatically added to the number list.


- d. Edit the type of the number, and enter the information of the contact as needed.  
e. Click **Save**.

## Add a company contact from personal contacts

You can directly add a personal contact to Company Contacts for contact-sharing with your team members.

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Personal Contacts** from the drop-down list.

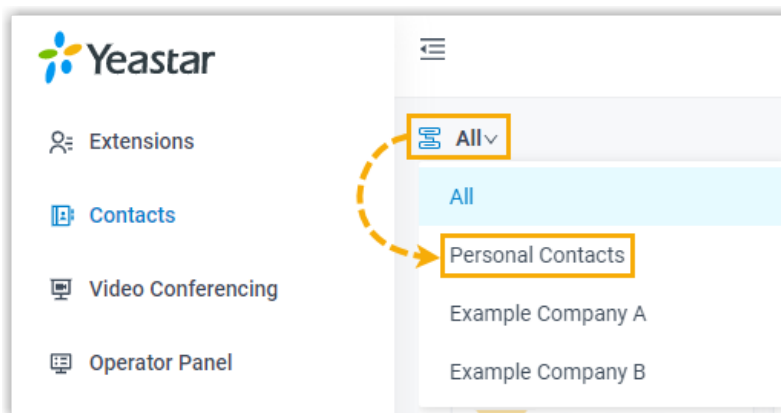

3. On the desired contact card, click , then click **Add to Company Contacts** or **Add to Phonebooks**.

**Note:**

The option varies depending on the server's subscription.

- If you select **Add to Phonebooks**, you need to select the specific phonebook where you want to store the contact in the pop-up window, then click **Confirm**.

The page prompts "Added successfully", which indicates that the personal contact is added as a company contact.

**Related information**

[Manage Company Contacts](#)


## Manage Company Contacts


This topic describes how to edit and delete company contacts on Linkus Desktop Client. The changes will be synchronized across your Linkus UC Clients and the server.

### Requirements

System administrator has granted you the permission to manage company contacts or specific phonebooks.

### Edit a company contact

- On Linkus Desktop Client, go to **Contacts**.
- At the top-left corner, click , then select **Company Contacts** or the phonebook where the company contact is stored.

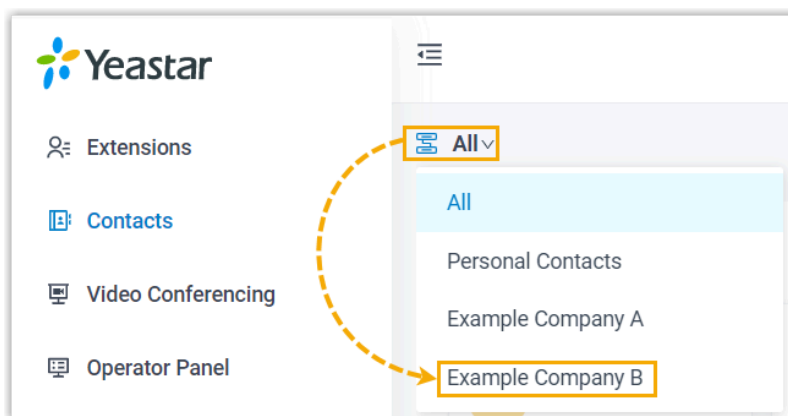

- On the desired contact card, click .


4. Edit the contact's information as needed, then click **Save**.


## Delete a company contact




### Important:

Think twice before you delete a company contact, because when you delete a company contact on Linkus, the contact information will also be deleted on the server.

1. On Linkus Desktop Client, go to **Contacts**.
2. At the top-left corner, click , then select **Company Contacts** or the phonebook where the company contact is stored.

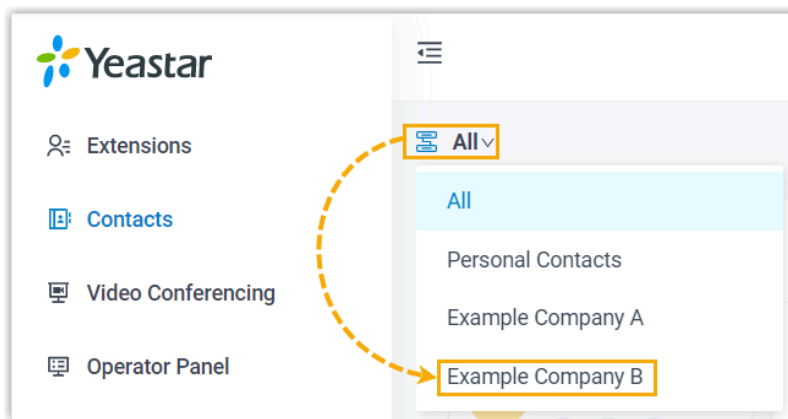

3. On the desired contact card, click , then click **Delete**.
4. In the pop-up window, click **OK**.

## Mark or Remove Favorite Contacts

This topic describes how to mark or remove favorite contacts on Linkus Desktop Client.

### Requirements


Your Linkus version meets the following requirement:

- **Linkus Windows Desktop:** Version 1.4.9 or later
- **Linkus Mac Desktop:** Version 1.4.9 or later


### Mark a favorite contact

You can mark the desired contacts as favorites for quick location and retrieval.


1. On Linkus Desktop Client, click **Contacts**.
2. Find the desired contact, click **...** and select **Add to Favorite Contacts**.

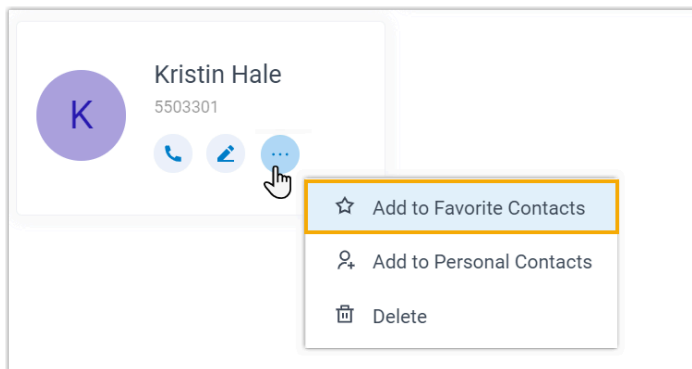


This contact is marked as favorites, which can be found in the **Favorite Contacts** list.

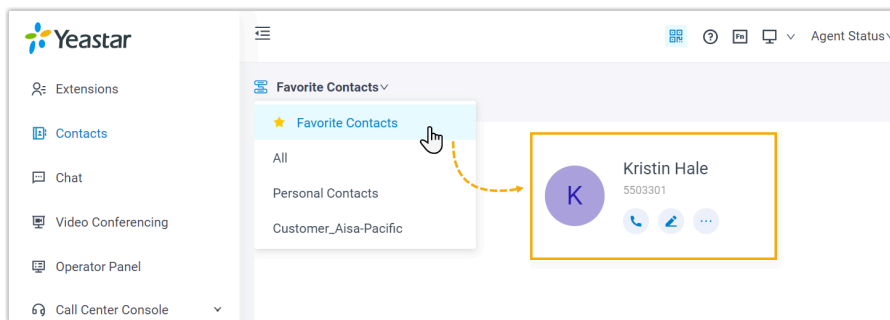


## Remove a favorite contact

1. On Linkus Desktop Client, click **Contacts**.
2. At the top-left corner of workspace, select **Favorite Contacts** from the drop-down list of .

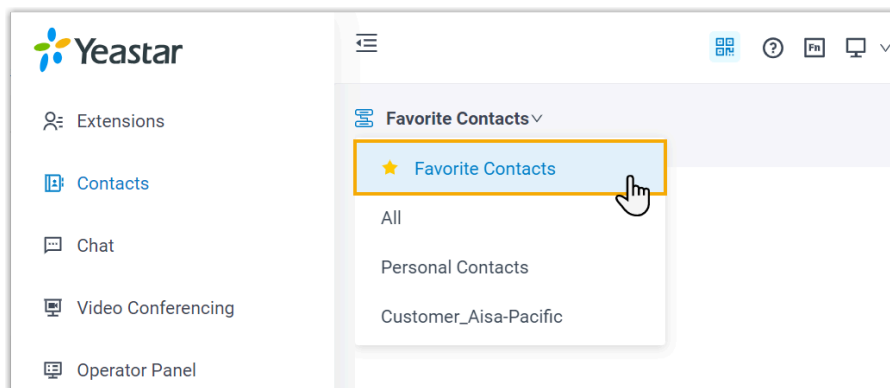

3. Find the desired contact, click **...** and select **Remove from Favorite Contacts**.

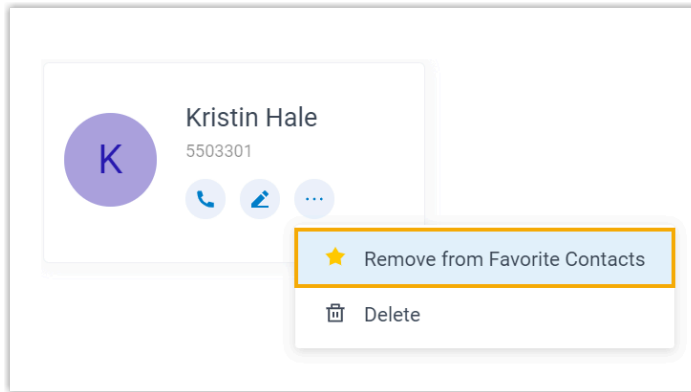

This contact is removed from your **Favorite Contacts** list.


# Chat

## Internal Chat

### Linkus Desktop Client Internal Chat Overview

Linkus Internal Chat (Instant Messaging, IM) feature allows you to start a conversation (either 1:1 or group chat) with colleague, and liven up the conversation with emoji, pictures, and file sharing.

### Preview of Linkus Desktop Client internal chat

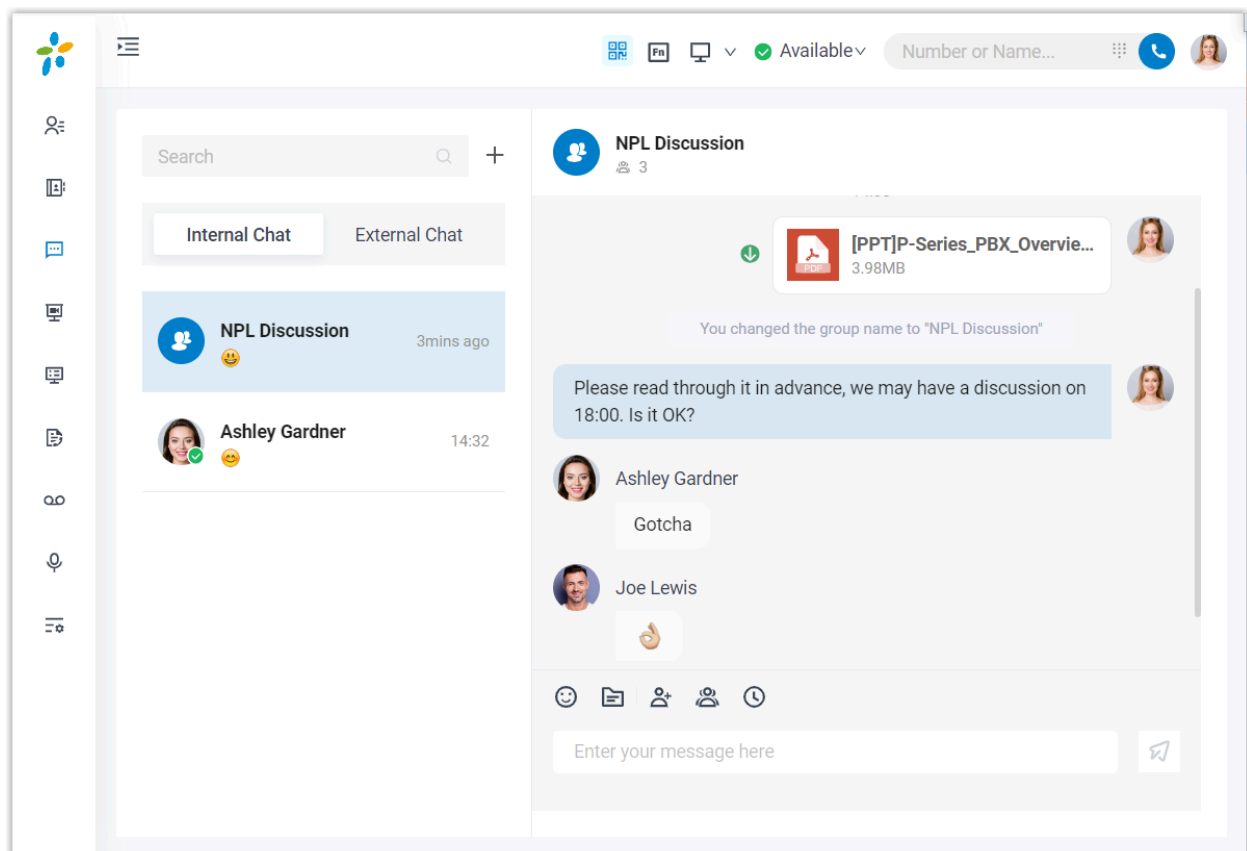

## Requirements

### PBX Server

- **Version:** 84.12.0.32 or later

- **Plan:** Enterprise Plan or Ultimate Plan

## Linkus Desktop Client

- **Version:**
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

## Restrictions

- **Members per group chat:** Max. 200 people
- **Group chat created (per user):** Max. 100 group chats
- **File Sharing:** Max. 100 MB
- **Chat history:** Max. 1 year

## Highlights

- **Private 1:1 or Group Chat:** Collaborate with your colleagues efficiently through a personal chat or a group chat.
- **Customizable Notification Settings:** Enable or disable notifications (pop-up and sound) for new messages.
- **Chat History:** Chat histories are auto-synced across Linkus UC Clients, which means that you can access the same messages and files from Linkus Web Client and Linkus Mobile Client.
- **Flexible Message Type:** Send text messages and emojis; Share files and pictures; Make an audio or video call within a click.

## Start a Chat Session with Colleagues

For cases that do not require immediate attention, you can send instant messages right from Linkus Desktop Client to your colleagues without disturbing their work. This topic describes how to start a one-on-one chat and a group chat.

## Prerequisites


- Contact system administrator to check if PBX server meets the following requirements:
  - **Version:** 84.12.0.32 or later
  - **Plan:** Enterprise Plan or Ultimate Plan




- Make sure that the version of your Linkus Desktop Client meets with the following version requirements:
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

## Procedure

1. Log in to Linkus Desktop Client.
2. On the left navigation bar, click **Chat**, then click the **Internal Chat** tab.
3. To start a chat with a colleague, do as follows:

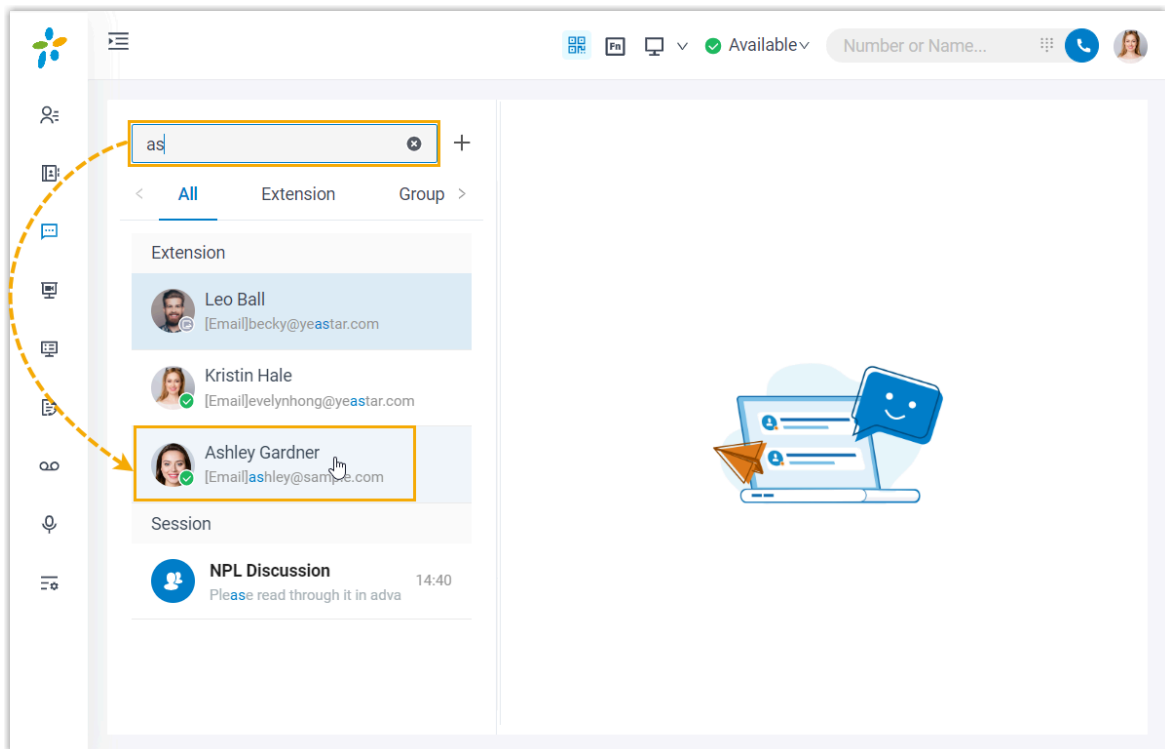

- a. At the left panel, enter a value (name, number, email address or a chat history) in the search bar to find the desired colleague.
  - b. Click the matched colleague.
4. To start a group chat with multiple colleagues, do as follows:
    - a. Click **+** right beside the search bar.

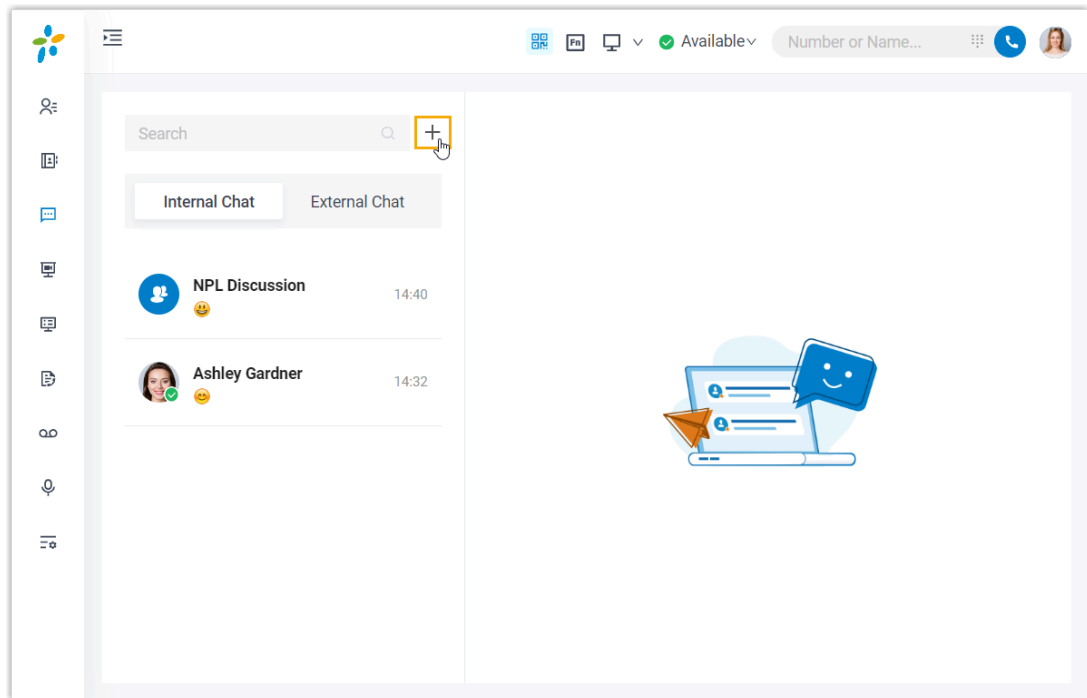

b. In the pop-up window, select desired colleagues, then click **Create**.



**Note:**


Up to 200 members can be in a group chat.

## External Chat

### Linkus Desktop Client External Chat Overview

Linkus External Chat feature allows you to centrally deal with customer queries (from different messaging channels, such as SMS or social media) on Linkus Desktop Client.

## Preview of Linkus Desktop Client external chat

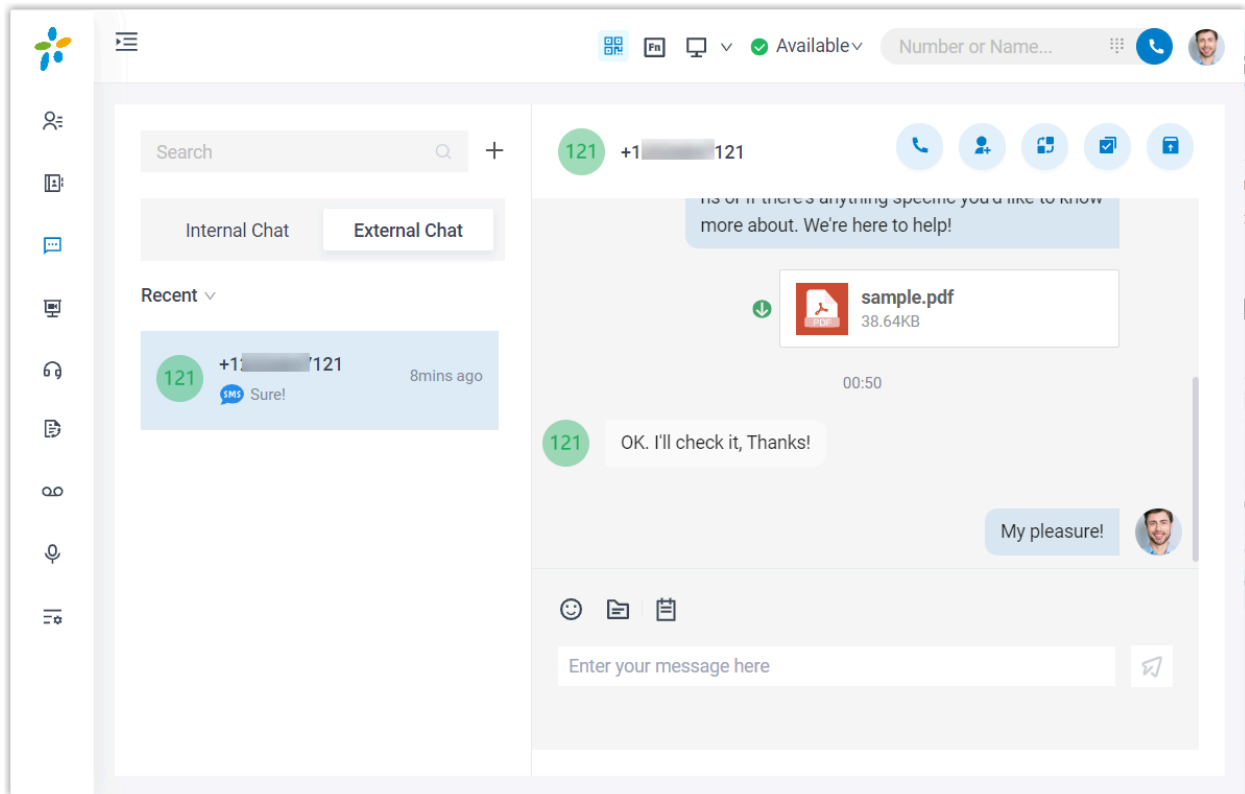

## Requirements

### PBX Server



- **Version:** 84.12.0.32 or later.
- **Plan:** **Enterprise Plan** or **Ultimate Plan**
- **Messaging:** At least one messaging channel is set up on PBX.

### Linkus Desktop Client

- **Version:**
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

## Channel types

The external chats are marked with specific icons to indicate the type of the source channel, as listed below:

- : The message is sent from SMS channel.
- : The message is sent from WhatsApp channel.

## Restrictions

Learn about the restrictions of different messaging channels.

	SMS channel	WhatsApp channel
Chat type	Only support 1:1 conversation	
Session auto closure	Depends on system administrator's configurations.	Automatically close a messaging session that has been inactive for 24 hours.
Messaging mechanism	You can receive and reply to customers' inbound messages, and can initiate a messaging session.	You can receive and reply to customers' inbound messages, but can NOT initiate a messaging session.
File sharing	Max. 100 MB	
File retention period	24 hours	

## Highlights

- **All-in-one message inbox:** Receive and manage all customers' queries across multiple messaging channels centrally in one place.
- **Customer contact using business number:** Contact customers using a business phone number, while keeping your personal number private.
- **Seamless collaboration across colleagues:** Transfer a messaging session to another colleague, the colleague can review the whole chat history and take over the messaging session without hassle.
- **Flexible session management:** Supports management operations including elevating a messaging session to a call, archiving or unarchiving messaging sessions, and more.
- **Customizable Notification Settings:** Enable or disable notifications (pop-up and sound) for new messages.

## Related information

[Manage Customer Queries from External Messaging Channels](#)

## Manage Customer Queries from External Messaging Channels

This topic describes how to manage the messaging sessions of customer queries on Linkus Desktop Client.

### Requirements

#### PBX Server

- **Version:** 84.12.0.32 or later.
- **Plan:** **Enterprise Plan** or **Ultimate Plan**
- **Messaging:** At least one messaging channel is set up on PBX.

#### Linkus Desktop Client

- **Version:**
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

### Procedure

1. On Linkus Desktop Client, click **Chat**, and click the **External Chat** tab.

All the messaging sessions sent from different channels are displayed in the external chat list.

2. Manage the messaging session according to your need.

Scenario	Instruction
Figure 3. <b>Pick up a messaging</b>	If you are an agent of a message queue, when the message queue receives inbound message(s) in a new session, you can see the message(s) and pick up the session from the queue.



Scenario	Instruction
<p><b>session</b></p>	<p>a. At the top of the messaging session, click <b>Pick Up</b>.</p> <p>There is a prompt indicating that you have picked up the session from the message queue; Only you can see the session and respond to messages in the session.</p> 

Figure 4.  
**Transfer a messaging session**

During a session, you can hand off a customer's issue to another colleague or a message queue by transferring the messaging session.

a. At the top-right corner of the messaging session, click .

b. In the pop-up window, select the desired destination and click **OK**.

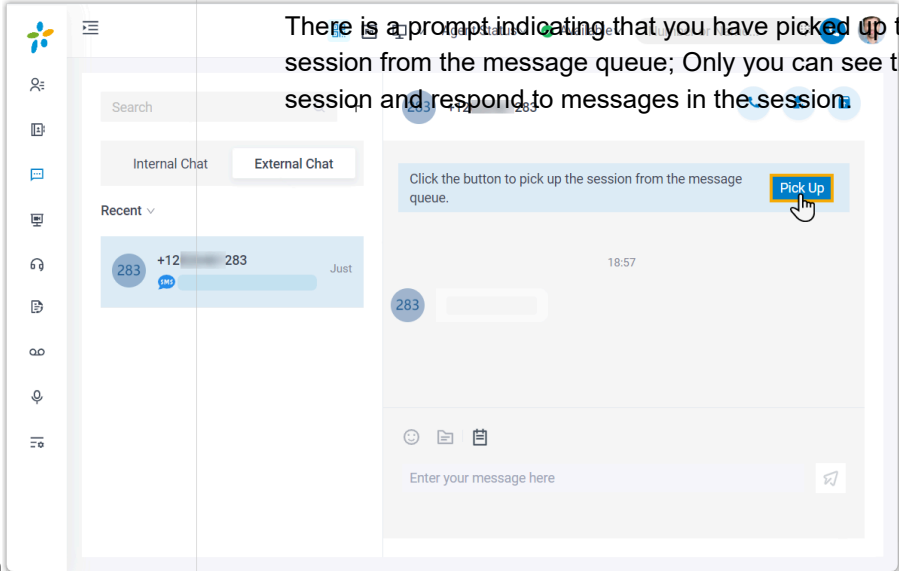




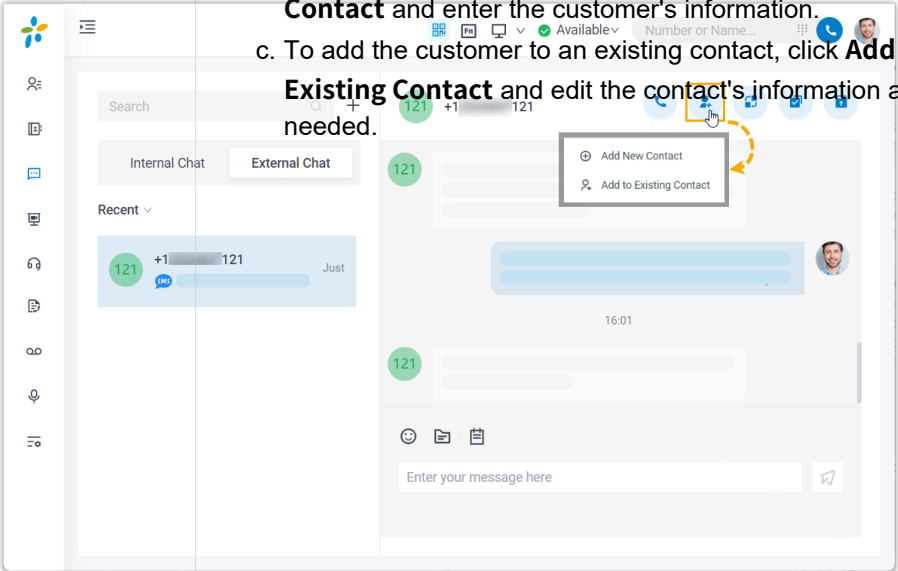

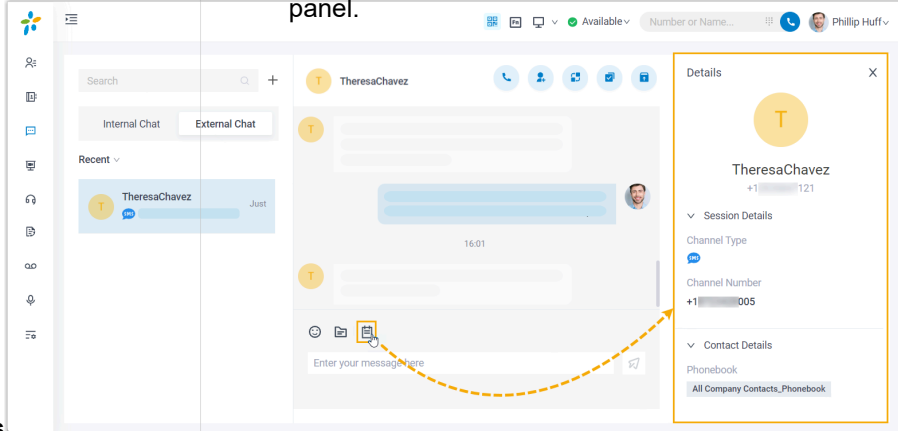




<p><b>session</b></p>	<p>The messaging session is removed from your external chat list, and transferred to the colleague / message queue with whole chat history.</p> 
-----------------------	--

Figure 5.  
**Initiate a voice call from a messaging session**



You can initiate a voice call right from the messaging session to resolve a customer's issue if necessary.

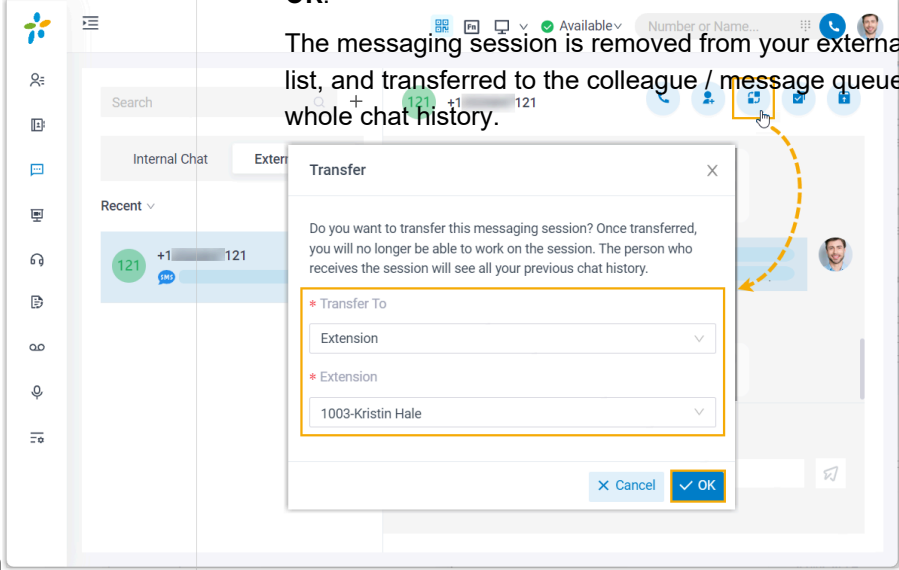 **Note:**

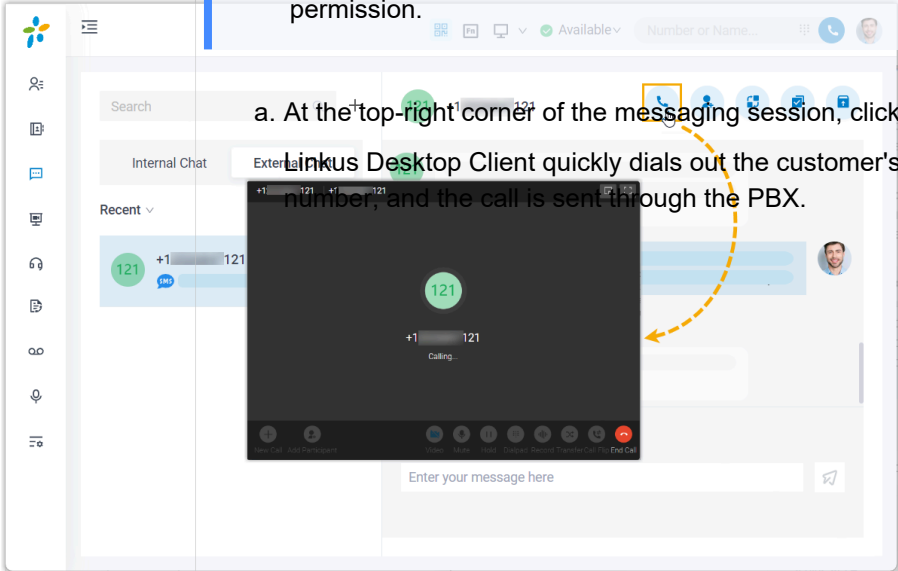Scenario	Instruction
<p><b>g</b> <b>sessio</b></p>	<p>This operation requires the permission to make outbound calls. Contact system administrator to check if you have the permission.</p> <p>a. At the top-right corner of the messaging session, click . Linkus Desktop Client quickly dials out the customer's number, and the call is sent through the PBX.</p> 
<p><b>n</b></p> <p><b>Figure 6. Add a customer to Contact</b></p>	<p>You can add a customer to Contacts right from the messaging session.</p> <p>a. At the top-right corner of the messaging session, click .</p> <p>b. To add the customer as a new contact, click <b>Add New Contact</b> and enter the customer's information.</p> <p>c. To add the customer to an existing contact, click <b>Add to Existing Contact</b> and edit the contact's information as needed.</p> 
<p><b>S</b></p> <p><b>Figure 7. View messaging session</b></p>	<p>You can check the detailed information of a messaging session, including the message source channel, channel number, etc.</p> <p>a. At the bottom-left of the messaging session, click .</p>

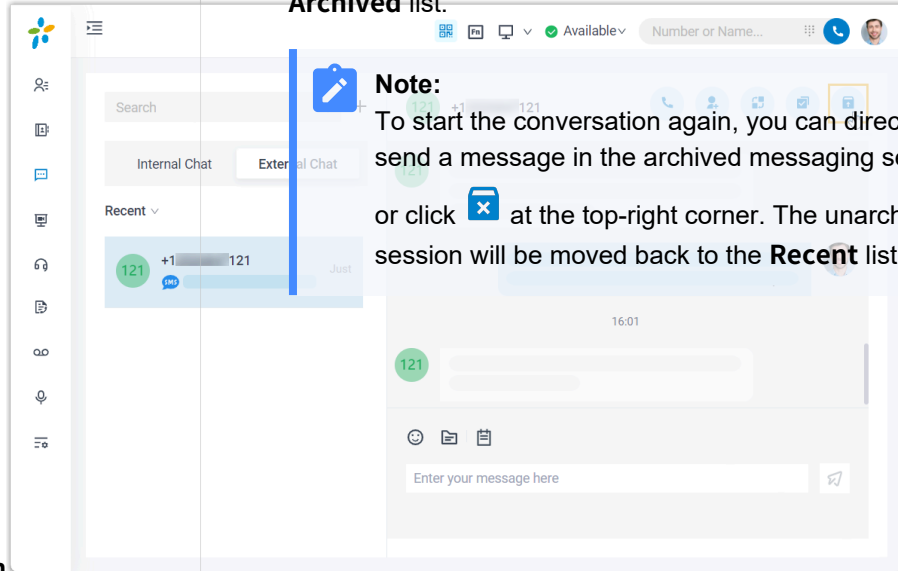Scenario	Instruction
<p><b>detail</b></p>	<p>The details of the messaging session is display at the right panel.</p> 
<p><b>Figure 8. Archive a messaging session</b></p>	<p>You can archive a messaging session if there is no response from the customer or you wish to refer back to the session later.</p> <ol style="list-style-type: none"> <li>At the top-right corner of a messaging session, click . The messaging session is moved from <b>Recent</b> list to the <b>Archived</b> list.</li> </ol> <p><b>Note:</b> To start the conversation again, you can directly send a message in the archived messaging session, or click  at the top-right corner. The unarchived session will be moved back to the <b>Recent</b> list.</p> 
<p><b>Figure 9. End a messaging session</b></p>	<p>When you're done helping a customer, you can end the messaging session.</p> <ol style="list-style-type: none"> <li>At the top-right corner of a messaging session, click .</li> </ol>

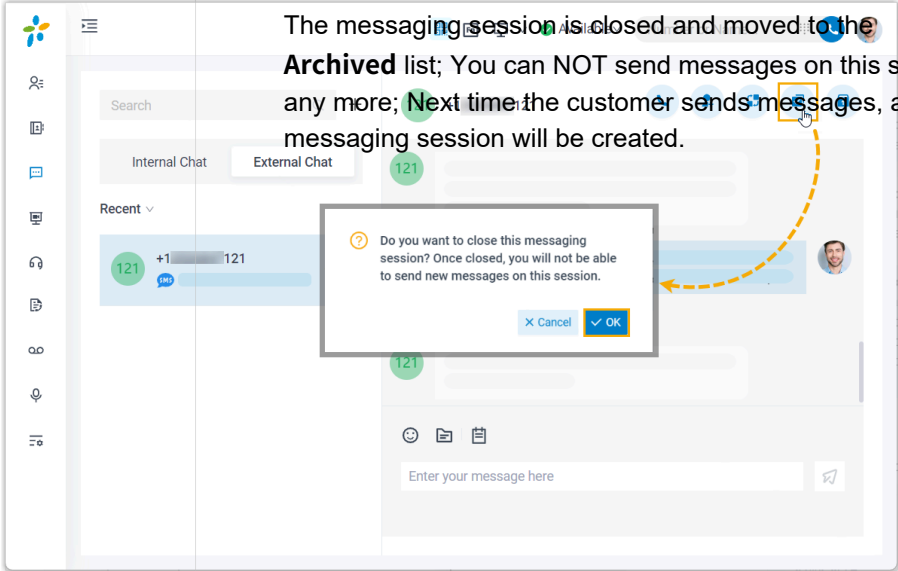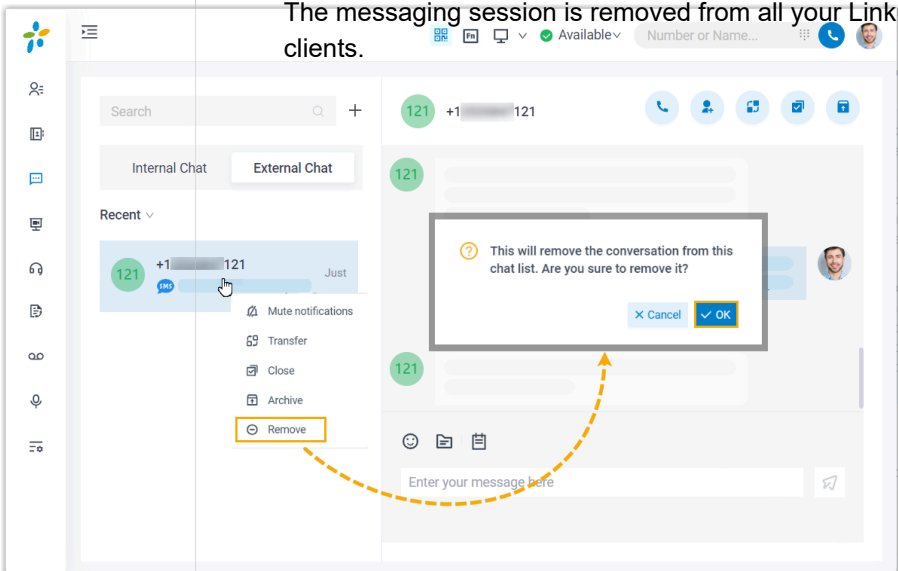

Scenario	Instruction
<p><b>session</b></p>	<p>b. In the pop-up window, click <b>OK</b>.</p> <p>The messaging session is closed and moved to the <b>Archived</b> list; You can NOT send messages on this session any more; Next time the customer sends messages, a new messaging session will be created.</p> 
<p><b>Remove a messaging session</b></p>	<p>To remove a messaging session, do as follows:</p> <ol style="list-style-type: none"> <li>In the external chat list, right click the messaging session that you want to remove.</li> <li>Click <b>Remove</b>.</li> <li>In the pop-up window, click <b>OK</b>.</li> </ol> <p>The messaging session is removed from all your Linkus clients.</p> 

**Related information**



[Configure Chat Notifications](#)


# Configure Chat Notifications

This topic describes how to mute or unmute notifications for a specific chat, and how to configure new message notifications (pop-up and sound) for all Linkus chats.

## Mute or unmute notifications for a chat (specific setting)

1. On Linkus Desktop Client, click **Chat**, then click the **Internal Chat** or **External Chat** tab.
2. Mute or unmute notifications for the desired chat as needed.

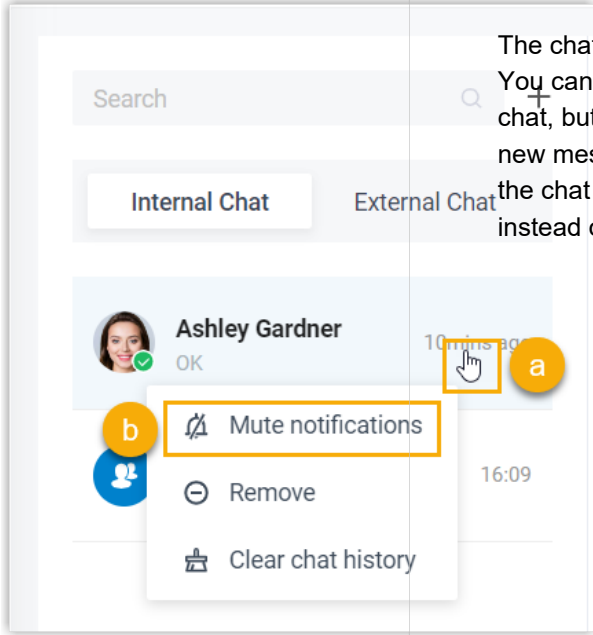
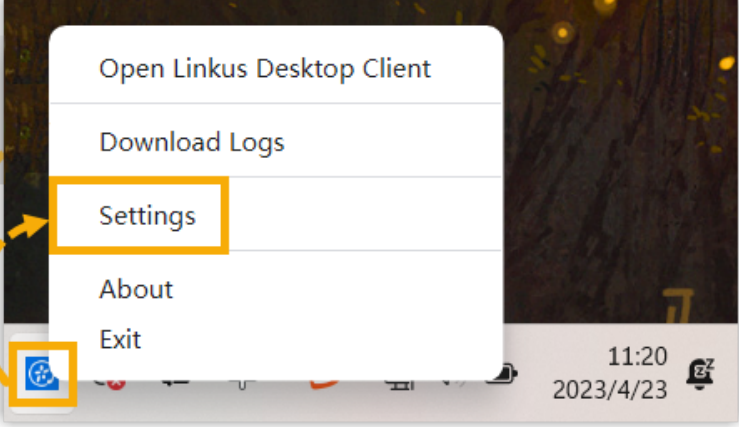
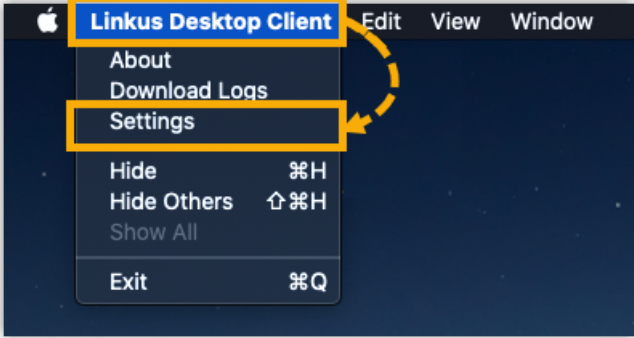
Operation	Instruction
<p>Figure 11. <b>Mute notifications for a chat</b></p> 	<ol style="list-style-type: none"> <li>a. Right click on the chat.</li> <li>b. Click <b>Mute notifications</b>.</li> </ol> <p>The chat is muted and marked with ; You can still receive messages in the muted chat, but will NOT be notified upon receiving new messages. If there are new messages, the chat will be marked with a red dot instead of the number of unread messages.</p>

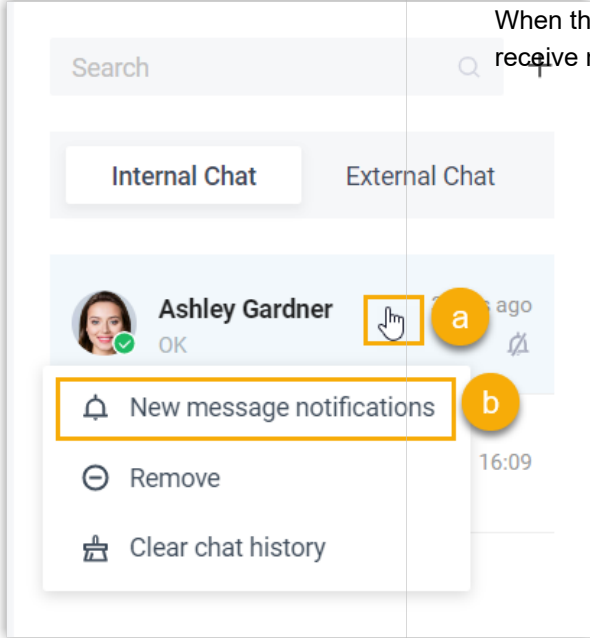Operation	Instruction
<p>Figure 12. <b>Unmute notifications for a chat</b></p> 	<p>a. Right click on the chat.  b. Click <b>New message notifications</b>.</p> <p>When there are new messages, you will receive new message notifications.</p>


### Configure new message notifications (pop-up and sound) for all chats (global settings)

By default, Linkus Desktop Client plays a sound and displays a pop-up when a new message arrives. You can decide whether to enable the notification or not, and the settings will be applied to both Linkus internal chats and external chats.


1. Access the **Settings** menu of Linkus Desktop Client based on your operating system.

Operating System	Instruction
Windows	<p>On the system tray, right click  &gt; <b>Settings</b></p> 
macOS	<p>On the App menu, click <b>Linkus Desktop Client</b> &gt; <b>Settings</b>.</p> 

2. In the **Notifications** section, change the chat notification settings as needed.

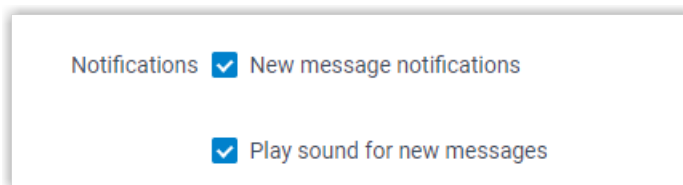

- **New message notifications:** If enabled, upon receiving a new message, you will see a pop-up notification displayed at the bottom-right corner of your desktop.

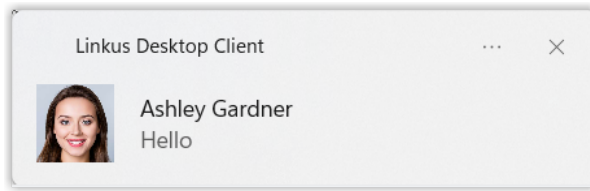

- **Play sound for new messages:** If enabled, upon receiving a new message, Linkus Desktop Client will play a sound to notify you.

# CTI

## Linkus Desktop Client CTI Overview

Linkus Desktop Client can be used in either softphone mode or CTI mode. This topic describes what is softphone mode and CTI mode, what call operations you can do in each mode, and compatible IP phones.

### Softphone mode

A softphone is a software-based phone that is equivalent to a traditional deskphone, which allows you to make and receive calls over the Internet via a computer. A softphone not only has all the features of a deskphone, but also has additional features typical for online messaging, such as chat, video call, extension presence, etc.

If you don't have a deskphone in the office, you can set Linkus Desktop Client to softphone mode. In this way, you can perform the following operations to manage phone calls on your computer:

- Make/End a call
- Make a second call
- Answer/Reject a call
- Mute/Unmute a call
- Transfer a call (attended transfer and blind transfer)
- Record a call
- Hold/Resume a call
- Swap hold

### CTI mode

Computer Telephony Integration (CTI) connects a computer with a telephone system, which allows you to control a phone from your computer.

If you prefer a deskphone for communication, you can set Linkus Desktop Client to CTI mode. In this way, Linkus Desktop Client acts as a visual control panel on which you can perform the supported call operations, whereas calls are made and received from the connected phone.

You can control IP phones via Linkus Desktop Client CTI. Supported operations to manage calls via CTI vary from phone models. Refer to the following table for details.

**Note:**

- For CTI-compatible phones, see [Compatible Yealink IP phones](#), [Compatible Fanvil IP phones](#), and [Compatible Snom IP phones](#).
- Video call is not supported under CTI mode.

Operations	Compatible Yealink / Fanvil / Snom IP phones	Other IP phones
Make/End a call	√	√
Make a second call	√	×
Answer a call	√	×
Reject a call	√	√
Hold/Resume a call	√	√
Mute/Unmute a call	×	×
Blind transfer a call	√	√
Attended transfer a call	√	×
Record a call	√	√
Swap hold	√	×

**Compatible Yealink IP phones**

Phone Model	Firmware Version
SIP-T21P_E2	52.84.0.125 or later
SIP-T21_E2	52.84.0.125 or later
SIP-T23P	44.84.0.125 or later
SIP-T23G	44.84.0.125 or later
SIP-T27G	69.85.0.5 or later
SIP-T29G	46.83.0.120 or later
SIP-T30P	124.85.0.15 or later
SIP-T31	124.85.0.15 or later
SIP-T31P	124.85.0.15 or later
SIP-T31G	124.85.0.15 or later
SIP-T33P	124.85.0.15 or later

Phone Model	Firmware Version
SIP-T33G	124.85.0.15 or later
SIP-T40P	54.84.0.125 or later
SIP-T40G	76.84.0.125 or later
SIP-T41P	36.83.0.120 or later
SIP-T42G	29.83.0.120 or later
SIP-T46G	28.83.0.120 or later
SIP-T48G	35.83.0.120 or later
SIP-T41S	66.85.0.5 or later
SIP-T42S	66.85.0.5 or later
SIP-T46S	66.85.0.5 or later
SIP-T48S	66.85.0.5 or later
SIP-T41U	108.85.0.39 or later
SIP-T42U	108.85.0.39 or later
SIP-T43U	108.85.0.39 or later
SIP-T46U	108.85.0.39 or later
SIP-T48U	108.85.0.39 or later
SIP-T52S	70.84.0.70 or later
SIP-T54S	70.84.0.70 or later
SIP-T53	96.85.0.5 or later
SIP-T53W	96.85.0.5 or later
SIP-T54W	96.85.0.5 or later
SIP-T57W	96.85.0.5 or later
SIP-T56A	58.83.0.15 or later
SIP-T58	58.85.0.5 or later
SIP-T58W	150.86.0.5 or later
SIP-T58W	150.86.0.5 or later
VP59	91.85.0.5 or later



## Compatible Fanvil IP phones

Phone Model	Firmware Version
X1S/X1SP	2.2.12 or later
X1SG	2.2.12 or later
X3SG	2.2.12 or later
X3U	2.2.12 or later
X2/X2P	2.14.0.7386 or later
X2C/X2CP	2.14.0.7386 or later
X3S/X3SP/X3G	2.14.0.7386 or later
X4/X4G	2.14.0.7386 or later
X4U	2.2.11 or later
X4U-V2	2.12.1 or later
X5U	2.2.11 or later
X5U-V2	2.12.1 or later
X5S	2.2.1 or later
X6	2.2.1 or later
X6U	2.2.11 or later
X6U-V2	2.12.1 or later
X7	2.2.11 or later
X7C	2.2.11 or later
X7A	2.2.0.229 or later
i56A	2.8.13 or later
A32	2.6.0.408 or later
A32i	2.6.0.408 or later
X210	2.2.11 or later
X210i	2.2.11 or later
X7-V2	2.12.1.3 or later
X7C-V2	2.12.1.3 or later
X210-V2	2.12.1.3 or later
X210i-V2	2.12.1.3 or later
X3S/X3SP Lite	2.4.5 or later

Phone Model	Firmware Version
X3S/X3SP Pro	2.4.5 or later
X3SW	2.4.5 or later
X3SG Lite	2.4.5 or later
X3SG Pro	2.4.5 or later
X3U Pro	2.4.5 or later
V62	2.4.10 or later
V64	2.4.10 or later
V65	2.12.2.4 or later
V67	2.6.0 or later

### Compatible Snom IP phones

Phone Model	Firmware Version
D120	10.1.54.13 or later
D140	10.1.148.1 or later
D150	10.1.148.1 or later
D315	10.1.73.16 or later
D335	10.1.73.16 or later
D385	10.1.73.16 or later
D713	10.1.73.16 or later
D717	10.1.73.16 or later
D735	10.1.73.16 or later
D785	10.1.73.16 or later
D862	10.1.137.15 or later
D865	10.1.137.15 or later

## Control a Yealink IP Phone by Linkus Desktop Client

By enabling CTI mode on Linkus Desktop Client, a Yealink IP phone with your extension registered can be connected to your Linkus Desktop Client. In this way, Linkus Desktop Client acts as a visual control panel where you can manage phone calls, while calls are made and received using the Yealink IP phone.

## Applications

This topic is applied to [the Yealink IP phones that are compatible with Linkus Desktop Client CTI](#).

**Tip:**

For incompatible IP phones, refer to [Control an Incompatible IP phone by Linkus Desktop Client](#) for instructions on phone control.

## Requirements

### PBX server

The **uaCSTA** feature is enabled (Path: **PBX Settings > SIP Settings > Advanced > Other Options > Enable uaCSTA Connection**).

### IP phone

The extension registered on the IP phone is the same as that of Linkus Desktop Client.

**Note:**

Register only one account on the IP phone, or CTI feature may not work.

## Step 1. Set the IP phone to be controllable


**Note:**

If system administrator has assigned your extension to the IP phone via Auto Provisioning, your IP phone is ready for being controlled. In this case, you can directly [enable CTI mode on Linkus Desktop Client](#).

If system administrator has registered your extension to the IP phone manually, you need to set the IP phone to be controllable as follows.

The following instructions take Yealink T56A as an example to show how to enable the CS-TA control function.


1. Log in to the phone web interface.
2. Go to **Features > Remote Control**.
3. On the **Remote Control** page, turn on the option **CSTA Control**.

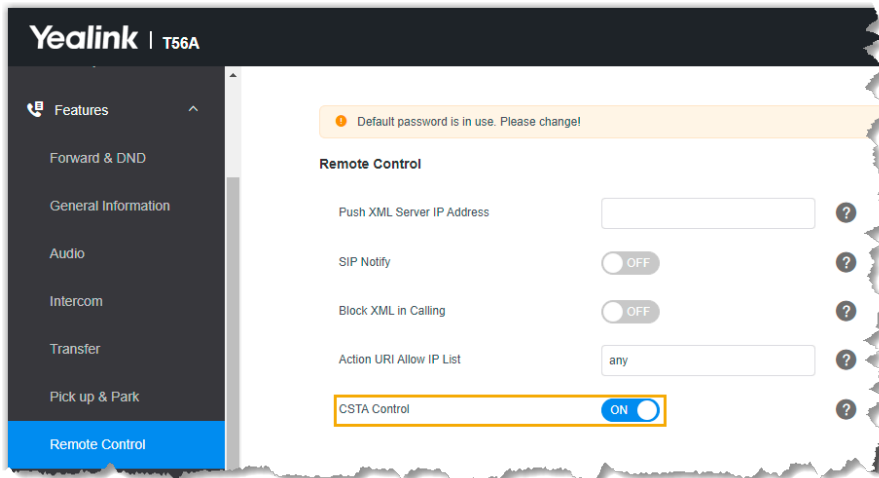


4. Click **Confirm**.
5. In the pop-up dialog box, click **OK** to reboot the phone.

## Step 2. Enable CTI mode on Linkus Desktop Client

Change Linkus Desktop Client to CTI mode, so that you can use Linkus Desktop Client to manage phone calls on your IP phone.

1. Log in to Linkus Desktop Client.
2. At the top-right corner, click , then select the connected Yealink IP phone from the drop-down list.

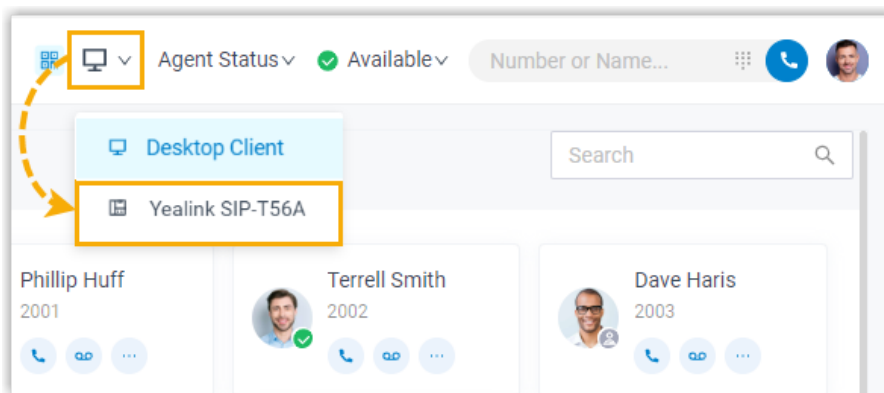

## Result

You can do the following operations on the connected Yealink IP phone from Linkus Desktop Client:

- Make/End a call

- Make a second call
- Answer/Reject a call
- Record a call
- Transfer a call (attended transfer and blind transfer)
- Hold/Resume a call
- Swap hold

## Control a Fanvil IP Phone by Linkus Desktop Client

By enabling CTI mode on Linkus Desktop Client, a Fanvil IP phone with your extension registered can be connected to your Linkus Desktop Client. In this way, Linkus Desktop Client acts as a visual control panel where you can manage phone calls, while calls are made and received using the Fanvil IP phone.

### Applications

This topic is applied to [the Fanvil IP phones that are compatible with Linkus Desktop Client CTI](#).



**Tip:**

For incompatible IP phones, refer to [Control an Incompatible IP phone by Linkus Desktop Client](#) for instructions on phone control.

### Requirements

#### PBX server

The **uaCSTA** feature is enabled (Path: **PBX Settings > SIP Settings > Advanced > Other Options > Enable uaCSTA Connection**).

#### IP phone

The extension registered on the IP phone is the same as that of Linkus Desktop Client.



**Note:**

Register only one account on the IP phone, or CTI feature may not work.

## Step 1. Set the IP phone to be controllable



### Note:

If system administrator has assigned your extension to the IP phone via Auto Provisioning, your IP phone is ready for being controlled. In this case, you can directly [enable CTI mode on Linkus Desktop Client](#).


If system administrator has registered your extension to the IP phone manually, you need to set the IP phone to be controllable as follows.


The following instructions take Fanvil X5S as an example to show how to enable the uaCSTA function and configure a uaCSTA number.

1. Log in to the phone web interface, go to **Line > SIP**.
2. In the **Line** drop-down list, select your extension.
3. Expand the **Advanced Settings** menu, enter your extension number in the **uaCSTA Number** field.
4. Expand the **SIP Global Settings** menu, select the checkbox of **Enable uaCSTA**.
5. Click **Apply**.

## Step 2. Enable CTI mode on Linkus Desktop Client

Change Linkus Desktop Client to CTI mode, so that you can use Linkus Desktop Client to manage phone calls on your IP phone.

1. Log in to Linkus Desktop Client.
2. At the top-right corner, click , then select the connected Fanvil IP phone from the drop-down list.

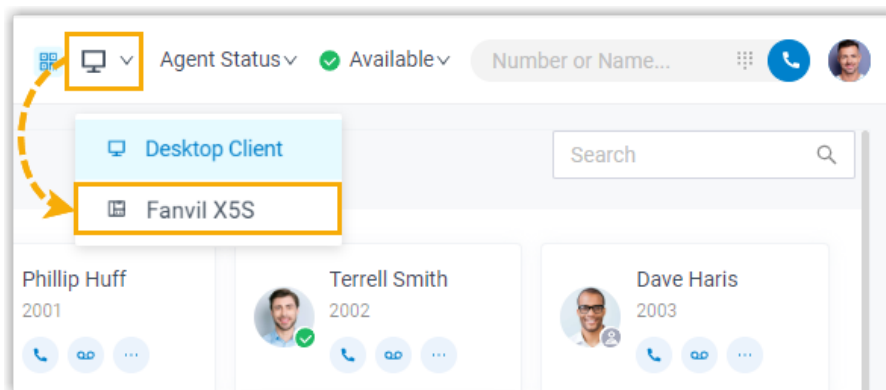

## Result

You can do the following operations on the connected Fanvil IP phone from Linkus Desktop Client:

- Make/End a call
- Make a second call
- Answer/Reject a call
- Record a call
- Transfer a call (attended transfer and blind transfer)
- Hold/Resume a call
- Swap hold

## Control a Snom IP Phone by Linkus Desktop Client

By enabling CTI mode on Linkus Desktop Client, a Snom IP phone with your extension registered can be connected to your Linkus Desktop Client. In this way, Linkus Desktop Client acts as a visual control panel where you can manage phone calls, while calls are made and received using the Snom IP phone.

## Applications

This topic is applied to [the Snom IP phones that are compatible with Linkus Desktop Client CTI](#).



### Tip:

For incompatible IP phones, refer to [Control an Incompatible IP phone by Linkus Desktop Client](#) for instructions on phone control.

## Requirements

### PBX server

Contact system administrator to make sure the following requirements are met on PBX server:

- The version of PBX server is 84.13.0.25 or later.
- The **uaCSTA** feature is enabled (Path: **PBX Settings > SIP Settings > Advanced > Other Options > Enable uaCSTA Connection**).

## IP phone

The extension registered on the IP phone is the same as that of Linkus Desktop Client.



### Note:

Register only one account on the IP phone, or CTI feature may not work.

## Step 1. Set the IP phone to be controllable



### Note:

If system administrator has assigned your extension to the IP phone via Auto Provisioning, your IP phone is ready for being controlled. In this case, you can directly [enable CTI mode on Linkus Desktop Client](#).

If system administrator has registered your extension to the IP phone manually, you need to set the IP phone to be controllable as follows.

The following instructions take Snom D735 as an example to show how to enable CSTA control function.

1. Log in to the phone web interface, go to **Setup > Advanced > QoS/Security**.
2. In the **Security** section, enable the **Allow CSTA Control**.

The screenshot shows the web interface of an IP phone, specifically the 'QoS/Security' configuration page. The left sidebar contains a navigation menu with categories like 'Operation', 'Setup', and 'Advanced'. The main content area has tabs for 'Network', 'Behavior', 'Audio', 'SIP/RTP', 'QoS/Security', and 'Update'. Under the 'QoS/Security' tab, there are sections for 'Quality of Service', 'VLAN', 'PC Port', 'IEEE 802.1X Authentication', and 'Security'. The 'Security' section contains several options with radio buttons and a question mark icon. The 'Allow CSTA Control' option is highlighted with a yellow box, and its radio button is currently selected to 'on'.


Section	Option	Value	Help
Quality of Service	RTP Type of Service (TOS/Diffserv)	160	?
	SIP Type of Service (TOS/Diffserv)	160	?
VLAN	VLAN Id (1-4094)		?
	VLAN Priority (0-7)		?
	Un-/Tag VLAN Traffic on Specific Switch Ports	<input type="radio"/> on <input checked="" type="radio"/> off	?
PC Port	VLAN Id (1-4094)		?
	VLAN Priority (0-7)		?
IEEE 802.1X Authentication:		Off	?
Security	Ignore Security Advises	<input checked="" type="radio"/> on <input type="radio"/> off	?
	Use Hidden Tags	<input type="radio"/> on <input checked="" type="radio"/> off	?
Security	Restrict URI Queries	<input checked="" type="radio"/> on <input type="radio"/> off	?
	Allow CSTA Control	<input checked="" type="radio"/> on <input type="radio"/> off	?
	Empty Client Cert	<input type="radio"/> on <input checked="" type="radio"/> off	?




3. At the bottom of the page, click **Apply**.

## Step 2. Enable CTI mode on Linkus Desktop Client

Change Linkus Desktop Client to CTI mode, so that you can use Linkus Desktop Client to manage phone calls on your IP phone.

1. Log in to Linkus Desktop Client.
2. At the top-right corner, click , then select the connected Snom IP phone from the drop-down list.

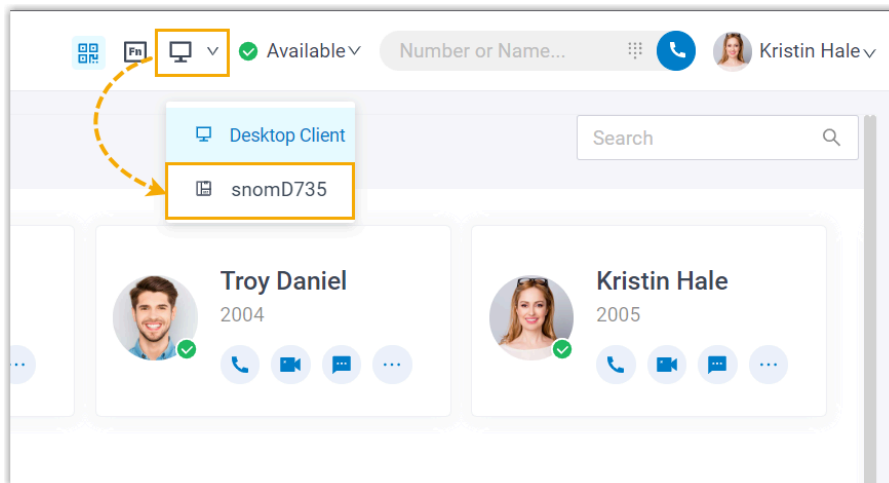

## Result

You can do the following operations on the connected Snom IP phone from Linkus Desktop Client:

- Make/End a call
- Make a second call
- Answer/Reject a call
- Record a call
- Transfer a call (attended transfer and blind transfer)
- Hold/Resume a call
- Swap hold

# Control an Incompatible IP phone by Linkus Desktop Client


By enabling CTI mode on Linkus Desktop Client, an IP phone with your extension registered can be connected to your Linkus Desktop Client. In this way, Linkus Desktop Client acts as a visual control panel whereas calls are made and received using the IP phone.


## Applications

This topic is applied to the IP phones that fall out of the range of CTI-compatible devices.

For CTI-compatible phones, see [Compatible Yealink IP phones](#), [Compatible Fanvil IP phones](#), and [Compatible Snom IP phones](#).

## Procedure

1. Check if the extension registered on the IP phone is the same as that of Linkus Desktop Client.
2. Change Linkus Desktop Client to CTI mode.
  - a. Log in to Linkus Desktop Client.
  - b. At the top-right corner, click , then select the connected IP phone from the drop-down list.

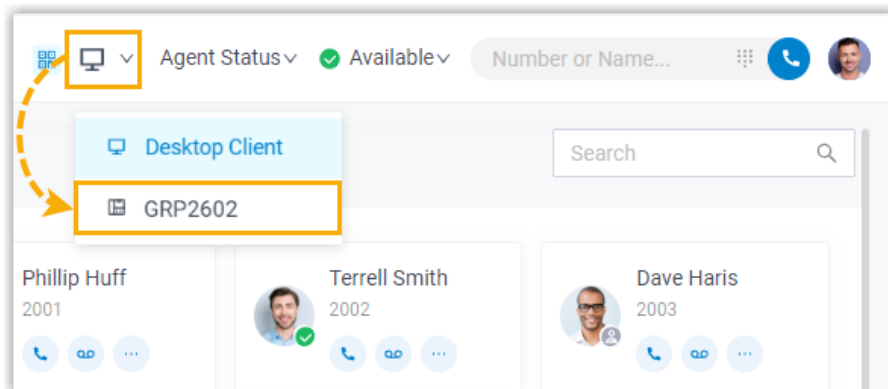

## Result

You can do the following operations on the connected IP phone from Linkus Desktop Client:

- Make/End a call
- Reject a call
- Hold/Resume a call

- Blind transfer a call
- Record a call

# Hotkeys

## Set up Hotkeys

Hotkeys (Keyboard Shortcuts) are combinations of keystrokes that allow you to quickly perform specific operations without using the mouse. This topic introduces the supported shortcut operations, and describes how to enable hotkeys for the operations in Linkus Desktop Client.

### Requirements

- **PBX Server:** Version 84.12.0.32 or later.
- **Linkus Desktop Client:**
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

### Supported shortcut operations and default hotkeys


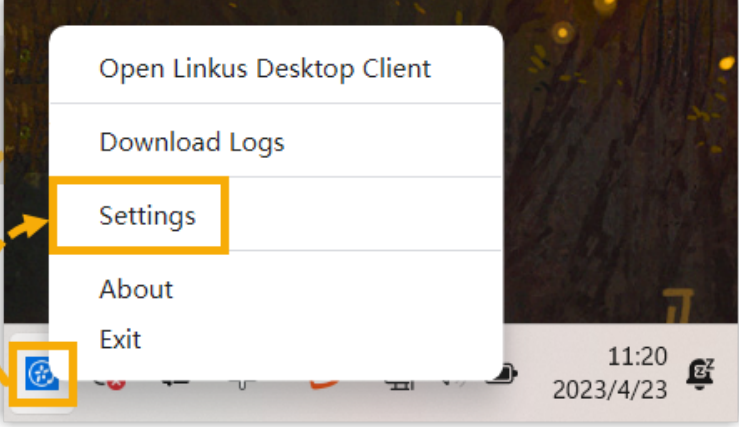
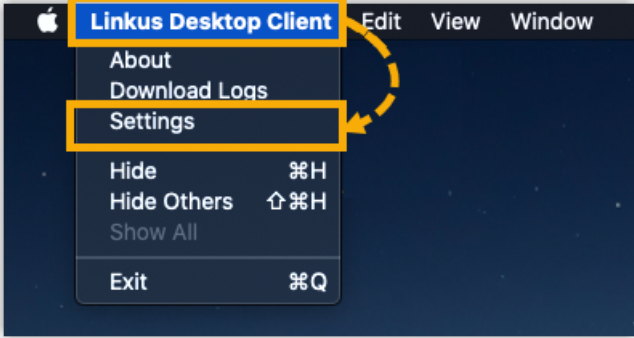
The following table lists the supported shortcut operations and their default hotkeys. The hotkeys vary depending on your operating system.

Shortcut Operation	Windows Hotkey	macOS Hotkey
Dial Selected Number	Ctrl+Shift+E	⌘+Shift+E
Answer	Ctrl+Shift+A	⌘+Shift+A
Blind	Ctrl+Shift+B	⌘+Shift+B
Attended	Ctrl+Shift+T	⌘+Shift+T
Hold/Resume	Ctrl+Shift+H	⌘+Shift+H
Hang Up	Ctrl+Shift+F	⌘+Shift+F
Send Message	Enter	Return

### Procedure

By default, all the operations using hotkeys are disabled. You can enable desired operations and hotkeys as follows.

1. Access the **Settings** menu of Linkus Desktop Client based on your operating system.


Operating System	Instruction
Windows	<p>On the system tray, right click  &gt; <b>Settings</b></p> 
macOS	<p>On the App menu, click <b>Linkus Desktop Client</b> &gt; <b>Settings</b>.</p> 

2. In the **Hotkeys** section, do as follows:


- a. **Optional:** To prevent hotkeys from becoming invalid due to hotkey conflicts, you can select the checkbox of **Notify When Hotkey Conflicts** to enable notification.



If enabled, each time you launch and log in to Linkus Desktop Client, it will automatically check for hotkey conflicts. If any, a pop-up window will be displayed to prompt the conflict.

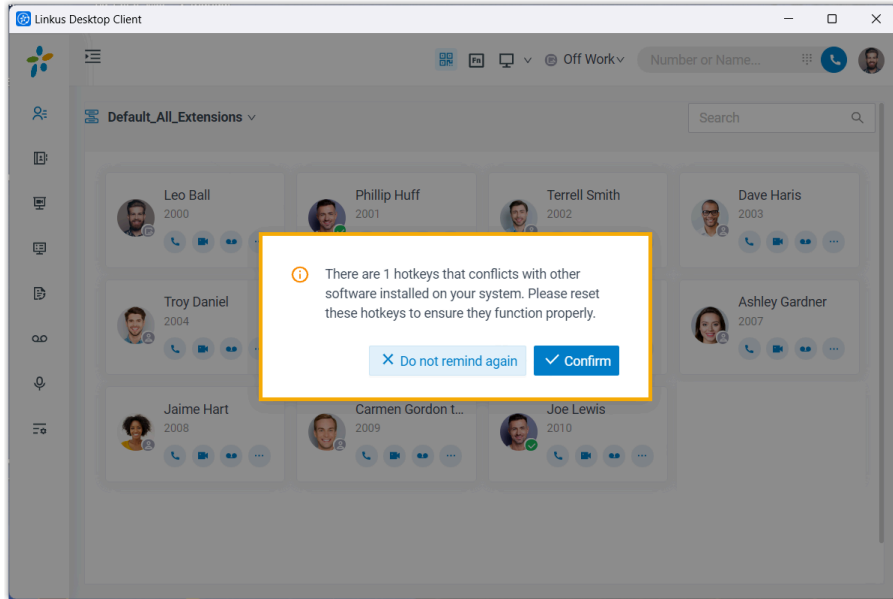

b. Enable desired shortcut operations and set up hotkeys.

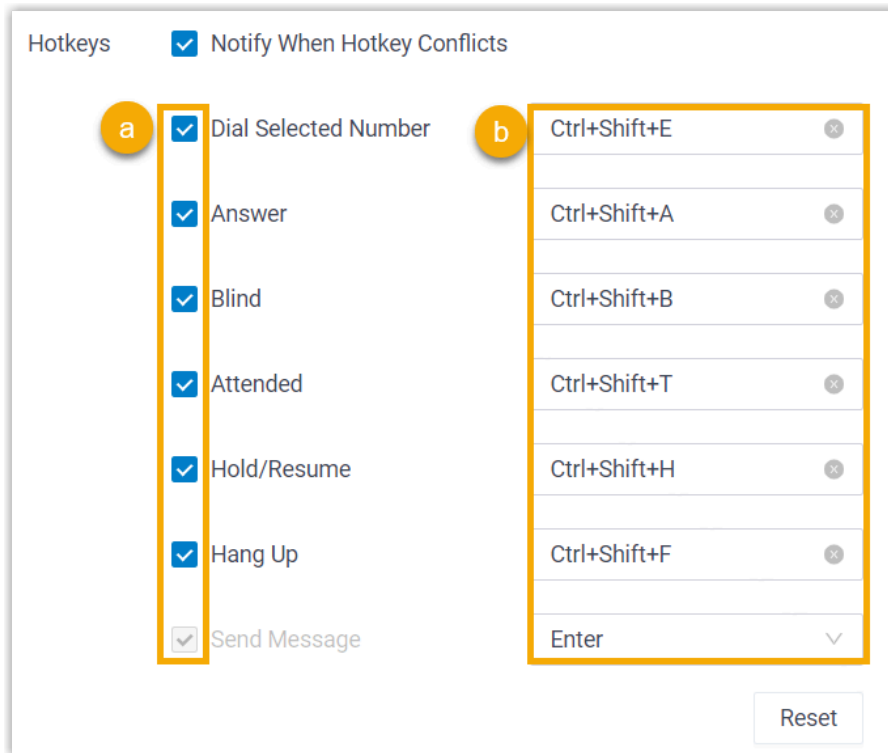

- i. Select the checkbox of the desired shortcut operation.
- ii. If you want to change the default hotkey, click the hotkey field on the right, then press the desired key combinations on your keyboard.

**Note:**

The key combinations must begin with `Ctrl`, `⌘`, `Shift`, or `Alt`, and contain at least one alphabetic or numeric character.

**Related information**

[Select and Dial with Hotkey](#)

## Select and Dial with Hotkey

Select & Dial with Hotkey feature allows you to quickly dial any phone numbers appear on your computer screen. No matter where the phone number is stored, you can simply select the number and press the hotkey to quickly dial the phone number via Linkus Desktop Client.


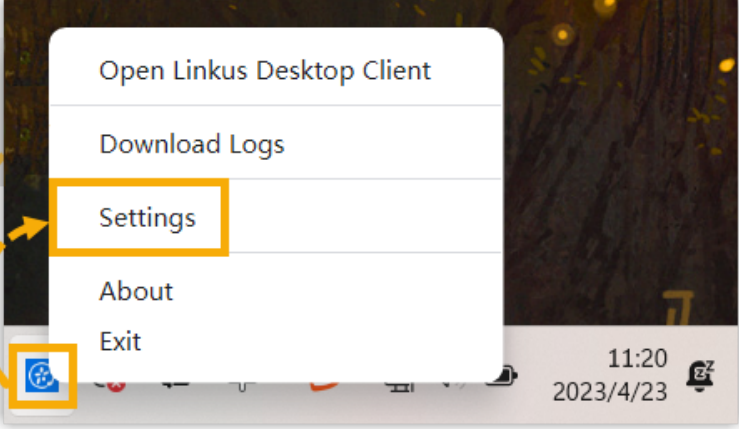
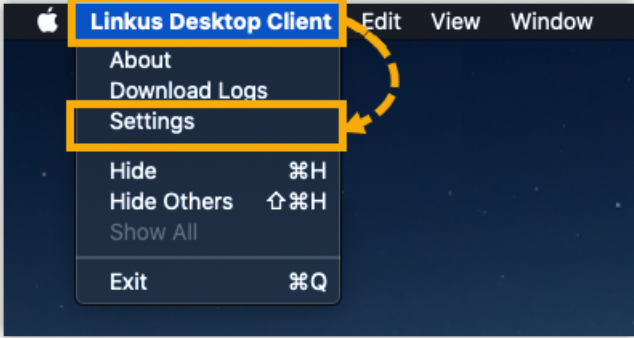
### Requirements

- **PBX Server:** Version 84.12.0.32 or later.
- **Linkus Desktop Client:**
  - **Windows Desktop:** 1.2.14 or later
  - **macOS Desktop:** 1.2.10 or later

### Step 1. Enable and set up hotkey

By default, the hotkey for 'Select and Dial with Hotkey' is disabled. You need to enable it on Linkus Desktop Client.

1. Access the **Settings** menu of Linkus Desktop Client based on your operating system.

Operating System	Instruction
Windows	<p>On the system tray, right click  &gt; <b>Settings</b></p> 
macOS	<p>On the App menu, click <b>Linkus Desktop Client</b> &gt; <b>Settings</b>.</p> 

2. In the **Hotkeys** section, do as follows:

Hotkeys  Notify When Hotkey Conflicts

a  Dial Selected Number
b


- a. Select the checkbox of **Dial Selected Number**.
- b. If you want to change the default hotkey, click the hotkey field on the right, then press the desired key combinations on your keyboard.



## Step 2. (Optional) Disable dial out immediately

By default, Linkus dials out immediately after you select a number and press the hotkeys. If you want to edit the phone number before dialing out, you can disable **Dial out immediately** setting on Linkus Desktop Client.

1. Go to **Settings** page.
2. In the **Call** section, unselect the checkbox of **Dial out immediately**.

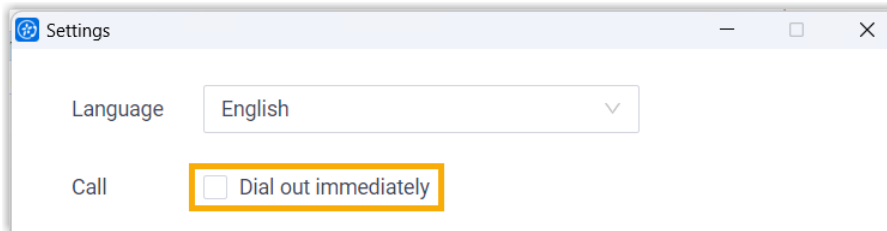

## Example

Example 1: Select & Dial out immediately	Example 2: Select & Dial out later
--	------------------------------------

# Calls

## Linkus Call Overview

Linkus Desktop Client allows you to connect to colleagues and external contacts via audio calls and video calls. This topic describes the requirements for audio call and video call, and the supported call features.

### Requirements

#### Audio call requirements

For audio call, contact system administrator to ensure that the PBX server's configurations are ready:

- **Web Server Protocol:** HTTPS
- **Codec:** Any of **u-law**, **a-law**, or **G722** is enabled on PBX server.

#### Video call requirements

For video call, besides the above requirements, make sure the followings are ready on PBX server:

- **PBX Plan:** Ultimate Plan
- **Codec:** Either **VP8** or **H264** is enabled on PBX server.



#### Note:

- Codec **VP8** is preferred.
- If **VP8** and **H264** are both enabled, make sure **VP8** has the top priority.

### Supported call features

Call Feature	Description
Audio Conferencing	<p>This feature allows you to initiate an instant audio conference during a call.</p> <p> <b>Note:</b> Up to <b>9</b> members are supported.</p>


Call Feature	Description
	For more information, see <a href="#">Audio Conferencing Overview</a> .
Call Flip	This feature allows you to flip an active call from Linkus Desktop Client to another device (with your extension registered), without any interruption to the conversation.  For more information, see <a href="#">Flip an Active Call between Devices</a> .
Call Switch	This feature allows you to retrieve an active call from the original device (with your extension registered) to Linkus Desktop Client, without any interruption to the conversation.  For more information, see <a href="#">Continue an Active Call on Linkus Desktop Client</a> .
Call Transfer	This feature allows you to transfer an ongoing call to another number.  For more information, see <a href="#">Transfer a call</a> .
Call Merge	This feature allows you to merge two active calls into an audio conference call.  For more information, see <a href="#">Merge Calls into an Audio Conference Call</a> .
Call Hold/Resume	This feature allows you to pause your conversation without having to hang up, and resume the call when you are ready.  For more information, see <a href="#">Hold and Resume a Call</a> .
Call Recording	This feature allows you to record calls and play back later to review and confirm information.  For more information, see <a href="#">Record a Call</a> .

## Flip an Active Call between Devices

Call Flip feature allows you to effortlessly and seamlessly flip an active call from Linkus Desktop Client to another device (with your extension registered), without any interruption to the conversation.

### Scenario

Assume that you are in a call with a customer, but have to get out of the office. In this case, you can flip the call to your mobile phone, keeping talking without customer knowing the switchover.

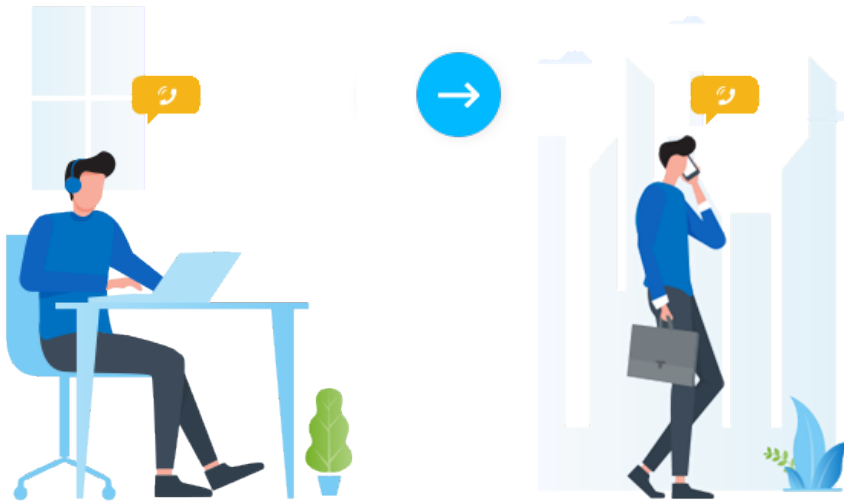


## Requirements

Your extension has been registered on more than one device.

## Procedure

1. During an active call, click **Call Flip**.

All the other devices where your extension is registered are displayed.

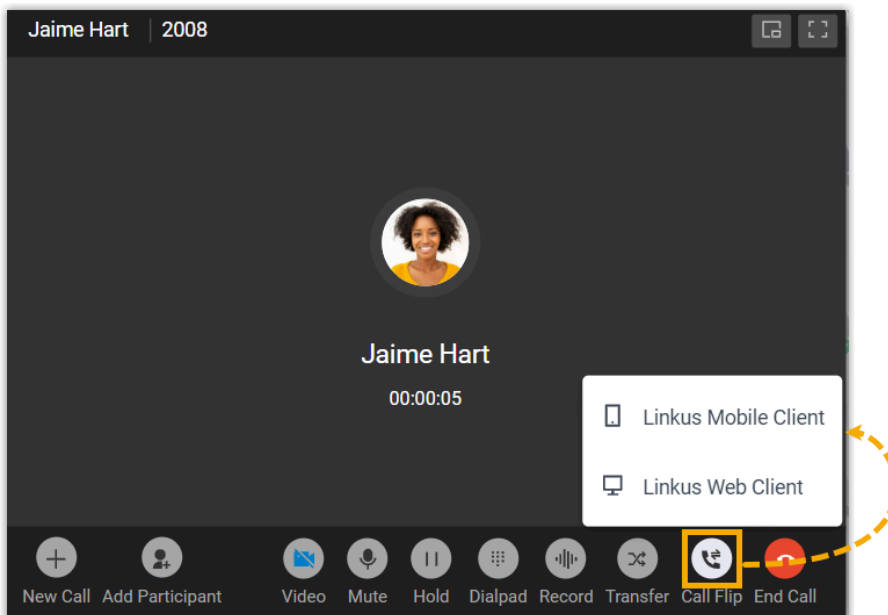


2. Click the desired device.

Linkus will make a call to your extension on the device.

**Tip:**

In case you want to cancel call flip, click **Cancel** at the bottom-right corner of the call screen.

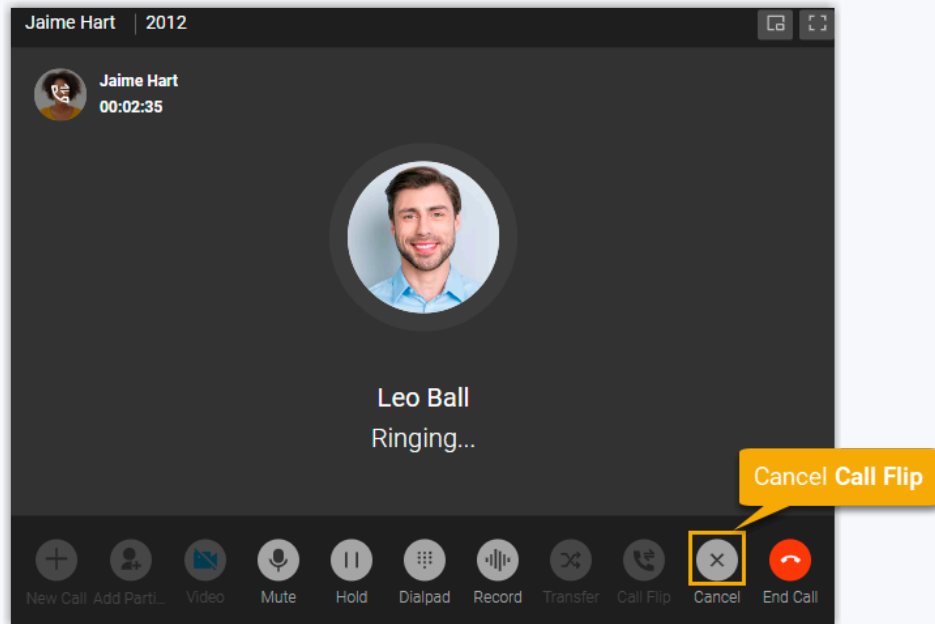

3. Answer the call on the selected device.

The call is flipped from Linkus Desktop Client to the selected device.

**Related information**

[Continue an Active Call on Linkus Desktop Client](#)

## Continue an Active Call on Linkus Desktop Client

Call Switch feature allows you to retrieve an active call from the original device (with your extension registered) to Linkus Desktop Client, without any interruption to the conversation.


**Scenario**

Assume that you answer a call from a customer while on the road, and you want to be hands-free when returning to the office. In this case, you can retrieve the active call from mobile phone to Linkus Desktop Client, keeping talking without customer knowing the switchover.



## Requirements

- **Linkus Desktop Client:** In **Desktop Client** mode.

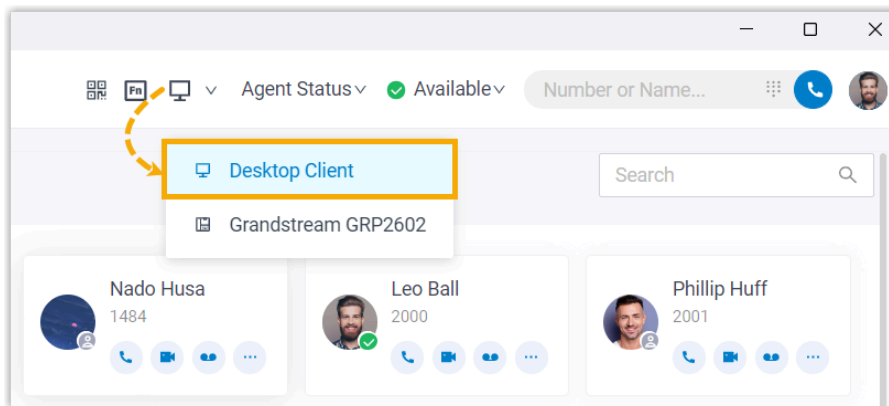


- **Extension:** Your extension has been registered on more than one device.

## Prerequisites

You have an active call on another device.

## Procedure

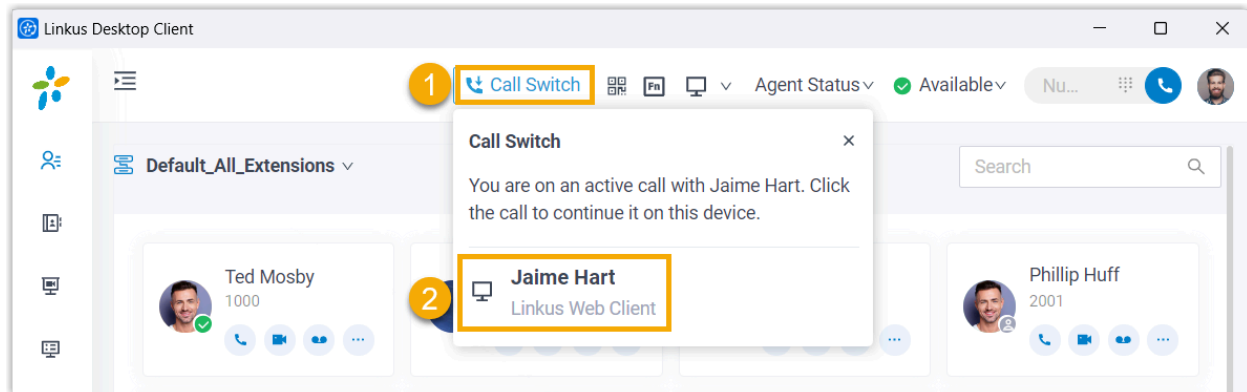

1. On the top of Linkus Desktop Client, click **Call Switch**.

The active call on another device is displayed.

2. Click the call.

## Result

The call is retrieved from the original device to Linkus Desktop Client.

### Related information

[Flip an Active Call between Devices](#)

## Transfer a call

Call Transfer feature allows you to transfer an ongoing call to another number. For example, if you receive a call from a customer who reaches the wrong person or team, you can transfer the call to the correct one rather than asking the customer to hang up and call a different number.

### Types of Call Transfer

There are two types of call transfer:


- **Blind Transfer:** Transfer an ongoing call to a third party immediately without giving him or her prior notification.


For more information, see [Perform a blind transfer](#).

- **Attended Transfer:** Put the ongoing call on hold and establish a second call with third party to pass on all relevant information and get his or her consent before transferring the call.

For more information, see [Perform an attended transfer](#).

## Perform a blind transfer


1. During an active call, click  (**Transfer**) on the call screen, then select **Blind Transfer**.

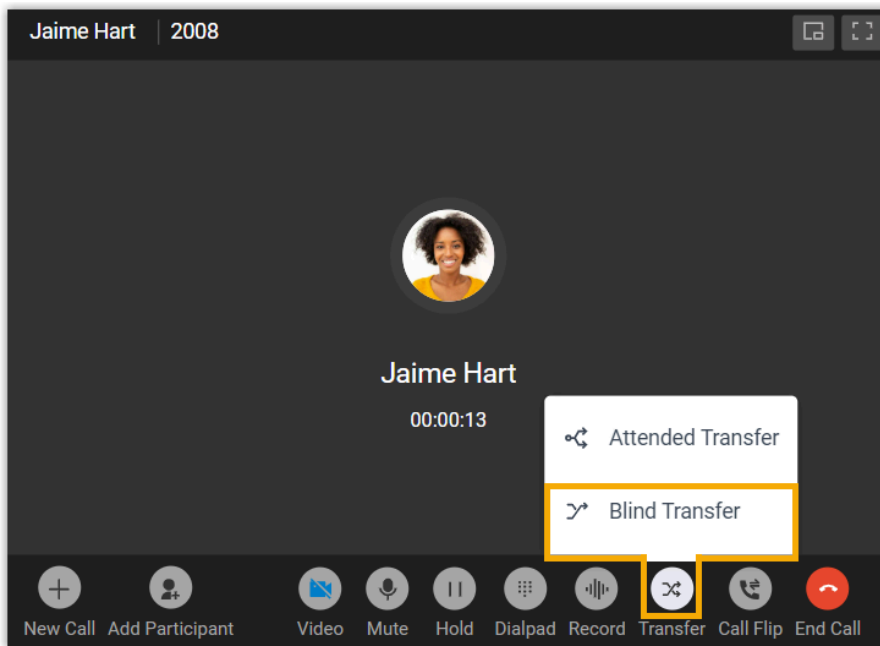


The call is put on hold.

2. Select the desired individual using either of the following methods.
  - In the right-panel, select a list and click on the desired extension user or contact who you want to transfer the call to.



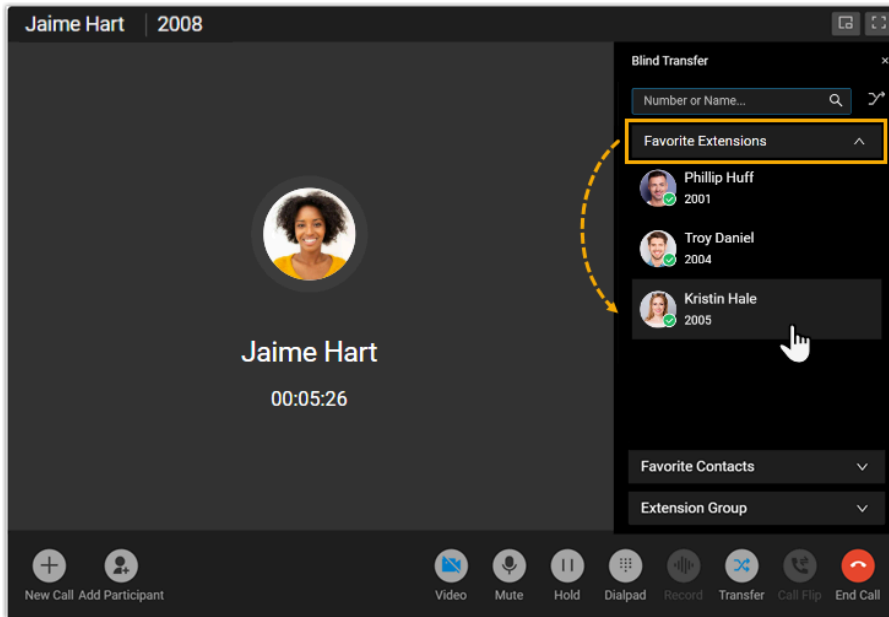


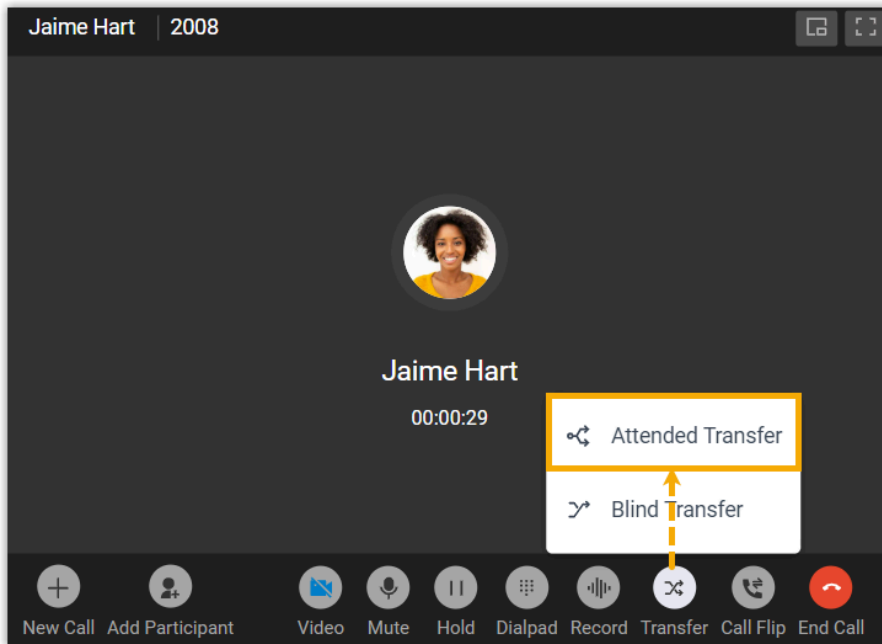
- In the search bar, enter the number or the name of the extension user or contact who you want to transfer the call to, then select the desired number from the result.

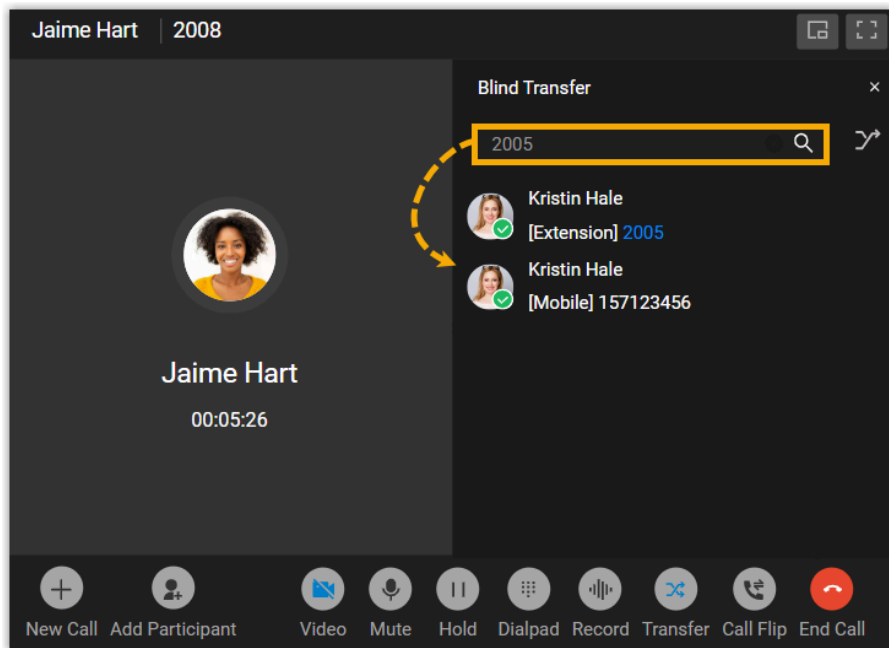

The current call is disconnected; The specified extension user or contact will receive the call. When the call is answered, the other two parties are connected.


## Perform an attended transfer

1. During an active call, click  (**Transfer**) on the call screen, then select **Attended Transfer**.




The call is put on hold.

2. Select the desired individual using either of the following methods.
  - In the right-panel, select a list and click on the desired extension user or contact who you want to transfer the call to.

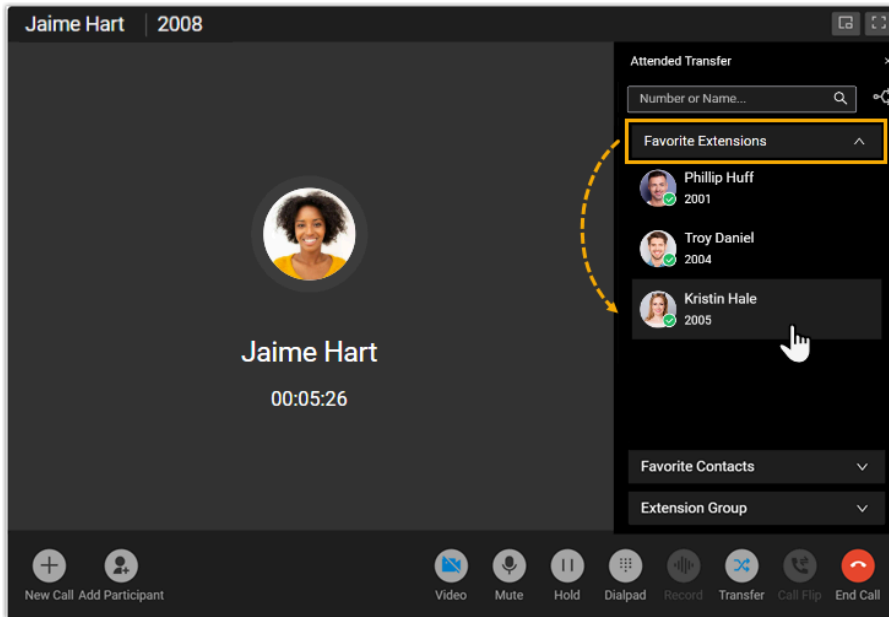


- In the search bar, enter the number or the name of the extension user or contact who you want to transfer the call to, then select the desired number from the result.

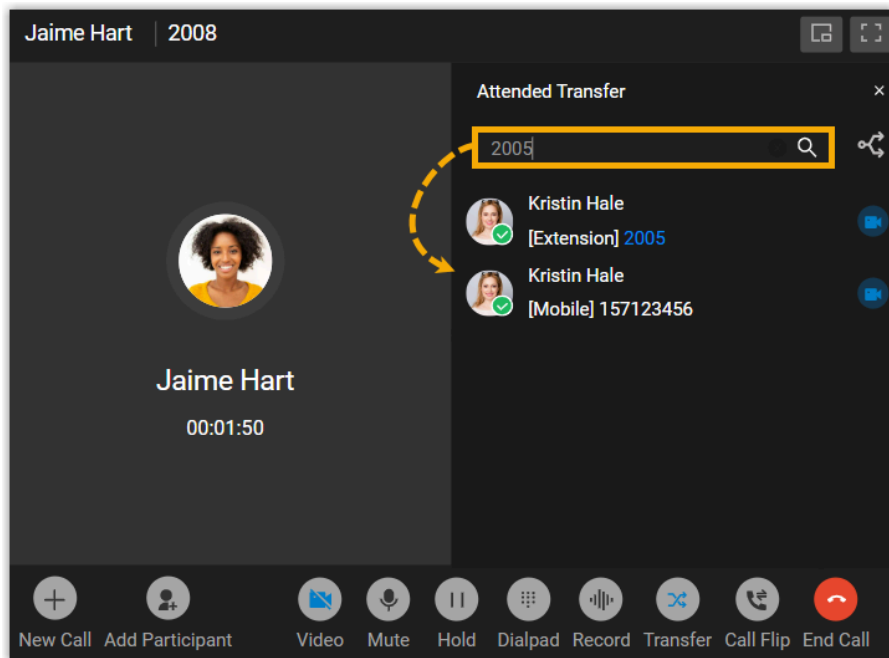

The specified extension user or contact will receive a call.

3. If the specified contact answers the call, you can talk to the contact to pass on all relevant information first, then click **Transfer**.

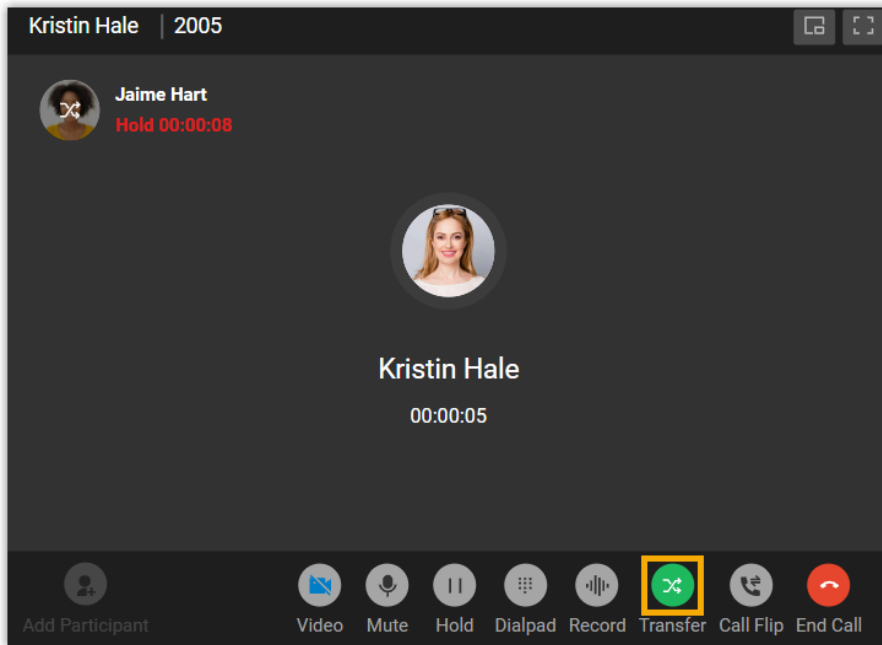

The current call is disconnected; The other two parties are connected.

### Related information

[VoIP Features for Dummies - Call Transfer](#)

## Merge Calls into an Audio Conference Call

When there are two active calls on Linkus Desktop Client, you can merge them into a single audio conference call, and host and manage it as the conference host.

### Requirements and restrictions

#### Requirements

Make sure that the version of Linkus Desktop Client meets the following requirements:


- **Windows Desktop:** Version 1.2.14 or later
- **Mac Desktop:** Version 1.2.10 or later

#### Restrictions

Only calls of the same type (either both voice calls or both video calls) can be merged into an audio conference call.

## Prerequisites


- Make sure that **Linkus Desktop Client** is in **Desktop Client** mode.

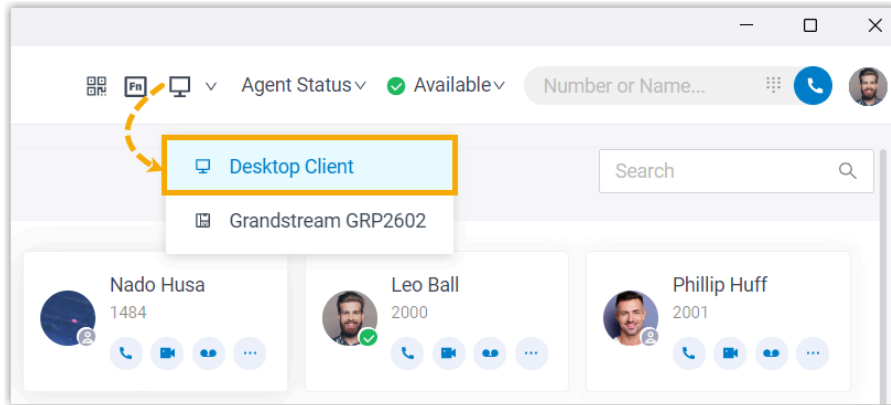

- You have two active calls of the same type on Linkus Desktop Client.

## Procedure


1. At the bottom of the call panel, click **Merge Calls**.

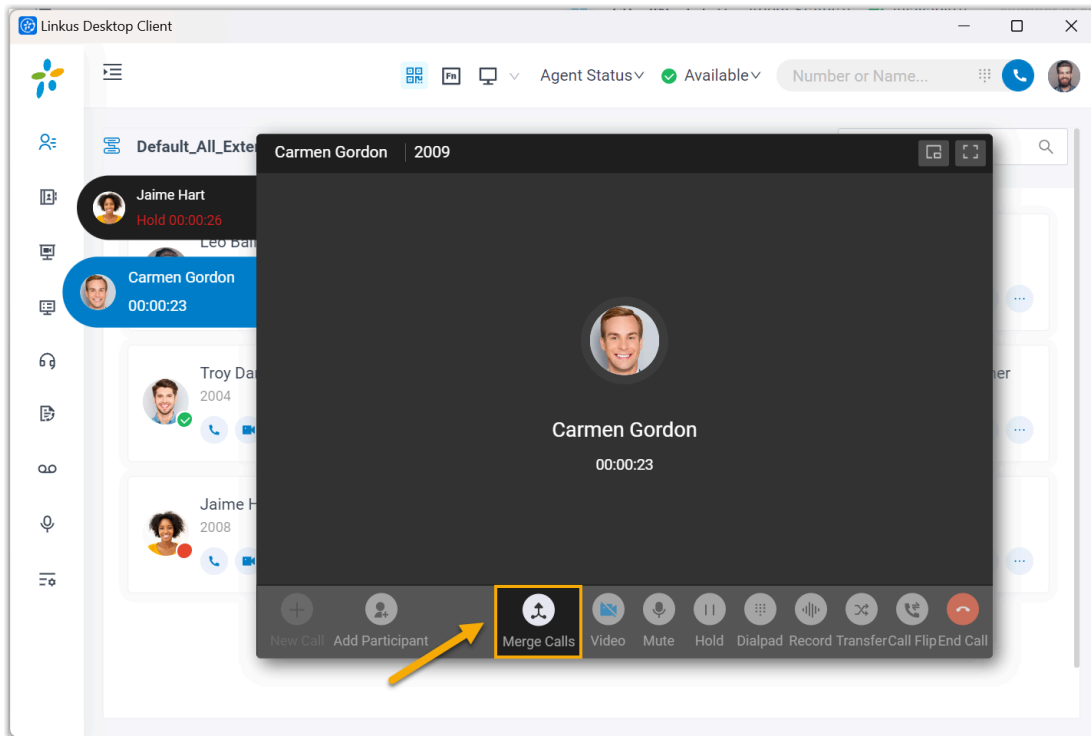

2. In the pop-up window, click **Confirm**.

## Result

The two active calls are merged into one audio conference call, and you are the host.

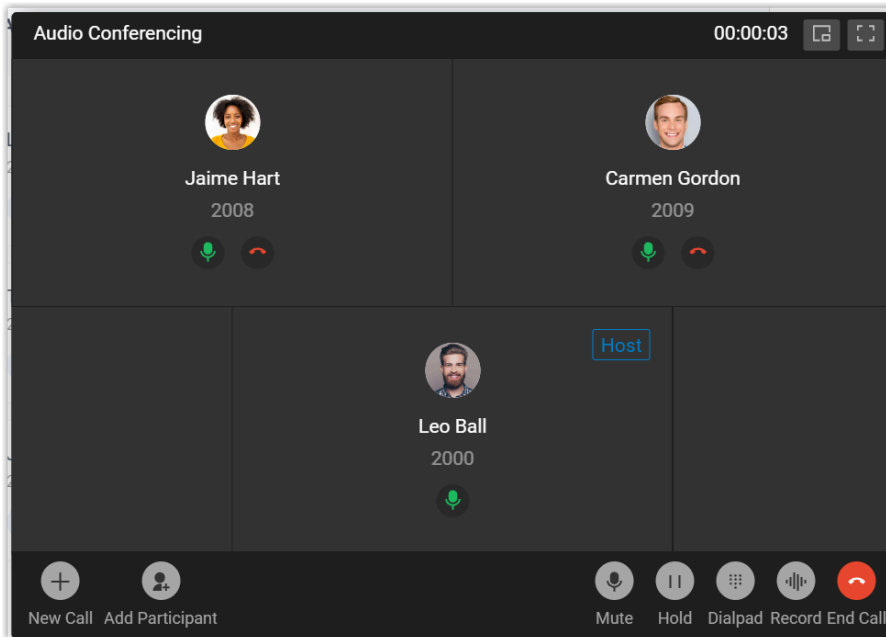

## Related information

[Audio Conference Call Operations](#)

## Hold and Resume a Call

Call Hold and Resume feature allows you to pause your conversation without having to hang up, and resume the call when you are ready.

## Procedure

1. To put a call on hold, click **|| (Hold)** on the call screen during an active call.  
The held party can not communicate with you; The held party may hear a piece of music, depending on system administrator's configuration.
2. To resume the call, click **|| (Hold)** again.  
You can communicate with each other now.

# Record a Call

Call Recording feature allows you to record calls and play back later to review and confirm information.

## Requirements

System administrator has granted you the permission to record calls.

## Procedure

During an active call, click  (**Record**) on the call screen.

## Result

- The call is being recorded.
- Both sides may hear a voice prompt announcing that the call is now being recorded, this depends on system administrator's configuration.

# Audio Conferencing


## Audio Conferencing Overview

Audio Conferencing is a feature that aims for instant meeting while on a call. If third party involvement is needed during a call, you can invite them to an audio conference by directly dialing their phone numbers.

### Restrictions

Up to **9** members can be on an audio conference call.

### Highlights

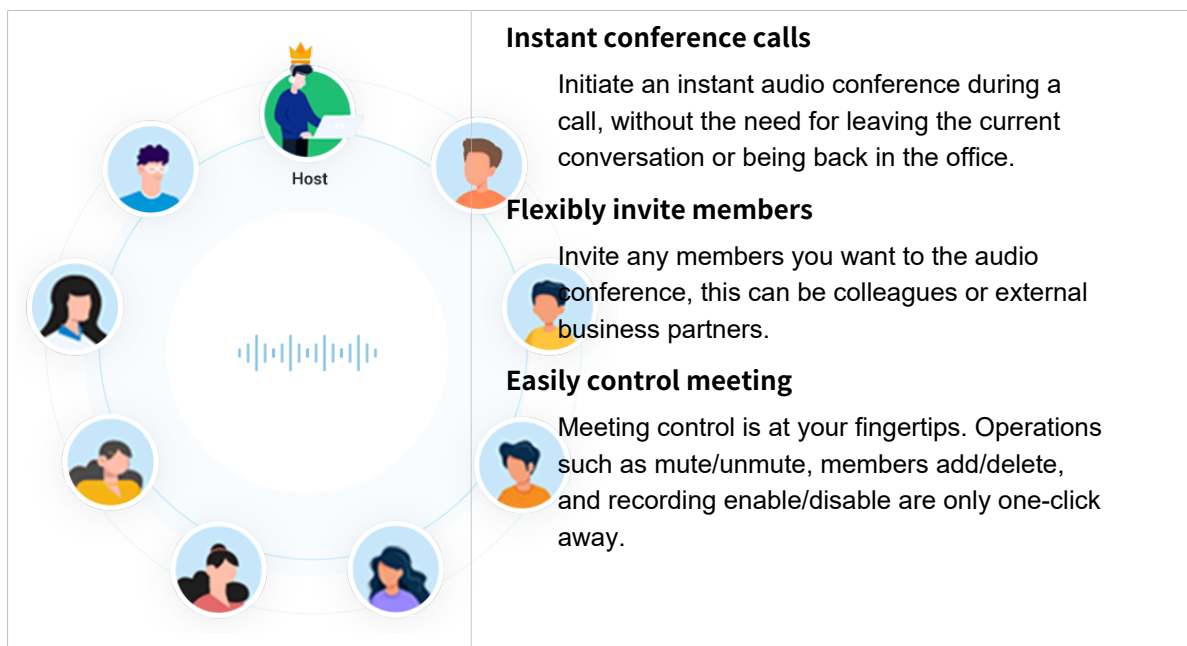

## Invite Participants to an Audio Conference Call

If third party involvement is needed while on a call, you can send the invitation by directly dialing them. As soon as the invitation is sent out, the call would turn into an audio conference call.




## Prerequisites


Make sure Linkus Desktop Client is in **Desktop Client** mode, or you can NOT invite participants to an audio conference call.

## Procedure

1. During an active call, click **Add Participant** at the bottom-left corner of the call screen.
2. On the right panel, invite participants using either of the following methods.
  - Select a list and click on the desired extension user or contact.

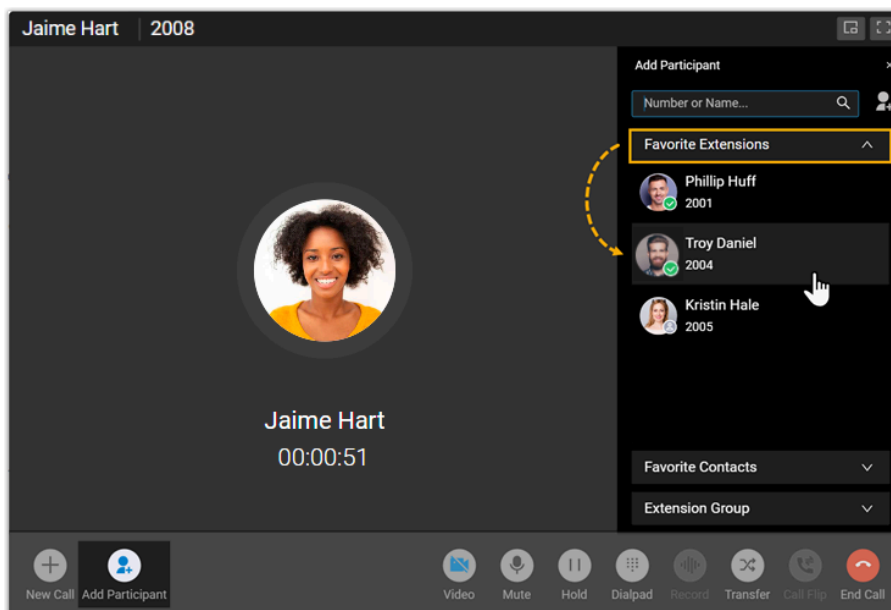

- To directly search specific individuals, do as follow:

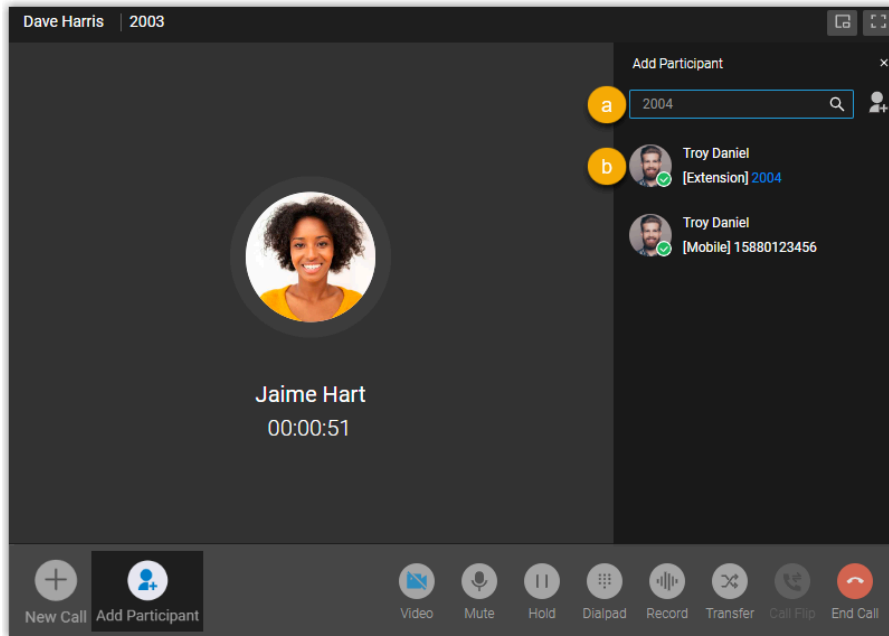

- a. In the search bar, search extension users or native contacts by the supported filters, or directly invite external users by entering a phone number.

Invitee	Supported Filters
Extension Users	<ul style="list-style-type: none"> <li>◦ Extension Name</li> <li>◦ Extension Number</li> <li>◦ Email Address</li> <li>◦ Mobile Number</li> </ul>
Native Contacts	<ul style="list-style-type: none"> <li>◦ Contact Name</li> <li>◦ Company Name</li> <li>◦ Email Address</li> <li>◦ Mobile Number</li> </ul>
External Users	<ul style="list-style-type: none"> <li>◦ External Number</li> </ul>

- b. Click on the desired individual in the search results.



## Result


- The phone call turns into an audio conference call, where you can see a call is sending to the invitee without interrupting the current conversation.




### Note:

- If the invitee is an extension user that has set up call forwarding rules, Linkus will still keep ringing the user until timeout.

 In case you want to cancel invitation, click  under the desired invitee.

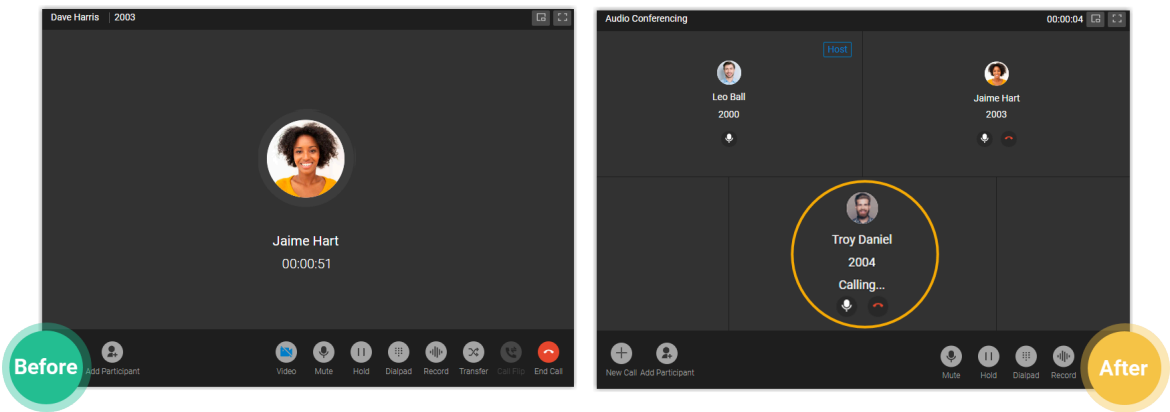

- The one who sends the call invitation first will be the conference "Host". The Host can manage the audio conference. For more information, see [Control an In-progress Audio Conference](#).

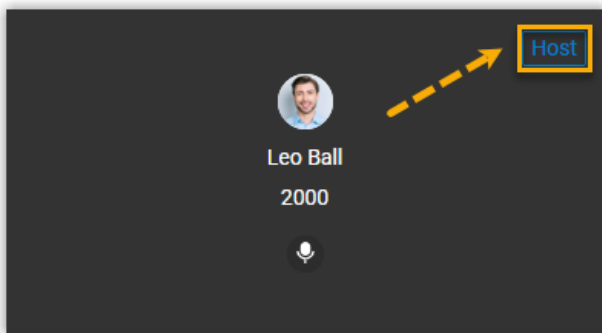

## Audio Conference Call Operations

This topic describes what operations a host and a participant can do in an audio conference call.

### Operations

Refer to the following table to check the available operations for a host and a participant in an audio conference call.

Operation	Host	Participant
Turn on/Turn off one's own audio	√	√
Turn on/Turn off participants' audio	√	×


Operation	Host	Participant
Record a conference	√	×
End a conference	√	×
Leave a conference	√	√
*View participants list	√	√
*Invite participants	√	√
Remove participants	√	×

**Note:**

Operations marked with \* only work for **Linkus Desktop Client users, Linkus Web Client users, and 'Yeastar Linkus for Google' users.**

## Control an In-progress Audio Conference

### Preview of an in-progress audio conference

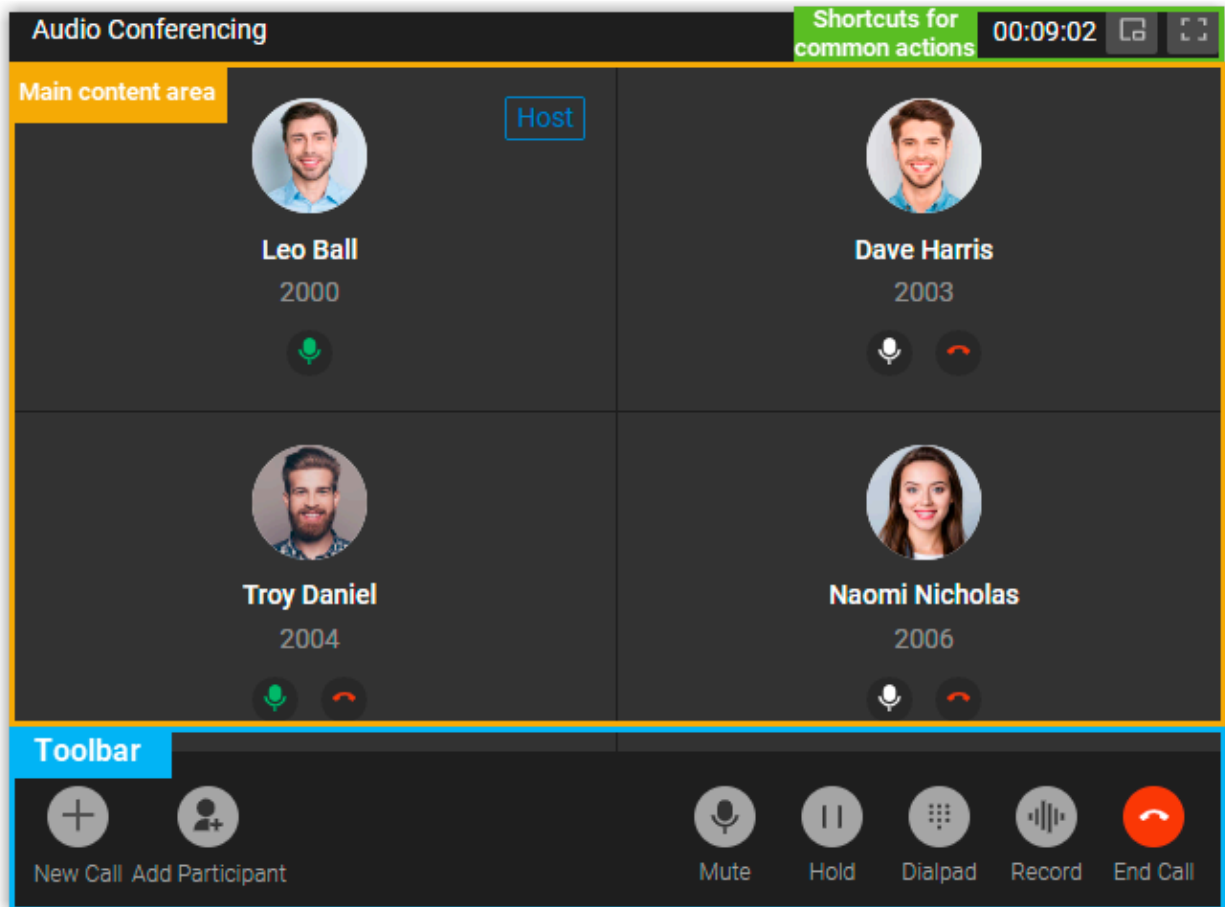

### Shortcuts for common actions



Get call window zoomed out.




Full screen mode.

### Main content area

Display audio feed of all the participants.


If you are the host, you can manage participants as follows:

- Click  to mute or unmute a specific participant.

**Tip:**

The microphone status can be synchronized on the call screen of the followings:

- **Linkus Mobile Client**
- **Linkus Desktop Client**
- **Linkus Web Client**
- **Yeastar Linkus for Google**

- Click  to remove an existing participant from the audio conference, or to cancel inviting a new participant.

## Toolbar

### New Call

Place another call while you are on the audio conference call.

**Note:**

You can be on two calls at most. If you make or receive another call, the audio conference call will be automatically held.

### Add Participant

Add participants to the audio conference call.

### Mute

Mute or unmute yourself.

### Hold/Resume

Hold or resume yourself.

### Dialpad

Press a key to send DTMF signal.

### Record

Control recording for the conference call.

**Note:**



- Only the authorized conference host can control the recording during the conference call, as well as view and manage the recording file generated after the conference call ended.
- If conference host exits an audio conference call that is being recorded, the recording would stop.

## End Call

End or leave the conference call.



### Note:

Only the conference host can end the conference call.

# Exit or End an Audio Conference

This topic describes how to exit or end an audio conference.

## Exit an audio conference

You can exit the audio conference if you need to leave early due to unforeseen circumstances.

### Procedure

1. If you are the host, you can exit the audio conference as follows:
  - a. On the bottom toolbar, click **End Call**.
  - b. Select **Leave Conference** and click **Confirm**.  
You exit the conference call; The audio conference is still in progress without a host, and none of the participants can invite others to join the conference.



### Note:

If you have enabled recording for the audio conference, the recording stops as soon as you leave the conference.

2. If you are NOT the host, you can directly hang up the conference call.

## End an audio conference

Only the conference host can end the audio conference.

### Procedure

1. On the bottom toolbar, click **End Call**.
2. Select **End Conference** and click **Confirm**.

### Result

The conference is ended from all the participants' sides and your side.




# Call Logs

## Check and Manage Call Logs


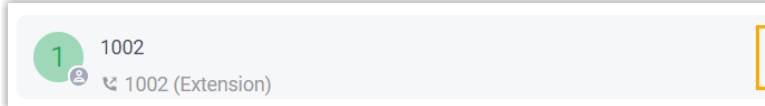
This topic describes how to view the calls that you made, answered, or missed, and how to manage the call logs (including personal call logs and queue call logs) on Linkus Desktop Client.



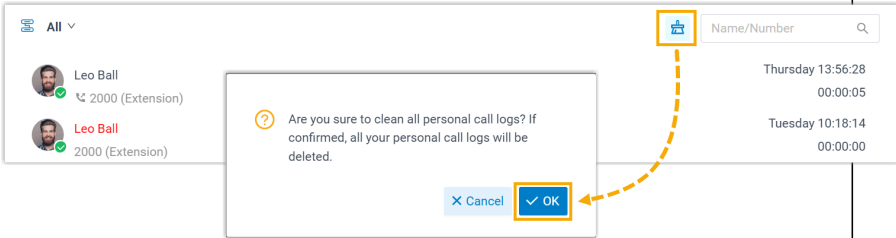

### Check and manage personal call logs

1. On Linkus Desktop Client, go to **Call Logs**.
2. **Optional:** At the top-left corner, click , then select a communication type to filter call logs.



3. Manage the call logs according to your needs.

Operation	Instruction
Place a call	<p>You can directly place a call from a call log via the following methods:</p> <ul style="list-style-type: none"><li>• Double click the desired call log.</li><li>• Hover your mouse over the call log, then click .</li></ul> 
Delete a call log	To delete a call log, do as follows:

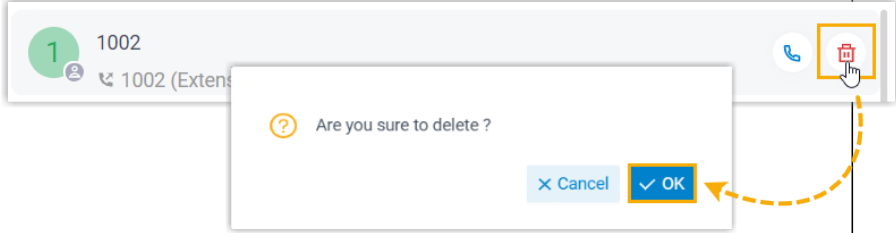Operation	Instruction
	 <p>a. Hover your mouse over the desired call log, then click .</p> <p>b. In the pop-up window, click <b>OK</b>.</p>
Clear all call logs	<p>To delete all your personal call logs, do as follows:</p>  <p>a. Click  on the top-right corner.</p> <p>b. In the pop-up window, click <b>OK</b>.</p> <p>All your personal call logs are removed from Linkus Desktop Client and Linkus Web Client.</p>

## Check and manage queue call logs


If you are an agent of a call queue, and are authorized to view the queue's call logs, you can check and manage the queue call logs on your Linkus Desktop Client.

### Requirements


System administrator has granted you the viewing permission of queue call logs.



### Procedure

1. On Linkus Desktop Client, go to **Call Logs > Queue Call Logs**.
2. **Optional:** At the top of the list, filter or search the desired call logs.

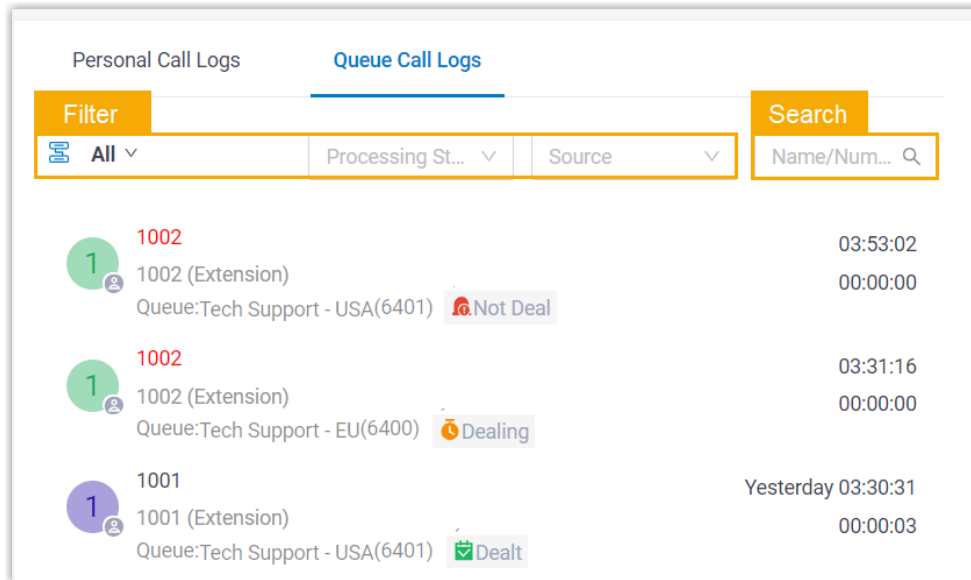

### 3. Manage the call logs according to your needs.

Operation	Instruction
<p>Check the details of queue call logs</p>	<p>You can conveniently check the source of the queue call logs, as well as the processing status of missed queue calls.</p> <div data-bbox="672 1066 1624 1186" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> </div> <ul style="list-style-type: none"> <li>• <b>Source:</b> The queue the call came from.</li> <li>• <b>Processing Status:</b> The processing status of a missed queue call.</li> </ul>
<p>Place a call</p>	<p>You can directly place a call from a call log via the following methods:</p> <ul style="list-style-type: none"> <li>• Double click the desired call log.</li> <li>• Hover your mouse over the call log, then click .</li> </ul> <div data-bbox="748 1598 1624 1703" style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> </div>
<p>Change the processing status of a missed queue call</p>	<p>If you decide to handle a missed queue call, or you have handled it, you can change the processing status of the missed queue call.</p>

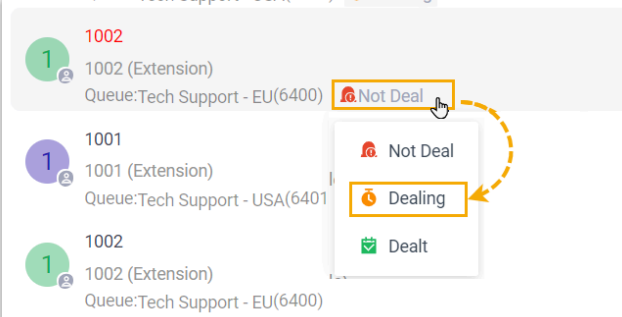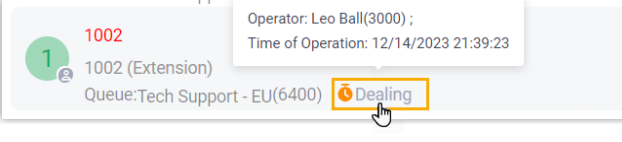Operation	Instruction
	
	<p>a. Click the processing status beside the call log.</p> <p>b. In the drop-down list, select the desired processing status.</p> <p>The processing status is changed; All the authorized agents can see the change, and check the operation record by hovering mouse over the processing status.</p>
	

# Voicemails

## Check and Manage Voicemails

This topic describes how to check and manage your voicemails on Linkus Desktop Client.




### Note:




Changes made to voicemails on Linkus Desktop Client will be synchronized to Linkus Web Client and Linkus Mobile Client.

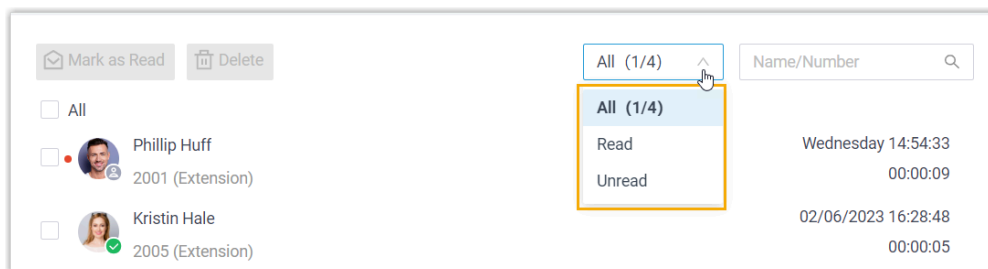


## Procedure

1. On Linkus Desktop Client, go to **Voicemails**.
2. **Optional:** Select specific read status to filter voicemails.



3. Check and manage the voicemails according to your needs:

Operation	Instruction
Listen to a voicemail	<ol style="list-style-type: none"><li>a. Hover your mouse over the desired record.</li><li>b. At the right side, click .</li></ol> <p>An unread voicemail will be marked as read.</p>
View a transcribed voicemail text	<p> <b>Note:</b> This operation is available only if system administrator has set up voicemail transcription feature.</p> <ol style="list-style-type: none"><li>a. Hover your mouse over the desired record.</li><li>b. At the right side, click .</li></ol>
Place a call	You can directly place a call from a voicemail record via the following methods:

Operation	Instruction
	<ul style="list-style-type: none"> <li>• Double click the desired record.</li> <li>• Hover your mouse over the desired record, and click .</li> </ul>
Download a voicemail	<ol style="list-style-type: none"> <li>a. Hover your mouse over the desired record.</li> <li>b. At the right side, click .</li> </ol>
Change the read status	<ul style="list-style-type: none"> <li>• To mark a voicemail as read or unread, do as follows: <ol style="list-style-type: none"> <li>a. Right click on the desired record.</li> <li>b. Click <b>Mark as Read</b> or <b>Mark as unread</b>.</li> </ol> </li> <li>• To bulk mark voicemails as read, do as follows: <ol style="list-style-type: none"> <li>a. Select the checkboxes of the desired records.</li> <li>b. At the top menu, click <b>Mark as Read</b>.</li> </ol> </li> </ul>
Delete voicemail(s)	<ul style="list-style-type: none"> <li>• To delete a voicemail, do as follows: <ol style="list-style-type: none"> <li>a. Hover your mouse over the desired record.</li> <li>b. At the right side, click .</li> <li>c. In the pop-up window, click <b>OK</b>.</li> </ol> </li> <li>• To bulk delete voicemails, do as follows: <ol style="list-style-type: none"> <li>a. Select the checkboxes of the desired voicemails.</li> <li>b. At the top menu, click <b>Delete</b>.</li> <li>c. In the pop-up window, click <b>OK</b>.</li> </ol> </li> </ul>

# Recordings

## Check and Manage Recordings

This topic describes how to check and manage your call recordings on Linkus Desktop Client.



**Note:**


Changes made to recordings on Linkus Desktop Client will be synchronized to Linkus Web Client and Linkus Mobile Client.

### Requirements


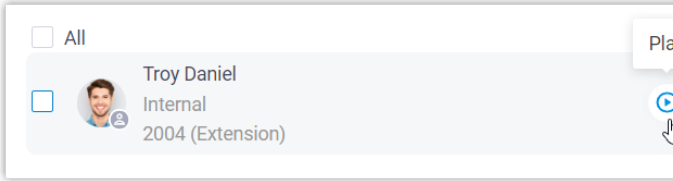

System administrator has granted you the permission to view recordings.

### Procedure



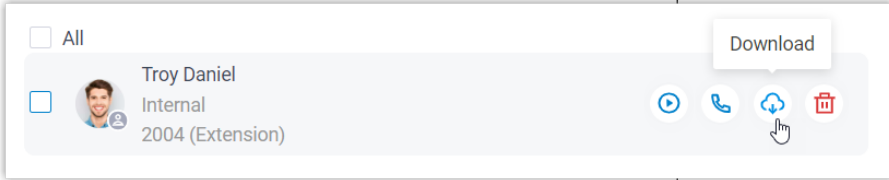

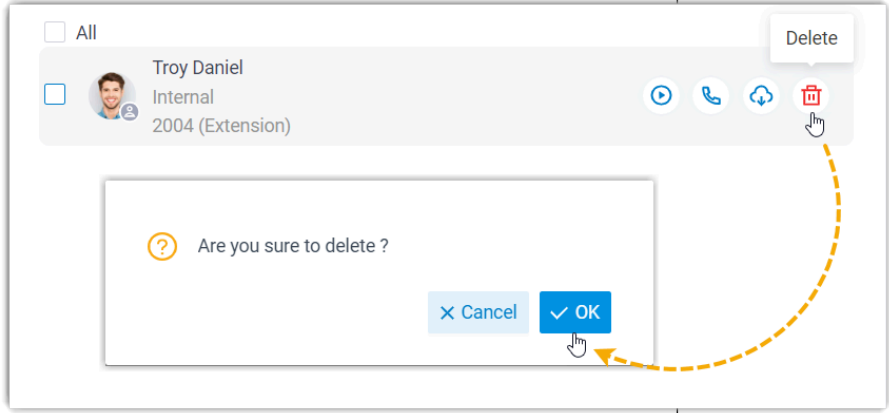
1. On Linkus Desktop Client, go to **Recordings**.

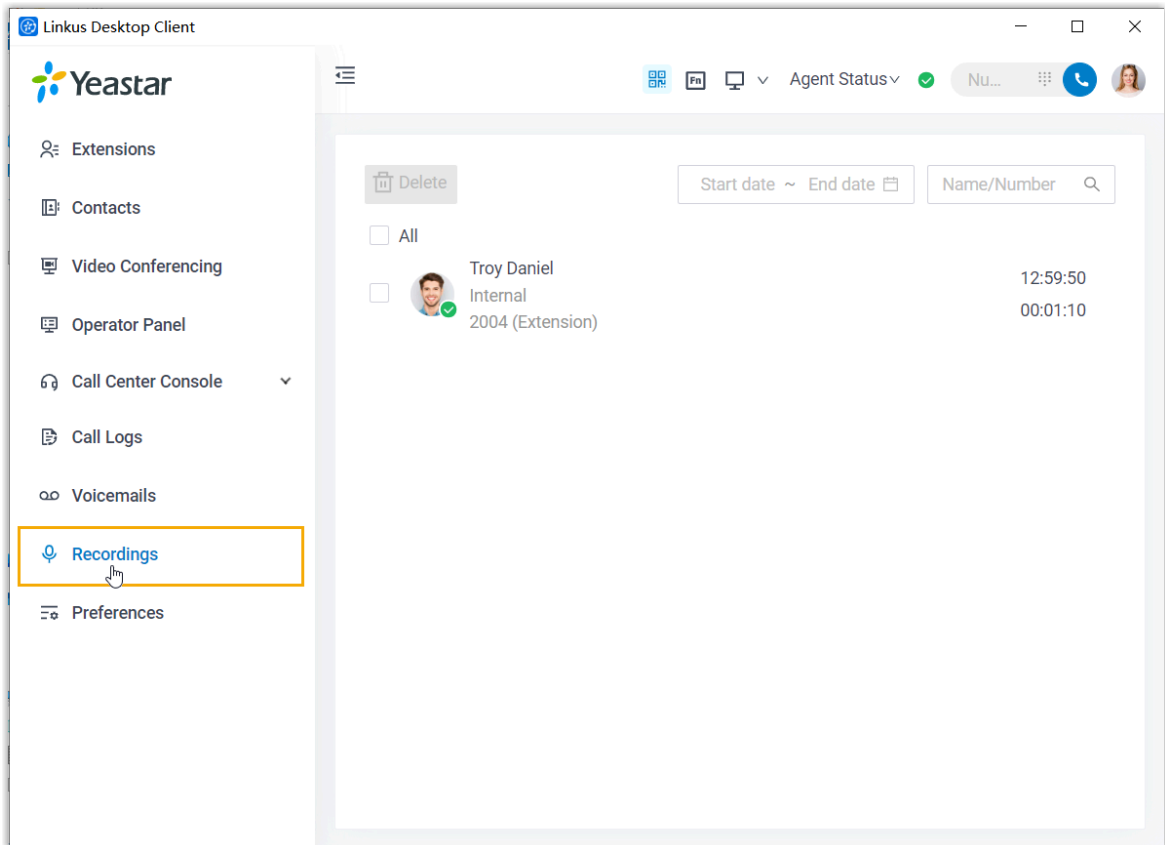


2. Check and manage the call recordings according to your needs.

Operation	Instruction
Listen to a call recording	<p>a. Hover your mouse over the desired record.</p> <p>b. At the right side, click .</p> <div data-bbox="727 1314 1615 1493" style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <p>A snippet of the recording list from the screenshot above, showing the 'Troy Daniel' entry. A mouse cursor is hovering over the play button icon on the right side of the entry. A tooltip with the word 'Play' is visible above the play button.</p> </div>
Place an audio call	<p>You can directly place an audio call from a call recording record via the following methods:</p> <ul style="list-style-type: none"> <li>• Double click the desired record.</li> <li>• Hover your mouse over the desired record, then click .</li> </ul>

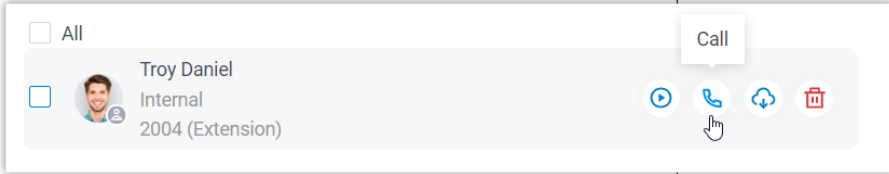

Operation	Instruction
	
Download a call recording	<p>a. Hover your mouse over the desired record.</p> <p>b. At the right side, click .</p> 
Delete call recording(s)	<ul style="list-style-type: none"> <li>To delete a call recording, do as follows:           <ol style="list-style-type: none"> <li>Hover your mouse over the desired record.</li> <li>At the right side, click .</li> <li>In the pop-up window, click <b>OK</b>.</li> </ol> </li> <li>To bulk delete call recordings, do as follows:</li> </ul> 

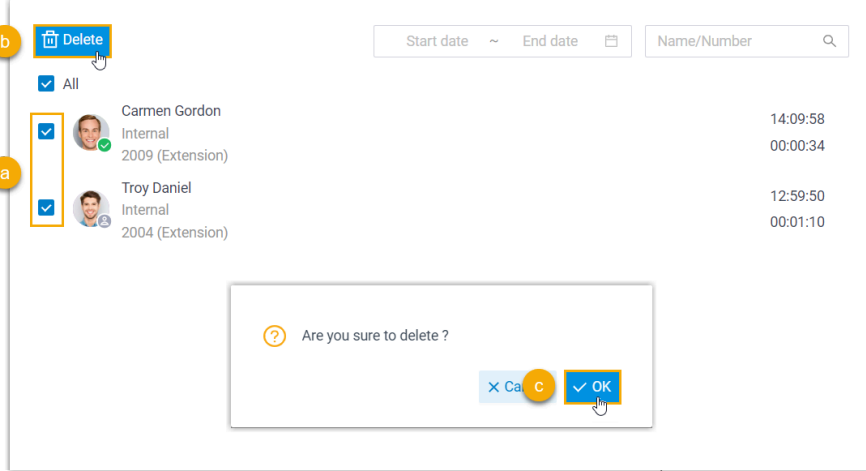
Operation	Instruction												
	 <p>The screenshot shows a software interface with a top menu bar containing a 'Delete' button (labeled 'b'). Below the menu is a list of call recordings with checkboxes (labeled 'a') and a confirmation dialog box (labeled 'c') that asks 'Are you sure to delete?' with 'OK' and 'Cancel' buttons.</p> <table border="1"><thead><tr><th>Start date</th><th>End date</th><th>Name/Number</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></tbody></table> <p>a. Select the checkboxes of the desired call recordings.</p> <p>b. At the top menu, click <b>Delete</b>.</p> <p>c. In the pop-up window, click <b>OK</b>.</p>	Start date	End date	Name/Number									
Start date	End date	Name/Number											


# Upgrade

## Upgrade Linkus Desktop Client


When a new version is released, Linkus Desktop Client will show a pop-up window, where you can find out what's new in the latest version. You can upgrade to the new version immediately or later. If you choose to upgrade later, follow the instructions in this topic to upgrade Linkus Desktop Client anytime you want.

1. Access the menu of Linkus Desktop Client based on your operating system.

- **For Windows:** On the system tray, right click .

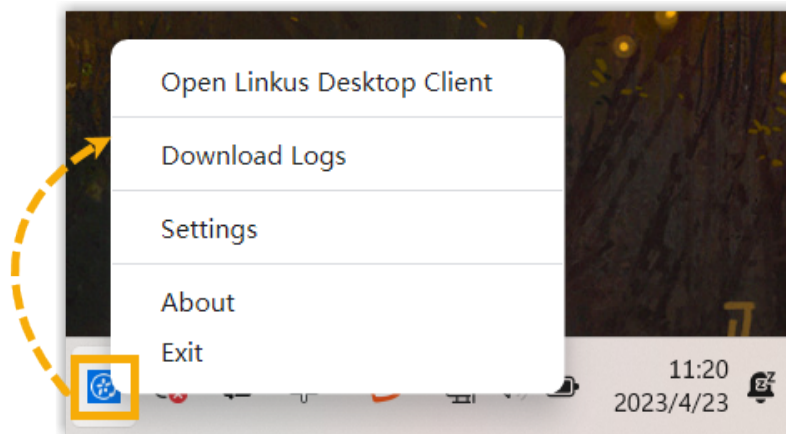


- **For macOS:** On the App menu, click **Linkus Desktop Client**.

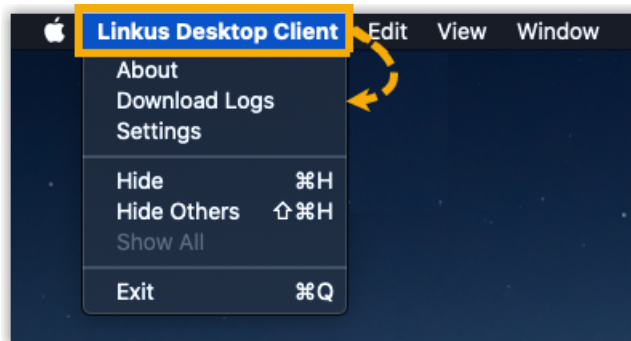

2. Select **About** from the menu.
3. In the pop-up window, click **Check for updates**.

A window pops up to show you what's new in the latest version.

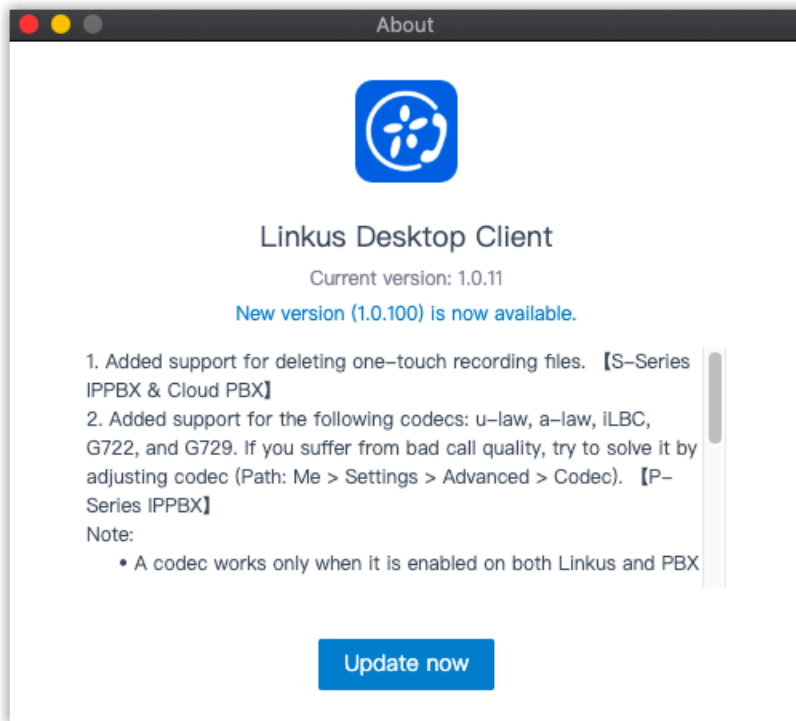

4. Click **Update Now**.

The new installation package is downloaded.


5. Install the installation package.


When the installation is completed, Linkus Desktop Client is upgraded successfully.

# Bug Reporting


## Report Linkus Problems

If you encounter problems with your Linkus Desktop Client, you can download Linkus debug logs and send the logs to Yeastar support for analysis.

1. Download Linkus debug logs.
  - a. Access the menu of Linkus Desktop Client based on your operating system.
    - **For Windows:** On the system tray, right click .

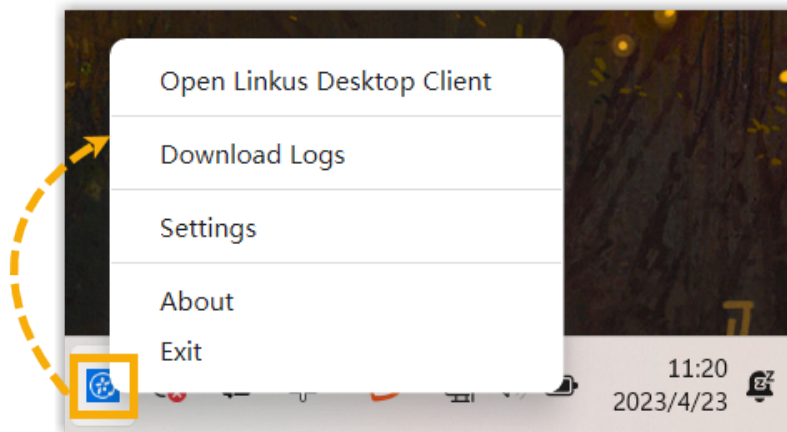

- **For macOS:** On the App menu, click **Linkus Desktop Client**.

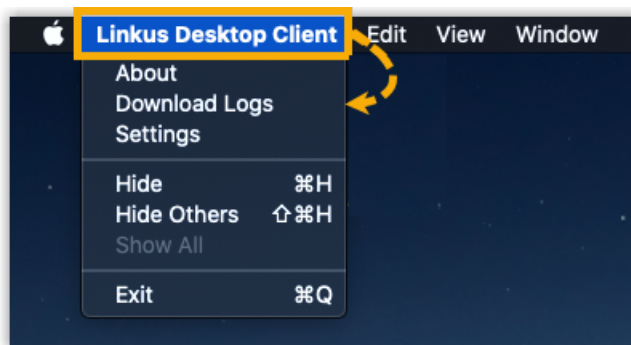

- b. Select **Download Logs** from the menu, then save the log file to your computer.
2. [Submit a ticket](#) to report the problem to Yeastar Support, and provide the debug logs.


# Extension Preferences

## User

### Update Your Extension Profile

This topic describes how to upload profile image and configure account information.

#### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > User > User Information**.
2. Click  to upload your profile image.

**Note:**

The image must be .jpg or .png, and can not exceed 1MB.

3. Configure your account information as needed.
  - **First Name**
  - **Last Name**
  - **Email Address:** You can receive voicemail messages and notifications for missed calls and password changes via the email address.
  - **Mobile Number:** You can receive calls via this mobile number.
4. Click **Save**.

### View Outbound Caller ID

Outbound Caller ID is the number and name that displayed on the callees' phone when you make outbound calls via specific trunks. This topic describes how to view Outbound Caller ID.

#### Scenario

You are a technical support, and use the trunk "Outbound\_US" to contact your customers. Your system administrator can set up a specific Outbound Caller ID Number (eg. 0592-5503301) and a specific Outbound Caller ID Name (eg. Yeastar Support) for this trunk. In this way, when you contact your customers via the trunk "Outbound\_US", the callees'

phone will display "Yeastar Support <0592-5503301>", so that they can verify the identity of the caller.

## Procedure

1. Log in to Linkus Desktop Client.
2. Go to **Preferences > User > Outbound Caller ID (DOD) > Outbound Caller IDs**.

## Result

The **Outbound Caller IDs** list displays the Outbound Caller ID Number, Outbound Caller ID Name, and associated trunk that system administrator has configured for you.

**Outbound Caller ID (DOD)**

Emergency Outbound Caller ID

**Outbound Caller IDs**

Outbound Caller ID	Outbound Caller ID Name	Trunk
0592-5503301	Yeastar Support	Outbound_US

## View Emergency Outbound Caller ID

This topic describes how to view Emergency Outbound Caller ID.

### Background information

Your company has purchased enhanced emergency service, and system administrator has associated your office extension with an exclusive Emergency Location Identification Number (ELIN, which is associated with your office location). When you place an emergency call by the extension, the emergency operator terminal will display your location.




**Note:**

You extension associated with ELIN should be registered on a corded IP desk phone.

## Procedure

1. Log in to Linkus Desktop Client.

2. Go to **Preferences > User > Outbound Caller ID (DOD) > Emergency Outbound Caller ID**.

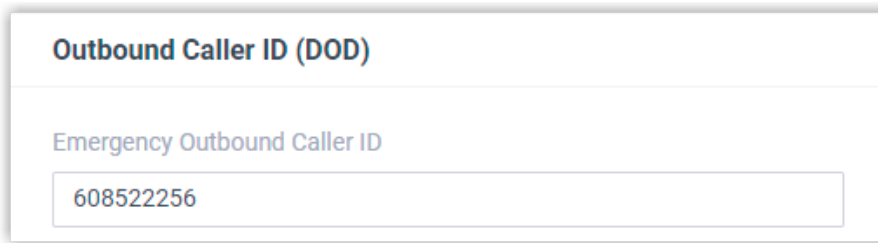

The screenshot shows a configuration window titled "Outbound Caller ID (DOD)". Inside the window, there is a section labeled "Emergency Outbound Caller ID" with a text input field containing the number "608522256".

## Result







When you place an emergency call, the Public Safety Answering Point (PSAP) will pinpoint your location via ELIN, and arrange appropriate emergency response.

# Presence

## Configure Presence Settings

Linkus provides different presence statuses to let your colleagues know if you are currently available. This topic introduces the types of presence statuses and the presence settings.

Linkus provides the following presence statuses.

-  Available
-  Away
-  Business Trip
-  Do Not Disturb
-  Lunch Break
-  Off Work

You can go to **Preferences > Presence**, select a presence status and configure the following settings differently. When your presence status changes, the presence settings will change accordingly.




## Presence Information

Setting	Description
Presence Information	Add a note to the current presence.

## Call Forwarding

Call forwarding rules help you forward incoming calls to a specific destination when you are unavailable.

Setting	Description
Types of incoming calls	<p>Select a call type.</p> <ul style="list-style-type: none"> <li>• <b>Internal Calls:</b> Set a call forwarding rule for incoming calls from your colleagues.</li> <li>• <b>External Calls:</b> Set a call forwarding rule for incoming calls from external users.</li> </ul>
Forwarding condition	<p>Turn on the switch of a forwarding condition, then configure a destination.</p> <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-top: 10px;"> <p> <b>Note:</b> <b>Do Not Disturb</b> presence only supports the option <b>Always</b>.</p> </div> <ul style="list-style-type: none"> <li>• <b>Always:</b> Forward all incoming calls to the designated destination.</li> <li>• <b>No Answer:</b> Only forward unanswered calls to the designated destination.</li> <li>• <b>When Busy:</b> Only forward the calls that come in while you are talking on the phone to the designated destination.</li> </ul>

## Ring Strategy

Ring strategy allows you to decide in which order incoming calls are distributed to the endpoints where your extension is registered.



**Note:**

**Do Not Disturb** presence does not support this setting.

- **Extension Endpoint:** The IP phone, analog phone, or softphone where your extension is registered.
- **Linkus Mobile Client**

- **Linkus Desktop Client** (Softphone only)
- **Linkus Web Client** (Web Client Mode only)

Setting	Description
Ring First	Set which endpoint(s) will ring first when a call reaches your extension.
Ring Secondly	Set which endpoint(s) will ring if the incoming call is not answered on the endpoints that are selected as <b>Ring First</b> .

## Ring Timeout


To prevent callers from waiting for a long time, you can configure ring timeout. If a call is not answered during the time period, it will be routed to the destination of **No Answer**.



### Note:

**Do Not Disturb** presence does not support this setting.

Setting	Description
Ring Timeout(s)	Set the timeout period.



**Note:**  
The valid range is from 5 to 300 seconds.

## Ring the Mobile Number Simultaneously


To simultaneously ring both extension and the associated mobile number when anyone calls in your extension number, you can configure a simultaneous ring strategy.





### Note:

**Do Not Disturb** presence does not support this setting.

Setting	Description
Ring Mobile Number Simultaneously	Check the option to enable this feature.



**Tip:**  
Click  to configure your mobile number.

Setting	Description
Prefix	<p>Enter the prefix of outbound route so that PBX server can successfully send calls out.</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <b>Note:</b> Contact system administrator to check if a prefix is required. </div>


## Accept Push Notifications

By default, you can receive push notifications on Linkus Mobile Client anywhere and any-time, such as missed calls, new voicemail messages and so on. If you don't want to receive notifications after work, you can disable the feature.

Setting	Description
Accept Push Notifications	Enable or disable push notifications on Linkus Mobile Client.

## Agent Status Auto Switch

If you are a dynamic agent who needs to frequently log in to or out of a queue, you can associate your queue status with your extension presence. Your status in a queue will automatically change along with your extension presence.

Setting	Description
Log In	<p>Log in to a queue.</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;">  <b>Note:</b> The option is available ONLY in <b>Available</b> status. </div>
Log Out	Log out of a queue.
Pause	Pause receiving queue calls, and select a specific pause reason as needed.
Do Nothing	Retain current status.

### Related information

[Manually Switch Presence Status](#)


[Automatically Switch Presence Status Based on Business Hours and Holidays](#)

## Manually Switch Presence Status

This topic describes how to manually switch your current presence status to a new one, including fixed status and temporary status.

### Switch presence status to a fixed status

1. Log in to Linkus Desktop Client.
2. In the top pane, select a presence status from the drop-down list of presence.

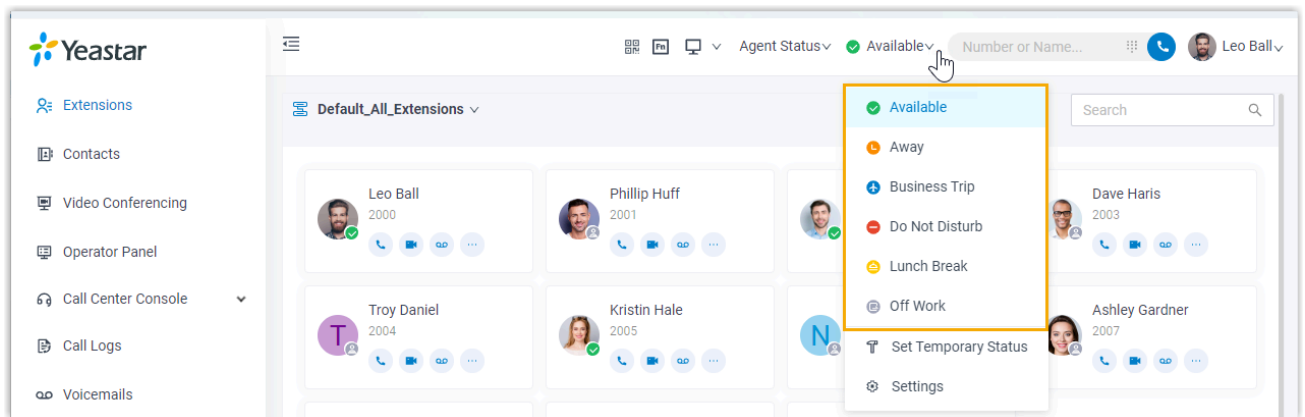


The presence status and the relevant [presence settings](#) take effect.

### Switch presence status to a temporary status

Assume that you would be away for a scheduled meeting during which you are unavailable to answer calls, but you want calls to be forwarded to the previous destination when you are available. In case you forget to change presence status, you can switch presence to a temporary status, and set how long the status will last.

1. Log in to Linkus Desktop Client.
2. In the top pane, select **Set Temporary Status** from the drop-down list of presence.

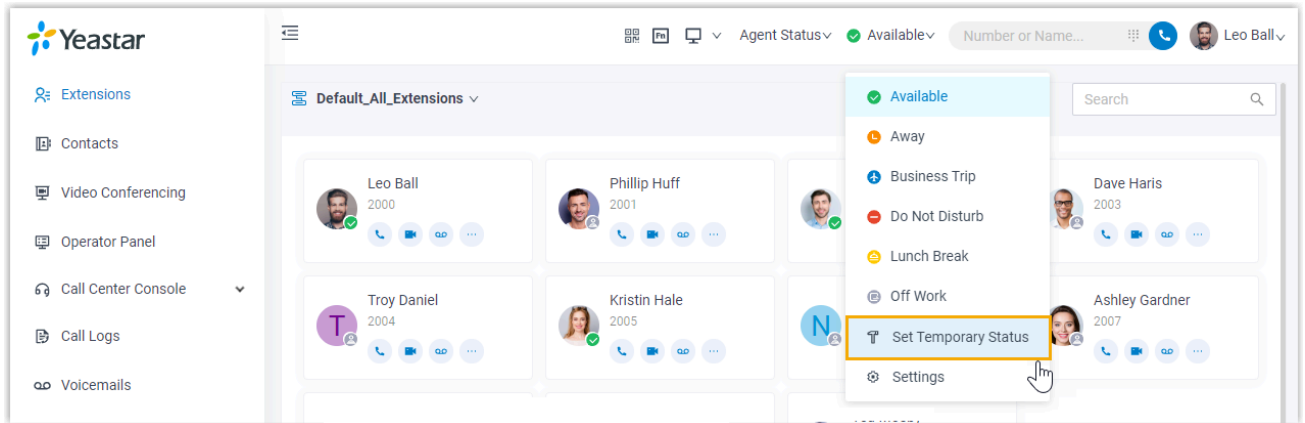

3. In the pop-up window, configure the following settings:
  - a. In the **Change Status To** drop-down list, select a temporary status.
  - b. In the **Hour** and **Minute** drop-down list, set how long the temporary status will last.
  - c. **Optional:** In the **Set Status Message** field, add a note to the temporary status.
4. Click **Save**.  
The presence status and the relevant [presence settings](#) take effect.



**Tip:**

In the top pane, you can hover your mouse over the presence to check when will the temporary status ends. When the time is up, presence status and relevant settings would be switched back to the previous one.

**Related information**

[Automatically Switch Presence Status Based on Business Hours and Holidays](#)

## Automatically Switch Presence Status Based on Business Hours and Holidays

You can configure different presence status based on business hours and holidays. In this way, the extension presence will automatically switch to the preset status based on the time.

**Requirement**

System administrator has set up business hours and holidays.

## Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Features**.
2. In the **Time-conditional Presence Auto Switch** section, specify a presence status to be displayed for the desired time.

The screenshot shows a settings panel titled "Time-conditional Presence Auto Switch". It is divided into four sections, each with a dropdown menu:

- Business Hours:** Available
- Break Hours:** Lunch Break
- Holidays:** Do Not Disturb
- Outside Business Hours:** Off Work

3. Click **Save**.

## Result

Presence status will be switched automatically according to the business hours and holidays.

For example, the system administrator has set the Break Hours as 12:00-14:00, and you have selected **Lunch Break** for Break Hours. Then Linkus will automatically switch your presence status to **Lunch Break** during 12:00-14:00.

### Related information

[Manually Switch Presence Status](#)

## Voicemail

### Customize Your Voicemail Settings

This topic describes how to customize your voicemail settings, including voicemail access PIN, new voicemail notification, voicemail play options, and voicemail greetings.

## Procedure


1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. Turn on the option **Enable Voicemail**.

3. In the **Voicemail PIN Authentication** drop-down list, decide whether a PIN is required when you access voicemail.
  - **Enabled:** You need to enter a PIN to access your voicemail messages.  
You can set the PIN number in the **Voicemail Access PIN** field.
  - **Disabled:** You can access your voicemail messages directly.
4. In the **New Voicemail Notification** drop-down list, decide whether to receive email notification for new voicemails.
  - To disable email notifications, select **Do Not Send Email Notifications**.
  - To enable email notifications, select one of the following options:
    - **Send Email Notifications with Attachment:** Send a notification email with the new voicemail message attached as a `.wav` file.
    - **Send Email Notifications without Attachment:** Send notification emails only.
5. If you enabled email notifications, configure the following settings as needed:


Setting	Description
After Notification	Decide how to deal with voicemails after notification emails are sent out. <ul style="list-style-type: none"> <li>• <b>Mark as Read:</b> Mark the voicemail message in mailbox as read.</li> <li>• <b>Delete Voicemail:</b> Delete the voicemail messages from mailbox.</li> <li>• <b>Do Nothing:</b> Keep the voicemail message in mailbox as unread.</li> </ul>
Send to	Specify the email address for receiving notification emails. <ul style="list-style-type: none"> <li>• <b>User Email:</b> Send notification emails to your email address.</li> <li>• <b>Custom Email:</b> Send notification emails to a custom email address.</li> </ul> <p>Enter the desired email address in the <b>Custom Email Address</b> field.</p>

6. **Optional:** Set whether to play the following messages when playing a voicemail.
  - **Play Date and Time**
  - **Play Caller ID**
  - **Play Message Duration**
7. In the **Voicemail Greeting** section, decide which greeting will be played to callers when they reach your mailbox.

By default, the system greeting is your default greeting, you can [upload or record custom voicemail greetings](#) and set it as the new default greeting.

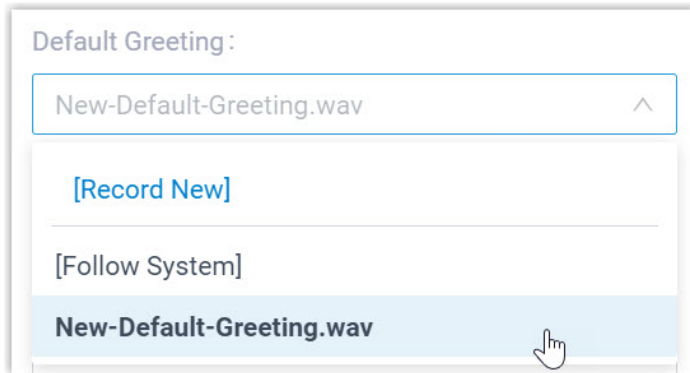**Note:**

If you want to play specific greetings based on your presence status, select an existing one from the corresponding drop-down list.

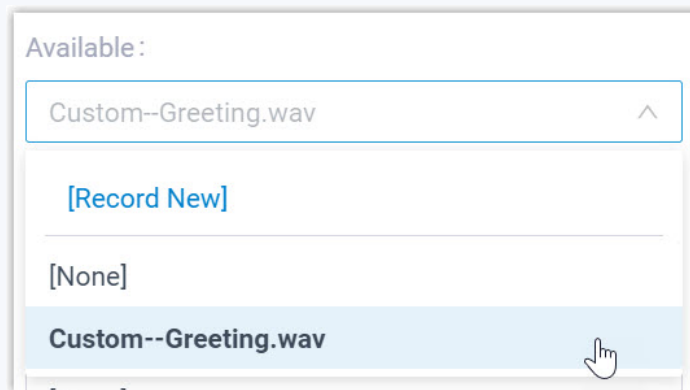

8. Click **Save**.

## Upload or Record Voicemail Greetings

Voicemail greetings are played to callers when they reach your mailbox. This topic describes how to upload or record your personal voicemail greetings.

### Restrictions

Up to 10 custom voicemail greetings are supported.

### Upload a voicemail greeting

#### Prerequisites


Prepare an audio file, which must meet the following requirements:



- **File format:** .wav, .mp3, Or .gsm
  - PCM, 8K, 16bit, 128kbps
  - A-law(g.711), 8k, 8bit, 64kbps
  - u-law(g.711), 8k, 8bit, 64kbps
- **File size:** Up to 8 MB

## Procedure


1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. In the **Voicemail Greeting** section, click **Greeting Management**.

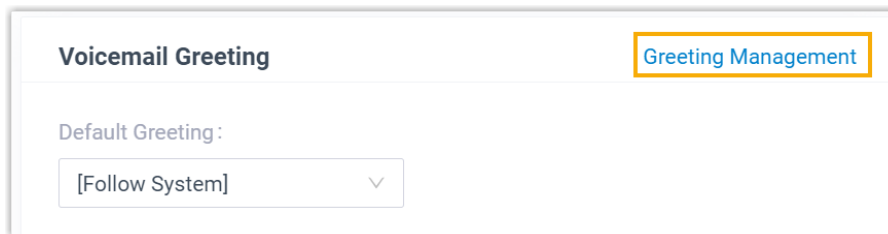

3. In the pop-up window, click **Upload**.
4. Select an audio file to upload.

## Result


- The uploaded greeting is displayed in the **Greeting Management** tab.
- You can set this greeting as the default greeting or the presence greeting by selecting it from the corresponding drop-down list.

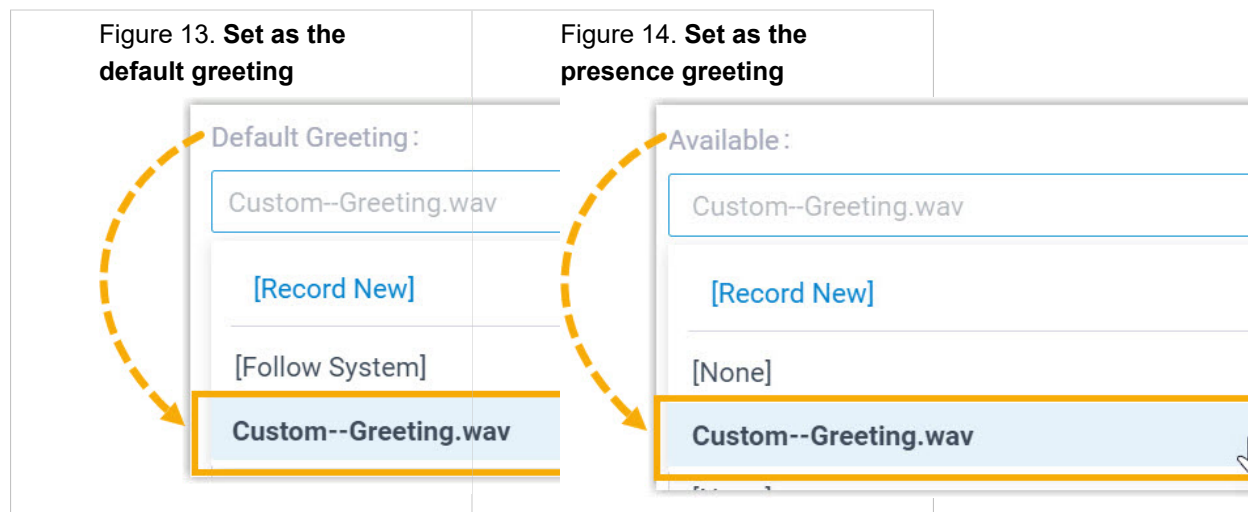

## Record a voicemail greeting

### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. In the **Voicemail Greeting** section, click **Greeting Management**.

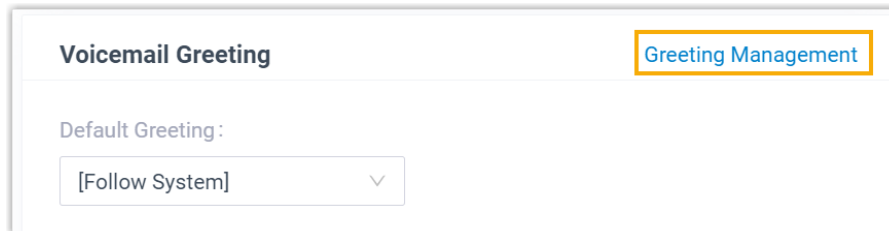


3. In the pop-up window, click **Record New Greeting** tab, and configure the following settings:
  - a. In the **Audio File Name** field, enter a name to help you identify it.
  - b. In the **Extension** drop-down list, select your extension to record a greeting.
  - c. Click **Confirm**.

The system places a call to your extension.
4. Answer the call, then record your greeting, and hang up after you finish recording.

### Result

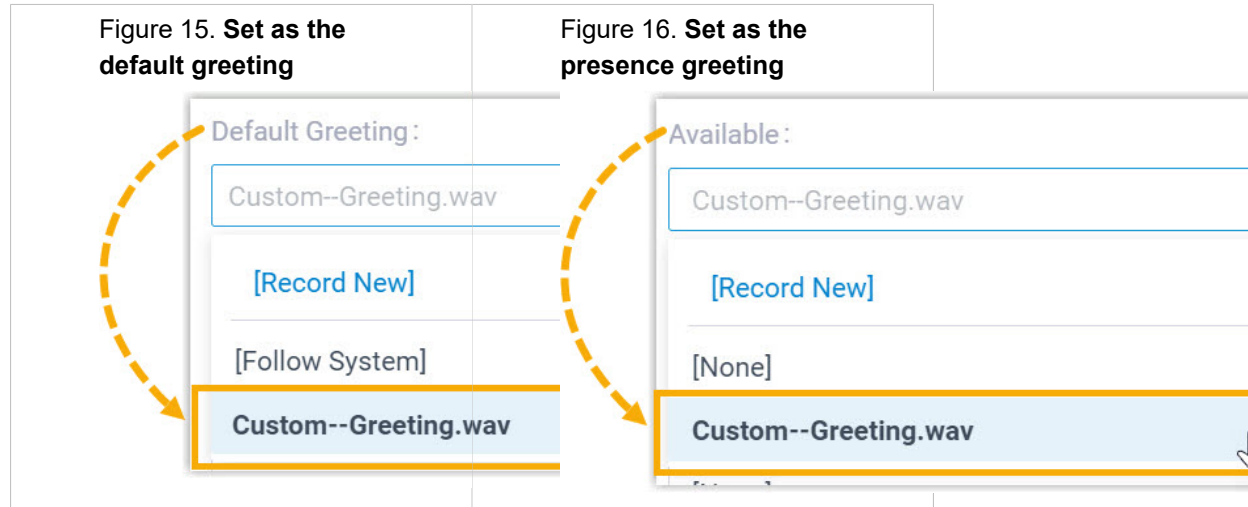

- The recorded greeting is displayed in the **Greeting Management** tab.
- You can set this greeting as the default greeting or the presence greeting by selecting it from the corresponding drop-down list.




## Manage Personal Voicemail Greetings

This topic describes how to manage your voicemail greeting, including playing, downloading, and deleting greetings.


### Play a voicemail greeting

1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. In the **Voicemail Greeting** section, click **Greeting Management**.
3. Select the greeting that you want to play, click .
4. In the pop-up window, choose how to play the greeting:
  - **Play on Web:** Click  to play the greeting on the Linkus Desktop Client directly.
  - **Play to Extension:** Play the greeting on your phone.
    - a. Select your extension, and click **Play**.  
The system places a call to your extension.
    - b. Pick up the call to listen to the greeting on the phone.

### Download a voicemail greeting

1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. In the **Voicemail Greeting** section, click **Greeting Management**.
3. Select the greeting that you want to download, click .

## Delete voicemail greetings

1. Log in to Linkus Desktop Client, go to **Preferences > Voicemail**.
2. In the **Voicemail Greeting** section, click **Greeting Management**.
3. Delete one or more greetings according to your needs.
  - To delete a greeting, click  beside the greeting and click **OK**.
  - To delete greetings in bulk, select the desired greetings and click **Delete**, then click **OK**.


## Audio and Video

### Configure Audio and Video Devices

This topic describes how to select the desired audio device and video device for your Linkus Desktop Client.

### Prerequisites

Linkus Desktop Client is in **Desktop Client** mode.

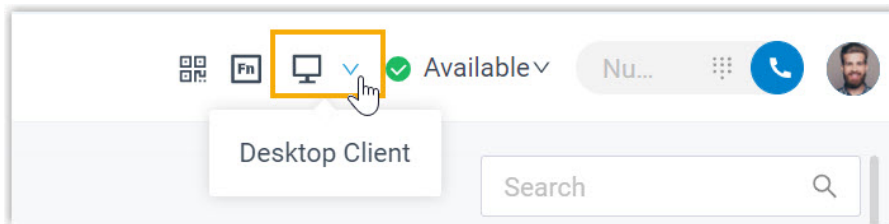


### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Audio & Video**.
2. In the **Multimedia Device** section, select desired device from the drop-down list of **Camera, Microphone, Speaker, and Ringing Device**.



#### Important:

Video device requires the subscription to Ultimate Plan (UP) of your organization's server.

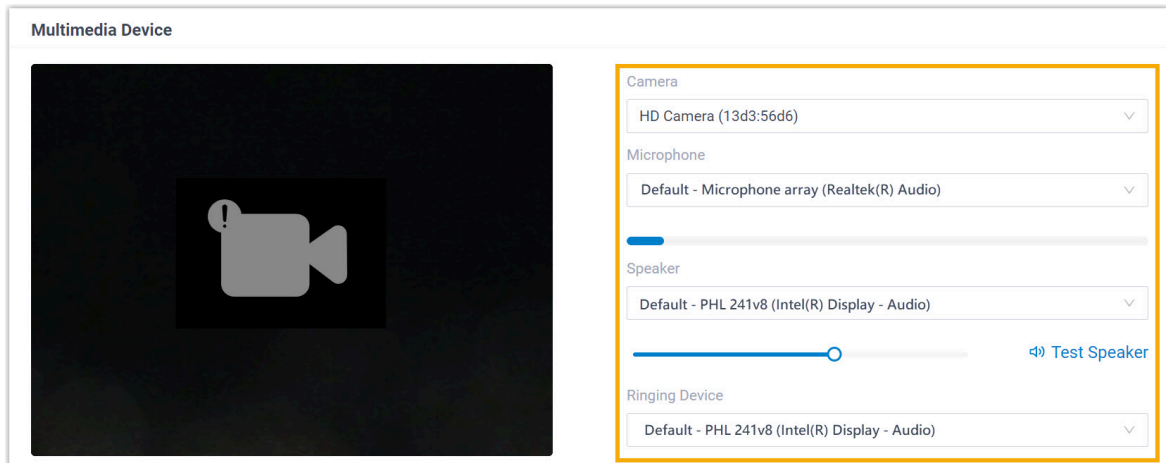

3. If you have a headset compatible with Linkus Desktop Client, you can set up the headset to work with Linkus Desktop Client in the **Headset Integration** section. In this way, you can control Linkus calls directly from the headset.

For the compatible headsets and the integration instructions, see [Integrate HID-compliant Headsets with Linkus Desktop Client](#).

4. Click **Save**.


## Integrate HID-compliant Headsets with Linkus Desktop Client


If you have a **HID-compliant headset** on hand, you can set up the HID-compliant headset as the audio device for Linkus Desktop Client, so as to control Linkus calls via the headset.

### Requirement

**Supported headset type:** USB HID headset (Jabra, Yealink, EPOS, Poly, and more)


### Procedure

1. Make sure that Linkus Desktop Client is in **Desktop Client** mode, or you can NOT set up the HID-compliant headset as the audio device.
  - a. Log in to Linkus Desktop Client.
  - b. At the toolbar, check if  is displayed.




If not, select **Desktop Client** from the drop-down list.

2. Connect the HID-compliant headset to the USB port of your computer.
3. Go to **Preferences > Audio & Video > Headset Integration**, set the headset as the audio device.
  - a. In the drop-down list, select the connected HID-compliant headset.

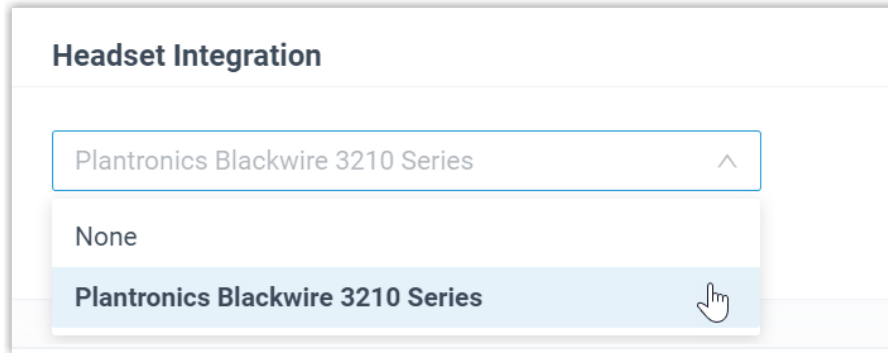

- b. Click **Connect Headset**.

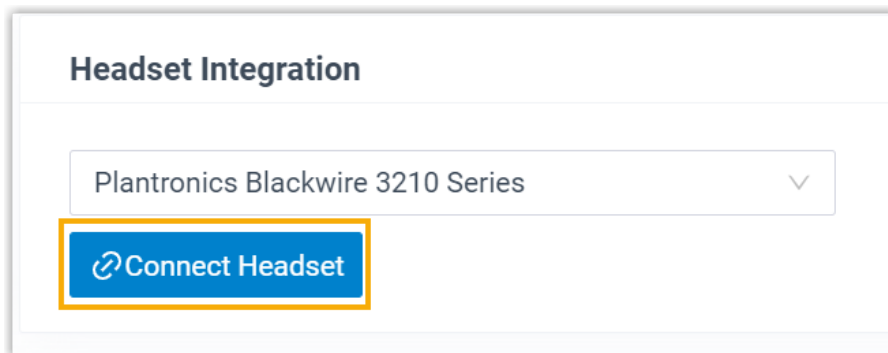

4. Click **Save**.

## Result


You can use the HID-compliant headset to handle calls. The supported call operations are as follows:

- Answer/Reject a call
- Answer/Reject a second call
- End a call
- Hold/Resume a call
- Mute/Unmute a call
- Adjust system volume

 **Tip:**



In case you want to change the connected headset, select another connected HID-compliant headset and click **Connect Headset**.

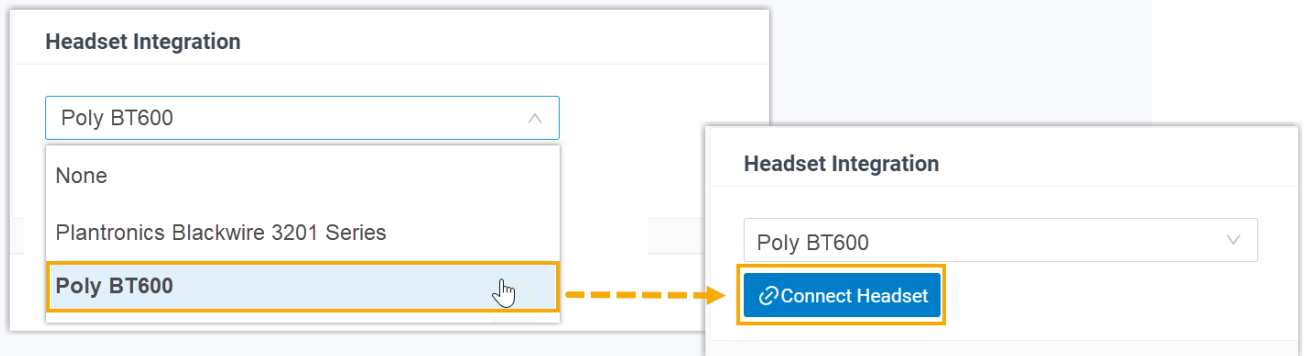


## Email Notification

### Enable Email Notifications for Missed Calls and Password Changes

This topic describes how to enable email notifications for missed calls and password changes.

#### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Features**.
2. In the **Notifications** section, select the desired checkbox to decide which notifications you want to receive.

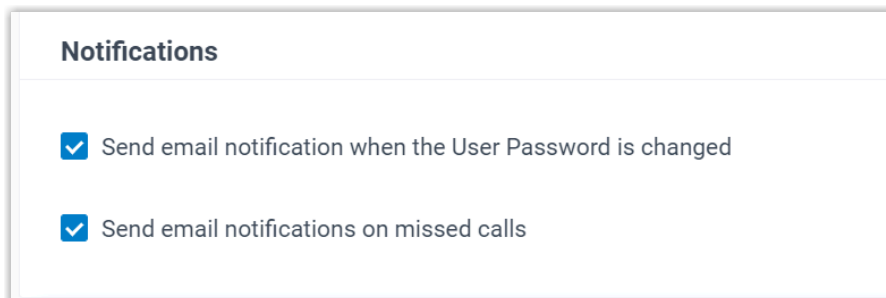

3. Click **Save**.

## Result

When the corresponding event occurs, the system will send relevant notifications to your email address.

# Call

## Handle Incoming Calls Based on Caller ID

This topic describes how to create a call handling rule to handle incoming calls based on incoming Caller ID.

### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Features > Call Handling Based on Caller ID**.
2. Click **Add** to set up a call handling rule.
  - a. In the **Caller ID** field, enter a specific number or a number pattern.
    - To apply the rule to a specific number, enter a specific number.  
For example, enter 10086 to handle incoming calls with Caller ID 10086 based on the rule.
    - To apply the rule to a number pattern, enter a wildcard pattern.  
For example, enter 9011. to handle incoming calls with any Caller ID starting with 9011 based on the rule.  
For more information, see [Caller ID Pattern](#).
  - b. In the **Action** drop-down list, set how you want to deal with incoming calls with the Caller ID.
    - **Hang Up**
    - **Extension**
    - **Voicemail**
    - **IVR**
    - **Play Greeting then Hang up**
    - **Accept Call**



**Note:**





By default, all incoming calls are allowed to reach your extension. If there is a call-handling rule to prevent spam calls (eg.728373XX) from reaching your extension, but you want to accept calls from a specific number (eg.72837300), you can create another rule to accept calls from 72837300.

- c. Click **Confirm**.
3. **Optional:** To add more rules, repeat **step 2**.
4. **Optional:** In the **Move** column, adjust the rules' order. The rules take effect from the top down.



**Note:**

For example, set the rule "Accept calls from 72837300" to a higher priority than the rule "Reject calls from numbers starting with 728373". In this way, when receiving calls from 72837300, the system will send calls to your extension. For other incoming calls from number starting with 728373, the system will hang up directly.

5. Click **Save**.

## Result


The call handling rules take effect immediately. When an incoming call reaches your extension, PBX will handle the call based on Caller ID accordingly.

## Stop Rejected Calls from Ringing Other Endpoints

If your extension has been registered on multiple endpoints, when you reject an incoming call on one of the endpoints, the call keeps ringing all the other endpoints. In this case, you can set up your extension to stop rejected calls from ringing other endpoints.

## Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Features**.
2. In the **Call** section, select the checkbox of **All Reject Mode for Endpoints**.

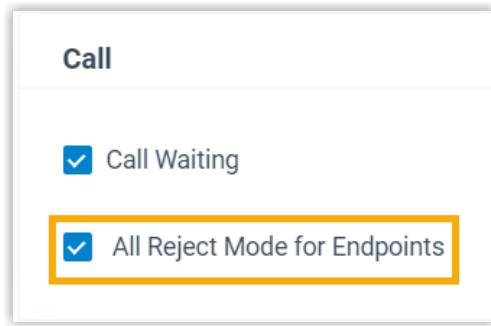

3. Click **Save**.

## Result

When you reject an incoming call on an endpoint, the other endpoints will stop ringing. The call will be routed to the preset **When Busy** destination (Path: **Preferences > Presence > Call Forwarding**).

## Popup URL

### Set up Third-party Integration for Call Popup

Yeastar Popup URL allows a lightweight integration with a third-party application (such as CRM system, ERP system, etc.) to achieve call popup. When your extension receive a call, the server calls the URL of the third-party application and retrieves relevant customer data to display on the pop-up web page.

## Requirements

### Third-party application:

- Web-based.
- Support to provide a URL that can identify callers via Caller ID and Caller ID Name.

## Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Features**.
2. Turn on the option **Popup URL**.
3. Set up third-party integration via Popup URL.

Setting	Description
Popup URL	<p>Enter the third-party URL, followed by the variables that you want to pass.</p> <p><b>Supported variables:</b></p> <ul style="list-style-type: none"> <li>• <code>\$.CallerNumber</code>: Incoming Caller ID.</li> <li>• <code>\$.CallerDisplayName</code>: Incoming Caller ID Name.</li> </ul> <p>Take Solve360 CRM as an example:  <a href="https://web.solve.360.com/\$.CallerNumber&amp;\$.CallerDisplayName">https://web.solve.360.com/\$.CallerNumber&amp;\$.CallerDisplayName</a></p>
Communication Type	<p>Select which types of calls will trigger the call popup.</p> <ul style="list-style-type: none"> <li>• <b>Inbound</b>: Inbound calls from external users.</li> <li>• <b>Internal</b>: Internal calls from colleagues.</li> </ul>
Trigger Event	<p>Set when the call popup will be automatically triggered.</p> <ul style="list-style-type: none"> <li>• <b>Ringng</b>: An incoming call reaches.</li> <li>• <b>Answered</b>: An incoming call is answered.</li> <li>• <b>Call End</b>: An incoming call is ended.</li> </ul>


4. Click **Save**.

## Result

When an incoming call reaches your extension, a pop-up screen automatically appears in your web browser and displays relevant customer data.

### ! Important:

For the first-time use, you need to allow pop-ups and redirection in your browser, or the pop-up screen can NOT be opened automatically.

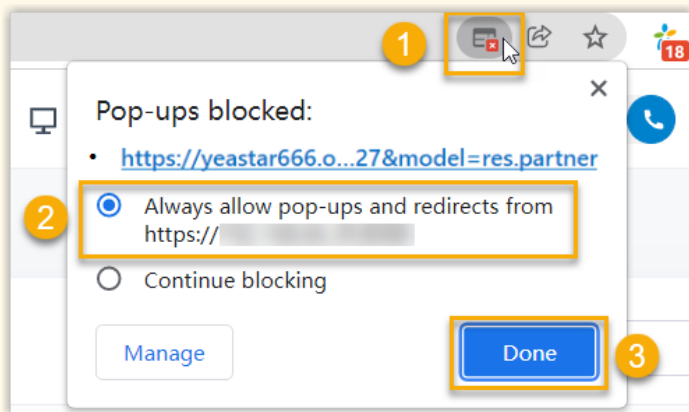

# Function Key

## Configure Function Keys

Function keys allow you to monitor status of specific objects or quickly perform specific operations. This topic describes how to configure function keys on Linkus Desktop Client.

### Applications and limitations

Refer to the following table for the endpoints where function keys can be applied and the supported number of function keys for each endpoint.

Supported Endpoint	Max. Number of Function Keys
Linkus Desktop Client	120
Linkus Web Client	
Yeastar Linkus for Google	
IP phones that support Auto Provisioning	Depend on how many line keys your phone supports.

### Procedure

1. Log in to Linkus Desktop Client, go to **Preferences > Function Keys**.
2. Configure function keys according to your needs.

Function Key	Type	Value	Label	Operations	Sort
Key 1	Speed Dial	2008-Jaime Hart	Jaime Hart		
Key 2	Check Voicemail	2000-Leo Ball	VM-Leo Ball		
Key 3	Agent Login/Logout	6400	Login/Logout		
Key 4	Agent Pause/Unpause	6400	Pause/Unpause		

- **Type:** Select a key type.



#### Tip:


For the supported key types, see [the table](#).


- **Value:** Configure a desired value based on the key type.
- **Label:** Optional. Enter a value to help you identify the function key.

### 3. Click **Save**.

## Result

- The function keys are applied to **Linkus Desktop Client**, **Linkus Web Client**, and **Yeastar Linkus for Google**.

You can click  at the top tool bar to bring up a mini panel, on which you can monitor status of specific objects or quickly perform specific operations via function keys.

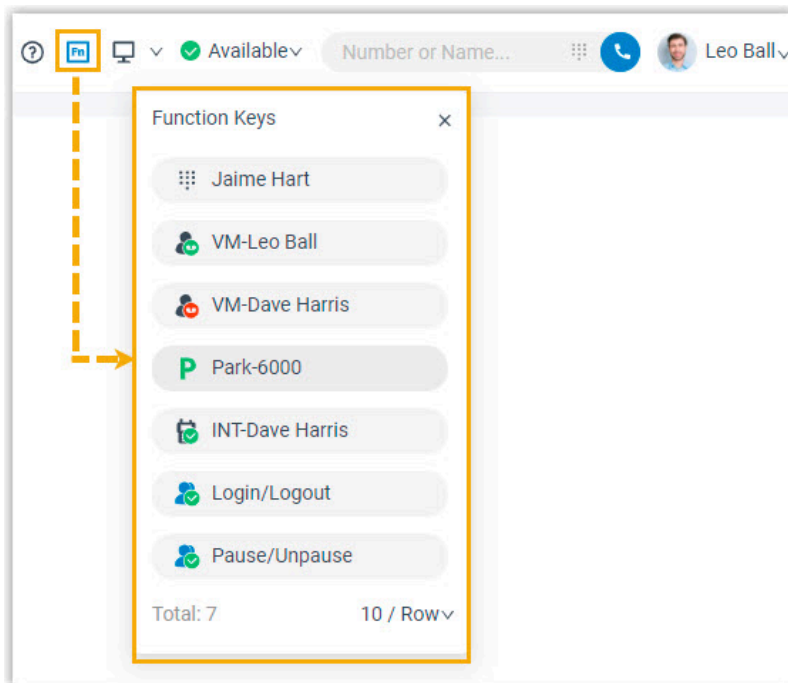

- If you have registered your extension on an IP phone via Auto Provisioning, the phone also automatically applies the changes.














#### **Note:**
















For IP phones, the number of programmable function keys depends on how many line keys your phone supports. If the number of function keys you assign exceeds the number of programmable keys supported by your phone, the redundant keys cannot take effect.















## Types of function keys

Key Type	Function	Icon & Description
N/A	No functionality.	<ul style="list-style-type: none"> <li>: The function key provides no functionality until configuration.</li> </ul>
Line	Configure line keys for IP phone.	<ul style="list-style-type: none"> <li>: The key type <b>Line</b> is only available for IP phones.</li> </ul>
BLF	Monitor the status of a specific extension.	<ul style="list-style-type: none"> <li>: The monitored extension is unregistered.</li> <li>: The monitored extension is online and ready for communication.</li> <li>: The monitored extension is away from desk.</li> <li>: The monitored extension doesn't want to be disturbed, and won't receive any calls.</li> <li>: The monitored extension is currently on lunch break.</li> <li>: The monitored extension is on a business trip.</li> <li>: The monitored extension is currently off work.</li> <li>: The monitored extension receives a call.</li> </ul> <div style="border: 1px solid #007bff; padding: 5px; margin-top: 10px;"> <p> <b>Tip:</b> To pick up the incoming call to the extension on Linkus Desktop Client, hover your mouse over the function key, then click the desired incoming call.</p> </div>

Key Type	Function	Icon & Description
		<div data-bbox="862 260 1386 596"> </div> <ul style="list-style-type: none"> <li>: The monitored extension is in a call.</li> <li>: The monitored extension is held in a call.</li> </ul> <div data-bbox="808 751 1386 890"> <p><b>Note:</b> The function key doesn't work in an audio conference call.</p> </div>
Speed Dial	Speed dial a number.	<ul style="list-style-type: none"> <li>: Click the icon to place a call to the most commonly dialed numbers or extensions.</li> </ul>
Check Voicemail	<ul style="list-style-type: none"> <li>Monitor the status of voicemail.</li> <li>Check voicemail messages.</li> </ul>	<ul style="list-style-type: none"> <li>: The monitored extension is deleted.</li> <li>: All the voicemails of the monitored extension are read.</li> <li>: There are unread voicemails for the monitored extension.</li> </ul> <div data-bbox="862 1304 1386 1520"> <p><b>Tip:</b> To check the voicemail messages on Linkus Desktop Client, click the icon, then enter the voicemail PIN code as prompts.</p> </div>
Check Group Voicemail	<ul style="list-style-type: none"> <li>Monitor the status of group voicemail in shared mode.</li> <li>Check group voicemail messages.</li> </ul>	<ul style="list-style-type: none"> <li>: The monitored group voicemail is deleted.</li> <li>: All the voicemails of the monitored group voicemail are read.</li> <li>: There are unread voicemails for the monitored group voicemail.</li> </ul> <div data-bbox="862 1843 1386 1898"> <p><b>Tip:</b></p> </div>

Key Type	Function	Icon & Description
		<ul style="list-style-type: none"> <li> To check the group voicemail messages on Linkus Desktop Client, click the icon, then enter the group voicemail PIN code as prompts.</li> </ul>
Park & Retrieve	<ul style="list-style-type: none"> <li>• Monitor the status of a specific parking number.</li> <li>• Park a call on a specific parking number.</li> <li>• Retrieve a parked call from a specific parking number.</li> </ul>	<ul style="list-style-type: none"> <li>•  : The parking number is invalid.</li> <li>•  : The parking number is available.</li> </ul> <p> <b>Tip:</b> You can click the icon to park the current call on the parking number.</p> <ul style="list-style-type: none"> <li>•  : The parking number is occupied.</li> </ul> <p> <b>Tip:</b> You can click the icon to retrieve the call.</p> <p> <b>Note:</b> The function key doesn't work in an audio conference call.</p>
Intercom	<ul style="list-style-type: none"> <li>• Monitor the status of a specific extension.</li> <li>• Place an intercom call to the monitored extension to make an announcement.</li> </ul>	<ul style="list-style-type: none"> <li>•  : The monitored extension is unregistered.</li> <li>•  : The monitored extension is available.</li> <li>•  : The monitored extension receives a call.</li> <li>•  : The monitored extension is in a call.</li> </ul>
DTMF	Send DTMF signals directly instead of manually entering the numbers each time.	<ul style="list-style-type: none"> <li>•  : During a call, click the icon to send DTMF signals.</li> </ul> <p> <b>Note:</b> The function key doesn't work in an audio conference call.</p>
Agent Login/Logout	<ul style="list-style-type: none"> <li>• Monitor login status in a specific queue.</li> <li>• Log in to or log out of a specific queue.</li> </ul>	<ul style="list-style-type: none"> <li>•  : Not a member in a specific queue.</li> <li>•  : Log in to a specific queue.</li> </ul>



Key Type	Function	Icon & Description
Agent Pause/Unpause	<ul style="list-style-type: none"> <li>• Monitor service status in a specific queue.</li> <li>• Pause or unpause receiving a call from a specific queue.</li> </ul>	<ul style="list-style-type: none"> <li>• : Log out of a specific queue.</li> <li>• : Resume service in a queue.</li> <li>• : Pause service in a queue.</li> <li>• : Not a member in a specific queue.</li> <li>• : Not logged in to a specific queue.</li> </ul>
LDAP Directory	Quickly access the LDAP phonebook to query contact information on IP phones.	<ul style="list-style-type: none"> <li>• : The key type <b>LDAP Directory</b> is only available for IP phones.</li> </ul>
Boss-Secretary Feature	Monitor the call status of your boss or secretary.	<ul style="list-style-type: none"> <li>• As a boss, you can monitor your secretary's call status: <ul style="list-style-type: none"> <li>◦ : The secretary is NOT handling any calls for you.</li> <li>◦ : The secretary is answering calls for you.</li> <li>◦ : The secretary is putting a call on hold, waiting for you to answer.</li> </ul> </li> <li>• As a secretary, you can monitor your boss's call status: <ul style="list-style-type: none"> <li>◦ : The boss is NOT holding any calls for you to resume.</li> <li>◦ : The boss is putting a call on hold, waiting for you to resume.</li> </ul> </li> </ul>
Call Forwarding	Quickly enable or disable call forwarding for the IP phone.	<ul style="list-style-type: none"> <li>• : The key type <b>Call Forwarding</b> is only available for IP phones.</li> </ul>

# Integration

## Microsoft Outlook Integration

### Microsoft Outlook Integration Overview

Linkus Desktop Client supports to integrate with Outlook for Windows, which allows you to make phone calls to your Outlook contacts right from Outlook through Linkus Desktop Client. This topic describes the requirements and key features of Microsoft Outlook integration.

**Important:**

**Linkus macOS Desktop** does NOT support integration with Microsoft Outlook.

### Requirements

Ensure that your Microsoft Outlook meets the following requirements:

- **Client:** Outlook for Windows
- **Version:** Outlook 2016 or later
- **Operating System:** Windows 10, Windows 11

### Key features

The integration of Linkus Desktop Client and Outlook provides the following key features:

#### Make Calls in Outlook

Launch phone calls to your Outlook contacts directly from Outlook through Linkus Desktop Client.

#### Call Popup

Automatically bring up the contact's profile on Outlook when you receive an inbound call from an Outlook contact through Linkus Desktop Client.

#### Call Journal

All the call activities get logged automatically to Outlook when you end calls with Outlook contacts through Linkus Desktop Client.

#### Automatic Contact Creation

Automatically pop up the contact creation page on Outlook when you receive or make calls with an unknown number that doesn't match an Outlook contact.

### Related information

[Integrate Linkus Desktop Client with Outlook for Windows](#)

[Use Microsoft Outlook Integration](#)

[Disable Microsoft Outlook Integration](#)

## Integrate Linkus Desktop Client with Outlook for Windows

This topic describes how to integrate Linkus Desktop Client with Outlook for Windows.



### Important:

**Linkus macOS Desktop** does NOT support integration with Microsoft Outlook.


## Requirements

Ensure that your Microsoft Outlook meets the following requirements:

- **Client:** Outlook for Windows
- **Version:** Outlook 2016 or later
- **Operating System:** Windows 10, Windows 11

## Step 1. Set up Outlook integration on Linkus Desktop Client

1. Log in to Linkus Desktop Client, go to **Preferences > Integration**.
2. Turn on the switch of **Enable Outlook Integration**.



3. Set up automatic contact creation and call logs synchronization as needed.


Feature	Instruction
Automatic Contact Creation	<p>With automatic contact creation set up, Outlook will automatically pop up the contact creation page when you receive or make calls with an unknown number that doesn't match an Outlook contact.</p> <ol style="list-style-type: none"> <li>a. Select the checkbox of <b>Create New Contacts Automatically</b>.</li> <li>b. In the <b>Call Types to Auto-create Contacts</b> drop-down list, select when will Outlook pop up the contact creation page.</li> </ol>

Feature	Instruction
	<ul style="list-style-type: none"> <li>• <b>Inbound:</b> Inbound call from an unknown number that doesn't match an Outlook contact.</li> <li>• <b>Outbound:</b> Outbound call to an unknown number that doesn't match an Outlook contact.</li> </ul>
Call Logs Synchronization	<p>With call logs synchronization enabled, all the call histories with your Outlook contacts will be synchronized to Outlook.</p> <p>To enable call log synchronization, select the checkbox of <b>Synchronize Call Logs Automatically</b>.</p>


4. Click **Save**.

## Step 2. Activate Linkus add-in on Outlook


1. Open or restart Outlook, go to **File > Options**.

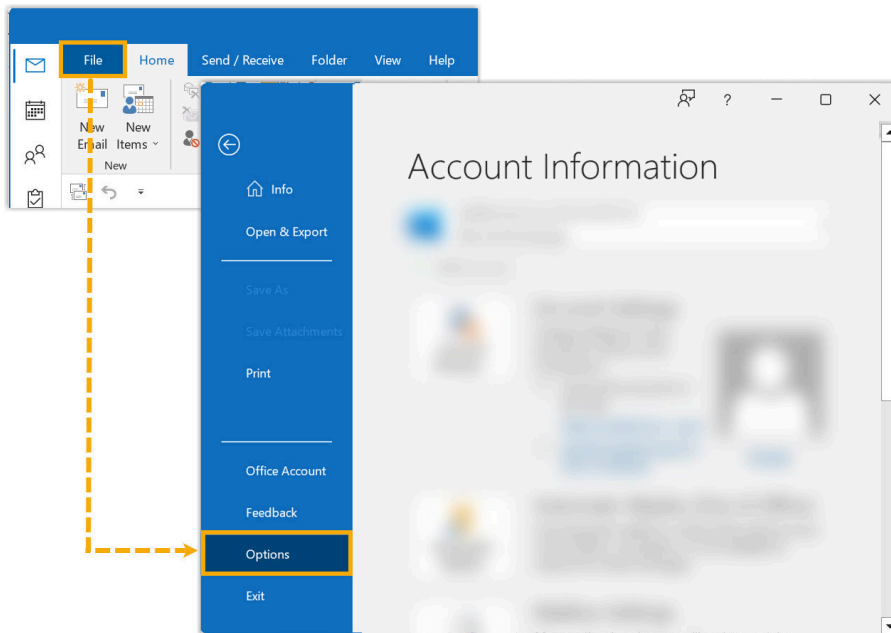

2. In the pop-up window, click **Add-ins** and click **Go...**

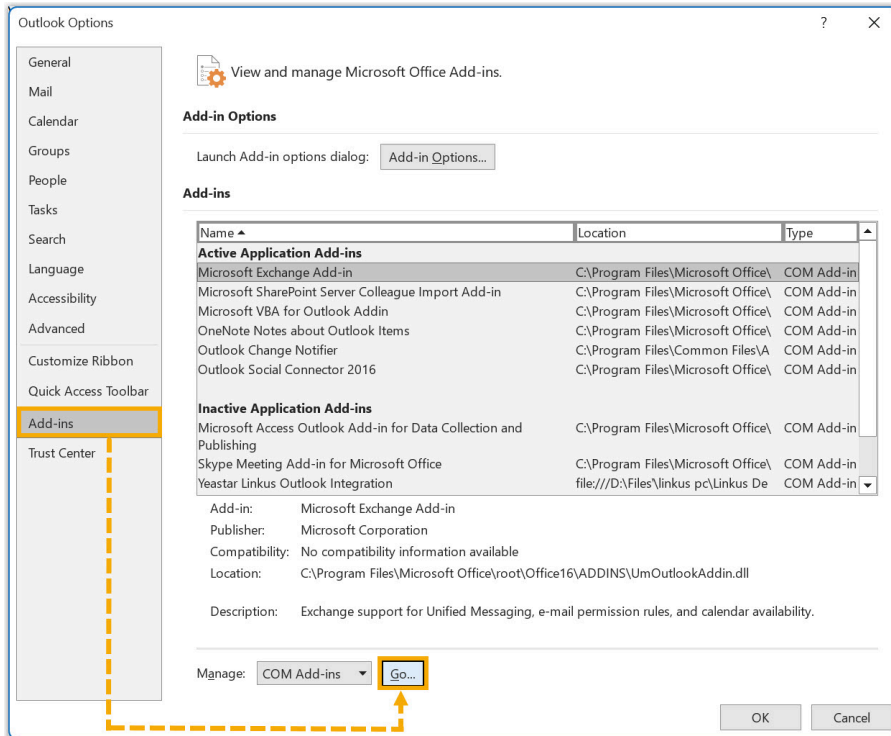

3. In the pop-up window, select the checkbox of **Yeastar Linkus Outlook Integration** and click **OK**.

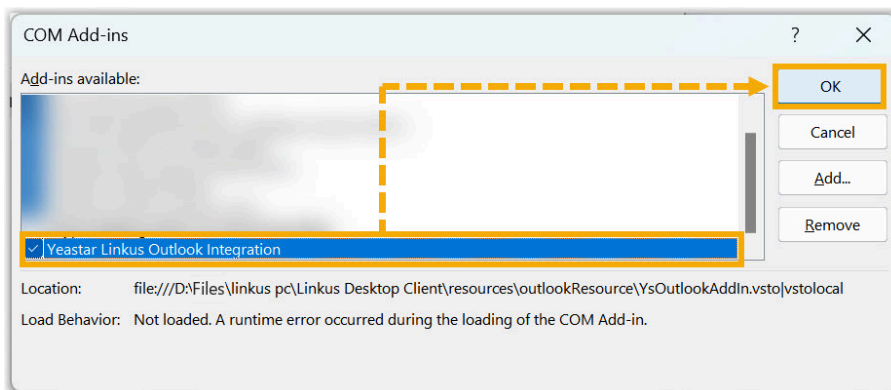

4. In the pop-up window, click **Install**.

## Result

- The integration of Linkus Desktop Client and Outlook for Windows is set up.
- You can [make phone calls and utilize call features within Outlook](#).

## Use Microsoft Outlook Integration

This topic shows the usage of the key features that can be achieved after integrating Linkus Desktop Client with Outlook for Windows.


### Make calls in Outlook

#### Prerequisites

Linkus Desktop Client stays logged in.


#### Procedure

On your Outlook contact list, right click a contact and select **Call with Linkus Desktop**, then decide which number you want to call. Linkus Desktop Client will automatically pop up and initiate the call.

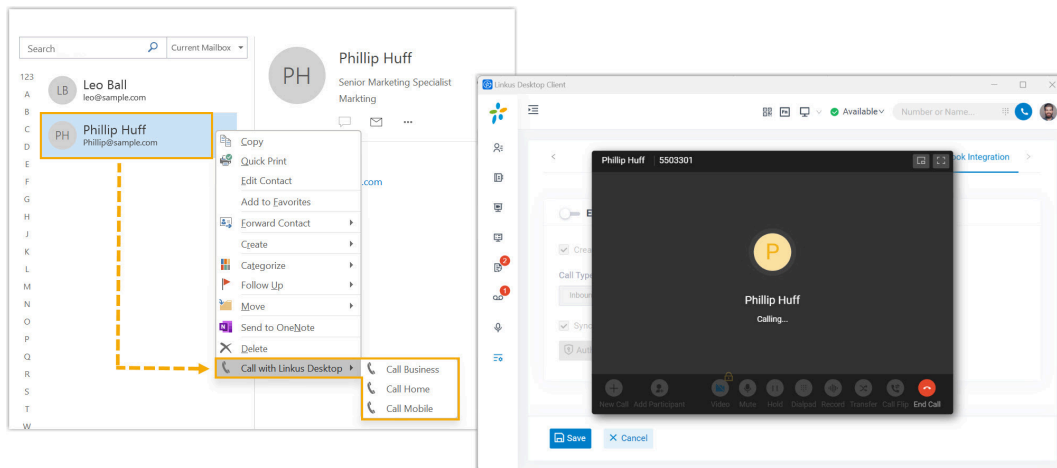

#### Note:

- You can also make calls to your Outlook contacts by right clicking the recipient or sender in an email.

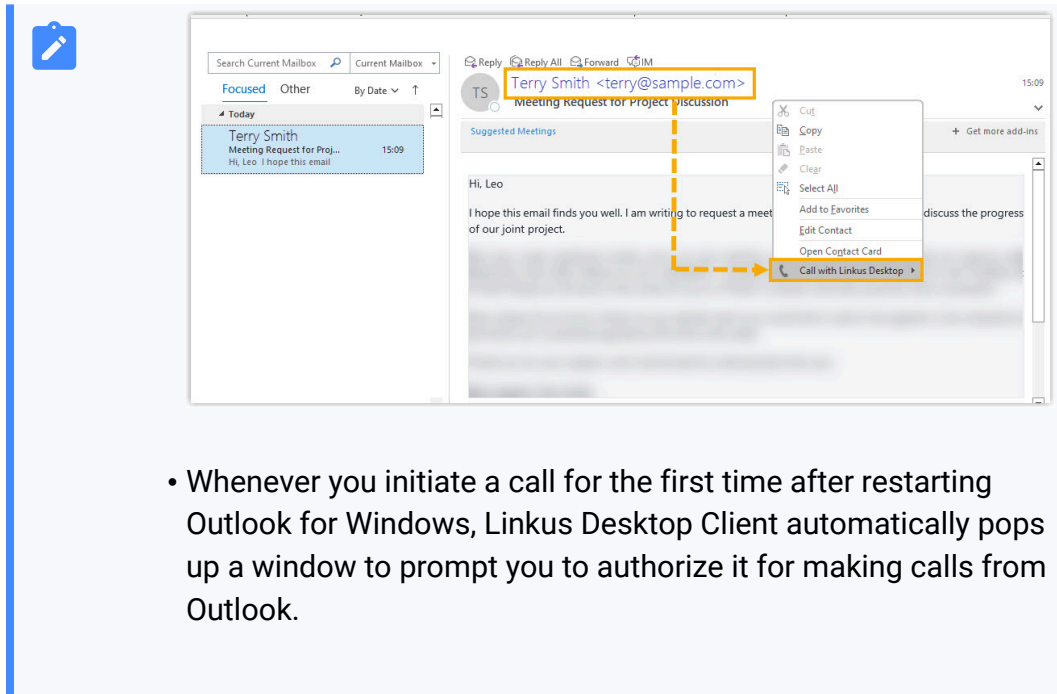A screenshot of the Microsoft Outlook interface. The main window shows an email from Terry Smith with the subject 'Meeting request for Project Discussion'. A context menu is open over the contact name 'Terry Smith <terry@sample.com>', with the option 'Call with Linkus Desktop' highlighted in orange. A dashed orange arrow points from the contact name to the highlighted menu item. The interface includes a search bar, navigation tabs for 'Focused' and 'Other', and a list of 'Suggested Meetings'.

- Whenever you initiate a call for the first time after restarting Outlook for Windows, Linkus Desktop Client automatically pops up a window to prompt you to authorize it for making calls from Outlook.


## Call Popup

### Prerequisites

Outlook for Windows stays logged in.

### Procedure

When you receive an inbound call from an Outlook contact, Outlook will pop up to show the contact's information.

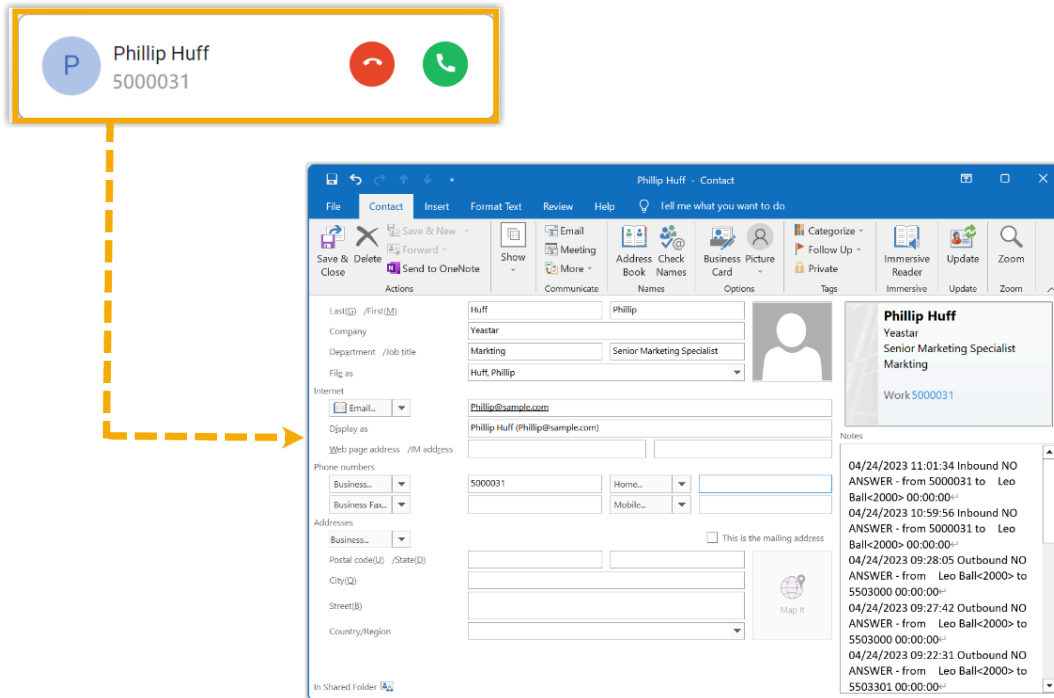

### Troubleshooting:

Linkus Desktop Client does NOT display the caller's name?

If the Linkus Desktop Client only displays the phone number when receiving calls from your Outlook contacts, you need to contact the system administrator to **synchronize your Outlook contacts to Linkus clients**.

## Call Journal

### Prerequisites


- Outlook for Windows stays logged in.
- You have [enabled call logs synchronization](#).

### Procedure

All outbound calls, inbound calls, and missed call histories with your Outlook contacts will be logged to Outlook automatically, which helps you to keep track of every conversation.

You can log in to Outlook, go to the **Notes** section in a contact editing page to view the call logs.



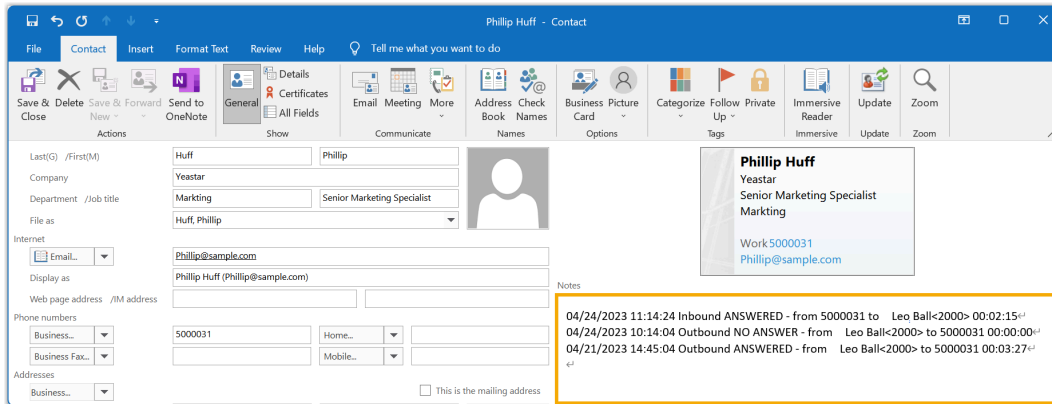


## Automatic Contact Creation

### Prerequisites

- Outlook for Windows stays logged in.
- You have [set up automatic contact creation](#).

### Procedure

When you receive or make calls with an unknown number that doesn't match an Outlook contact, Outlook automatically brings up the contact creation page and logs the phone number. You can update other details and save it as your Outlook contact.

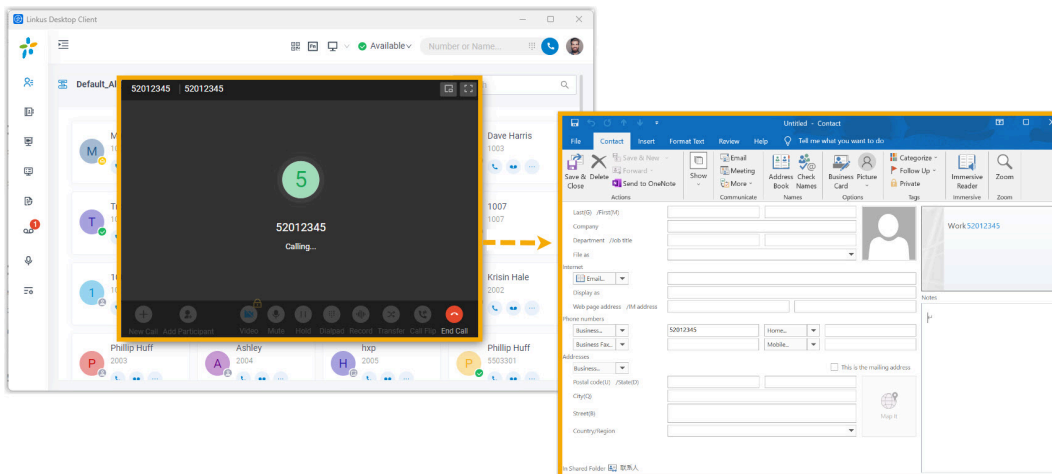


## Disable Microsoft Outlook Integration

This topic describes how to disable the integration of Linkus Desktop Client and Outlook for Windows.

## Step 1. Disable Outlook integration on Linkus Desktop Client


1. Log in to Linkus Desktop Client, go to **Preferences > Outlook Integration**.
2. Turn off the switch of **Enable Outlook Integration**.




3. Click **Save**.

## Step 2. Inactivate Linkus add-in on Outlook


1. Log in to Outlook, go to **File > Options**.

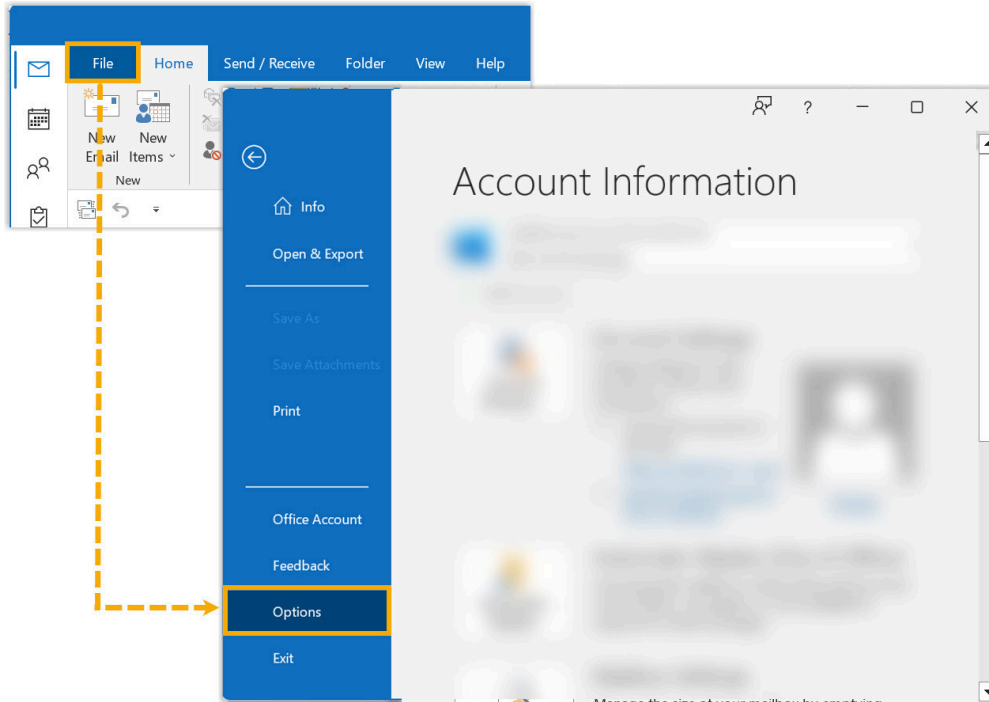

2. In the pop-up window, click **Add-ins** and click **Go...**

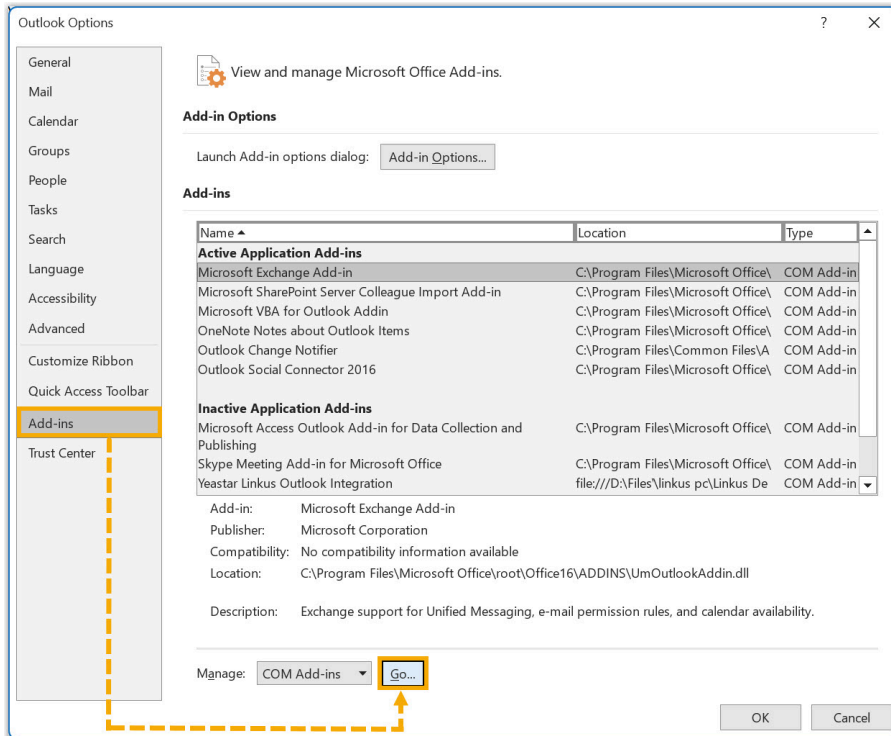

3. In the pop-up window, unselect the checkbox of **Yeastar Linkus Outlook Integration** and click **OK**.

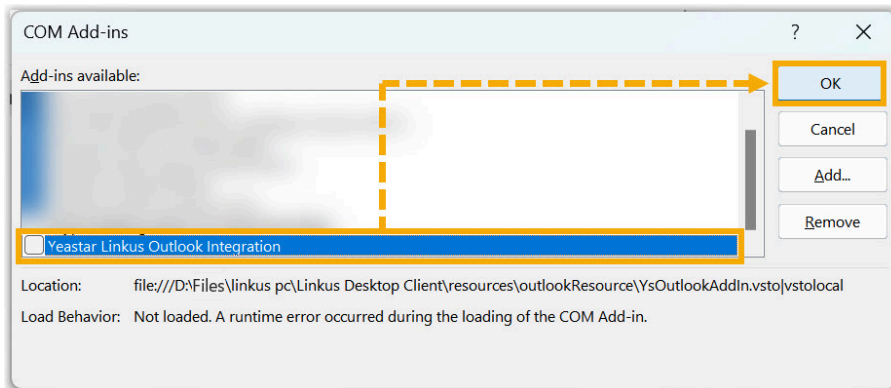

## Result

The integration of Linkus Desktop Client and Outlook is disabled, along with all the features provided by the Outlook integration.

# TAPI Integration

## Integrate Linkus Desktop Client with TAPI

Yeastar offers a TAPI software driver that can be installed on your PC to seamlessly integrate with your Linkus Desktop Client (Windows Desktop). This integration allows you to implement click-to-call directly from a variety of TAPI-enabled applications (such as your CRM application) using Linkus Desktop Client, eliminating the need for manual dialing of telephone numbers and thus enhancing productivity.

**Note:**

The TAPI integration is available for **Linkus Desktop Client (Windows Desktop)** only.


## Requirements

- **PBX Server:** Version 84.14.0.24 or later
- **Linkus Desktop Client (Windows Desktop):** 1.4.9 or later
- **Windows Operating System:** Windows 7, Windows 8, Windows 8.1, Windows 10, and Windows 11 (all 64-bit)

## Install the Yeastar TAPI driver


Download the TAPI driver on Linkus Desktop Client and install the driver on your PC.

1. Log in to Linkus Desktop Client, go to **Preferences > Integration**.
2. At the top-right corner of the **TAPI Integration** section, click **TAPI Driver Download**.

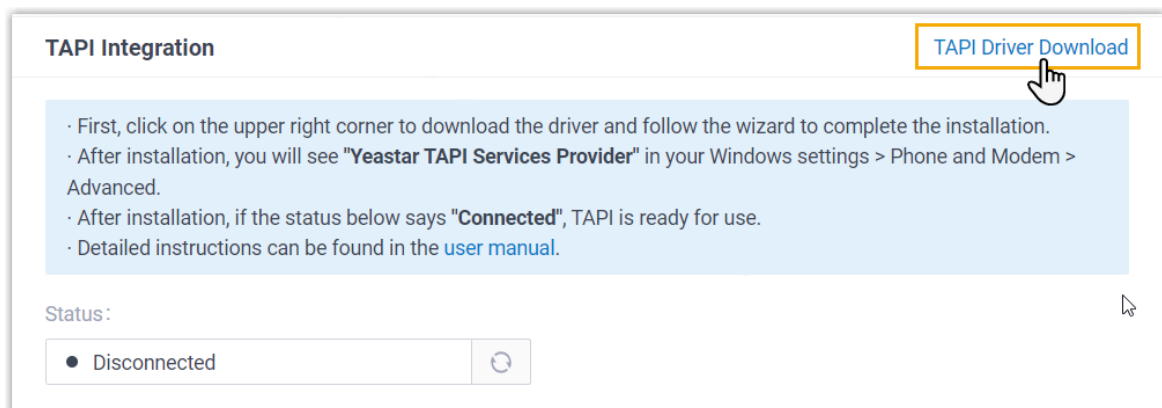


A **YeastarTAPISetup.exe** file is downloaded to your PC.

3. Open the **YeastarTAPISetup.exe** to install the TAPI driver.
  - a. Select the desired language.

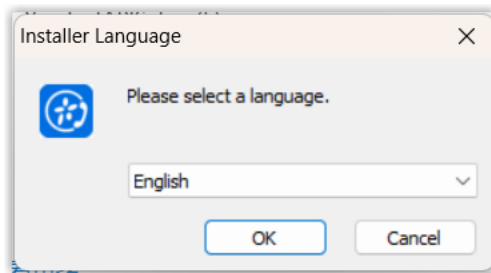


- b. Click **Install**.

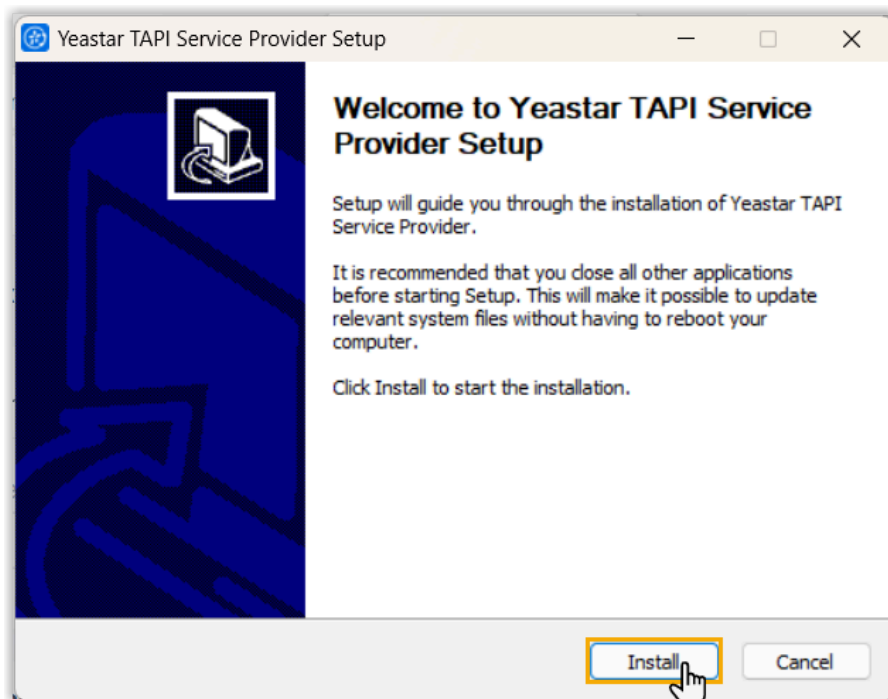

The TAPI driver installation starts.



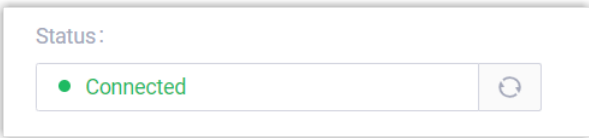
- c. When finished, click **Finish** to close the installer program.

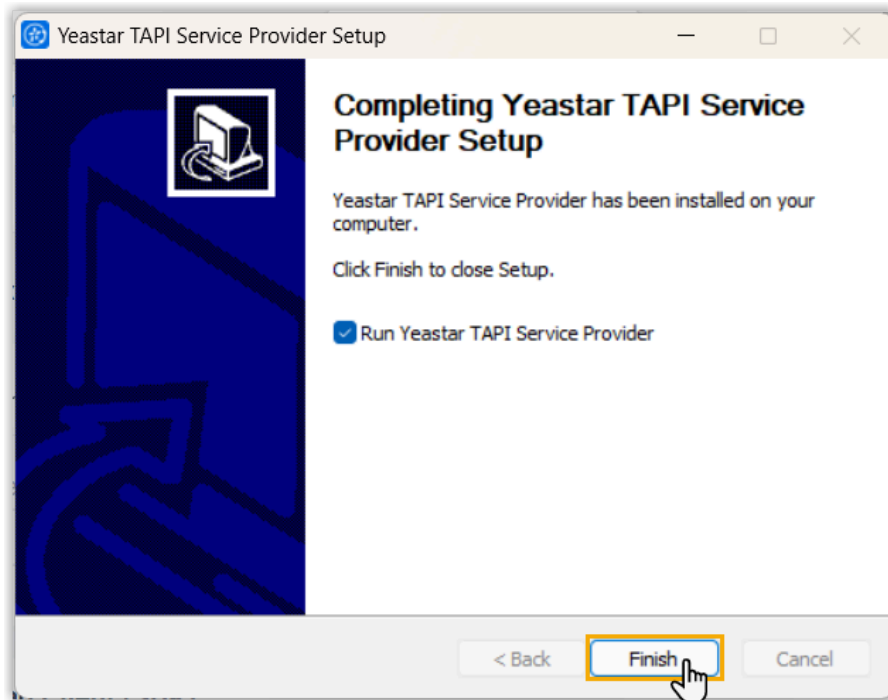

## Check the installation result of the Yeastar TAPI driver

You can check whether the Yeastar TAPI driver is installed successfully in the following methods.

Method	Instruction
Check the installation result on your PC	<ol style="list-style-type: none"> <li>1. Press <b>Win + R</b> to open the Run command window.</li> <li>2. Type <code>telephon.cpl</code> and press <b>Enter</b> to open the <b>Phone and Modem</b> window.</li> </ol> <p>Under the <b>Advanced</b> tab, if you see the <b>Yeastar TAPI Service Provider</b> displayed in the <b>Providers</b> list, it indicates that the Yeastar TAPI driver is installed successfully.</p>

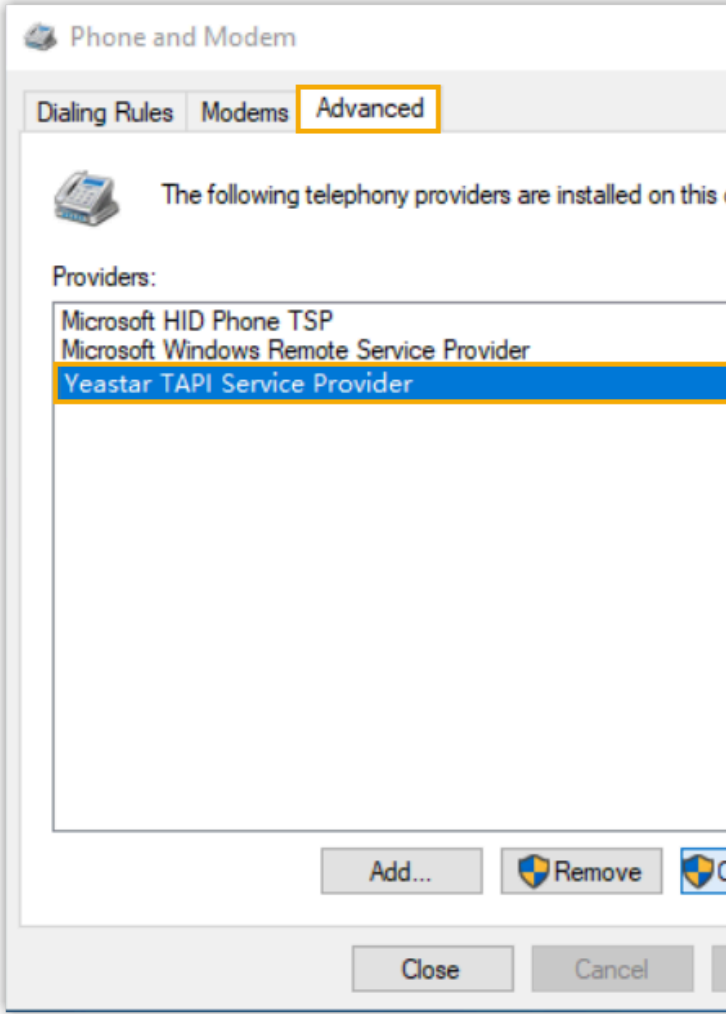
Method	Instruction
	
<p>Check the TAPI connectivity on Linkus Desktop Client</p>	<ol style="list-style-type: none"> <li>1. On Linkus Desktop Client, go to <b>Preferences &gt; Integration &gt; TAPI Integration</b>.</li> <li>2. In the <b>Status</b> field, click  to refresh the connection status.</li> </ol> <p>If the status is displayed as <b>Connected</b>, it indicates that the Yeastar TAPI driver is installed successfully.</p> 

## Make a test call via Yeastar TAPI driver

Make a test call to verify whether the Yeastar TAPI driver is operational. In this example, we use the Windows **Dialer** app to show how to make a call via Yeastar TAPI driver.

### Prerequisites

- You have logged in to Linkus Desktop Client.
- The **Dial out immediately** setting on Linkus Desktop Client has been enabled.

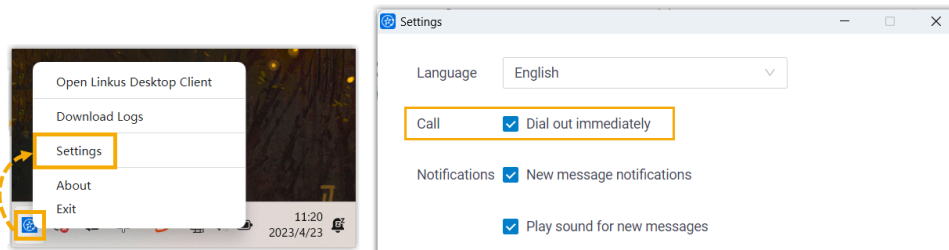


- If you have set up default calling app to other driver or app for your PC before, you need to change it to Linkus.

For more information, see [How to set Linkus as the default calling app.](#)


### Procedure

1. On your PC, press **Win + R** to open the Run command window.
2. Type `dialer.exe`, then press **Enter** to open the **Phone Dialer** window.
3. On the top menu, click **Tools**, then select **Connect Using...**



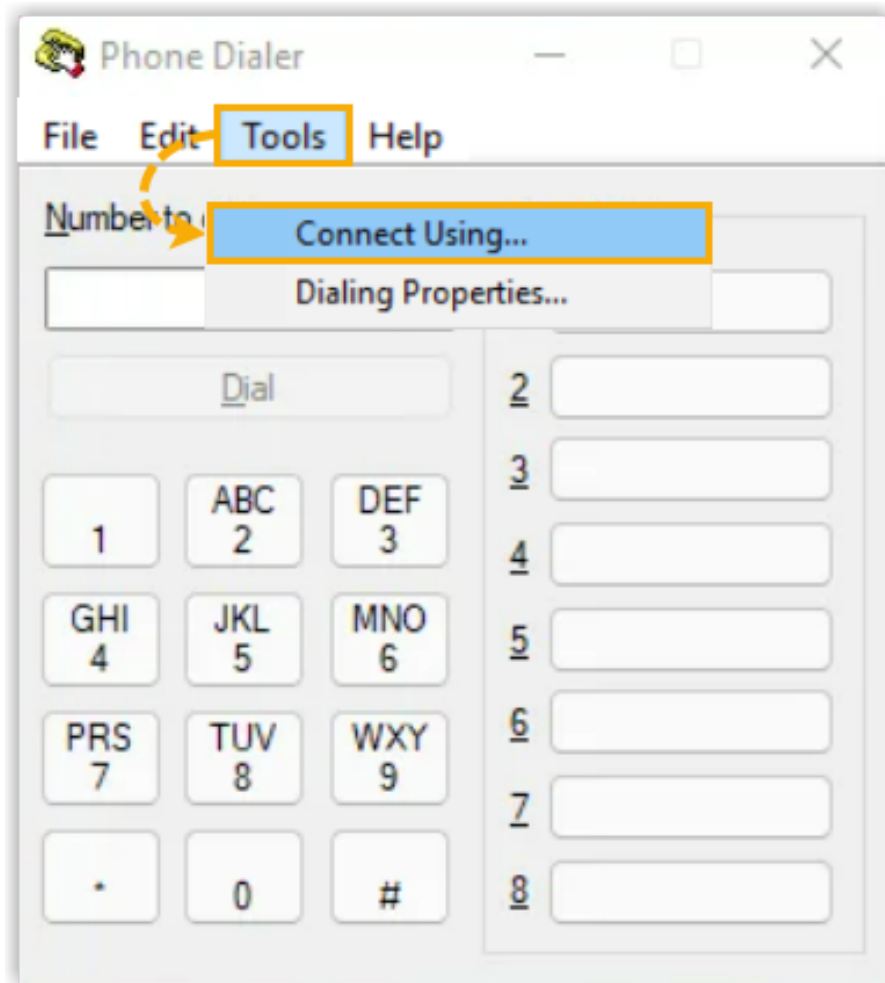


4. In the **Line** drop-down list, select **Yeastar TAPI Service Provider**, then click **OK**.

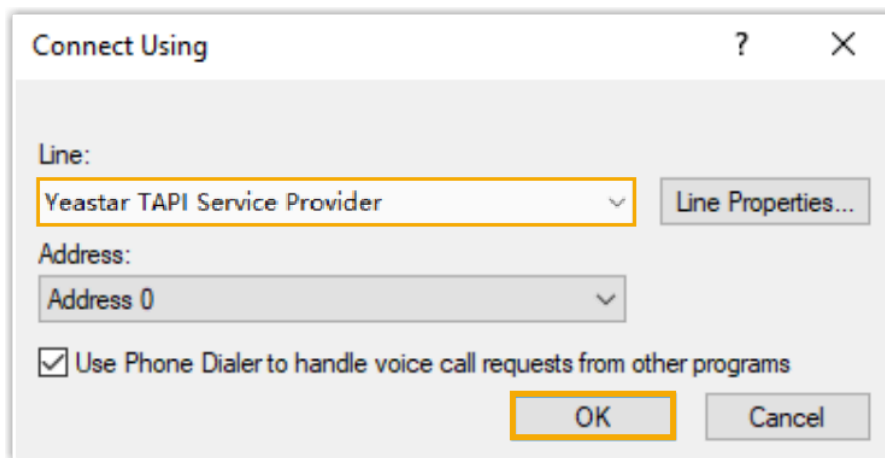

In this way, numbers dialled in the **Dialer** will be called out through this line.

5. In the **Number to dial** field, enter a phone number and click **Dial**.

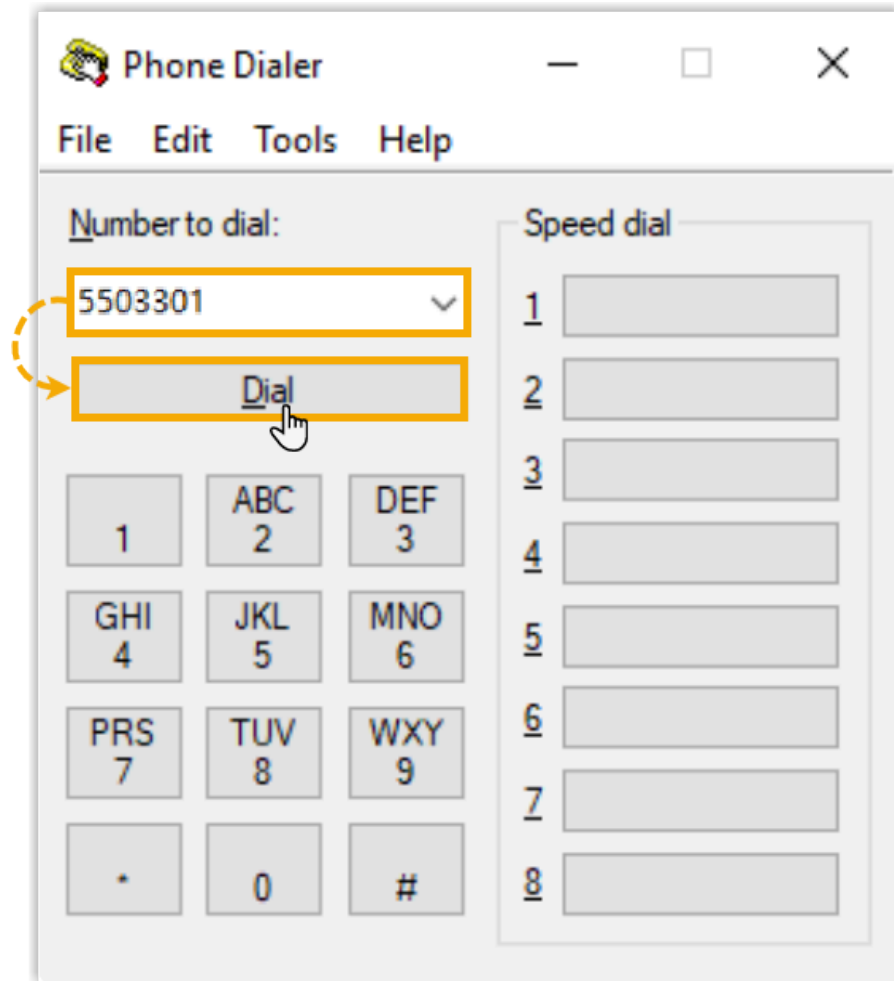

Linkus Desktop Client is launched, initiating an outgoing call.

