

Yeastar TA100/200 FXS Gateway Integration Guide

Yeastar P-Series Cloud Edition

Version: 1.0

Date: 2024-07-08



Contents


Overview.....	1
Connect Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS Gateway.....	3
Make Outbound Calls from an Analog Phone Connected to Yeastar TA100/200 FXS Gate- way.....	6
Receive Inbound Calls on an Analog Phone Connected to Yeastar TA100/200 FXS Gate- way.....	8

Yeastar TA100/200 FXS Gateway Integration Guide

This guide provides a configuration example to describe how to extend analog phones for Yeastar P-Series Cloud Edition.

Test environment

The instructions provided in this guide are based on the following test environment:

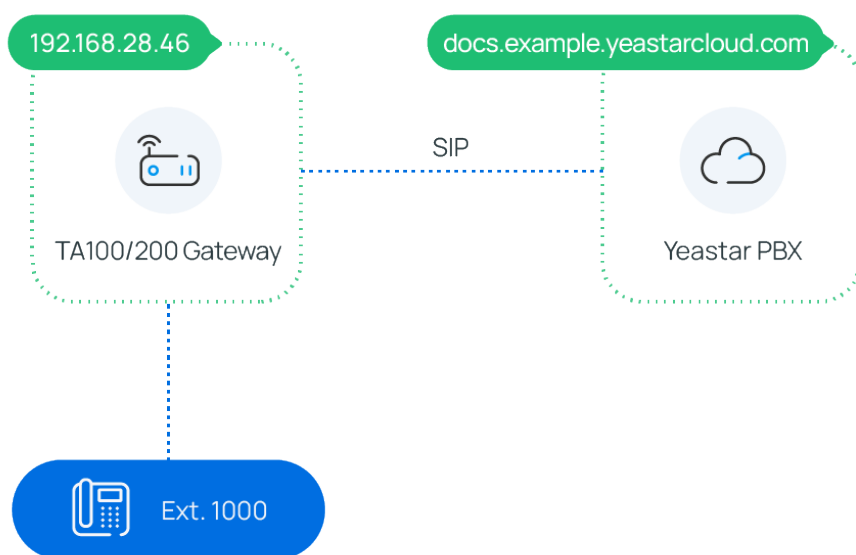

Equipment	Firmware Version	IP Address/Domain Name
Yeastar P-Series Cloud Edition	84.14.0.24	docs.example.yeastarcloud.com
Yeastar TA100/200 FXS Gateway	44.19.0.30	192.168.28.46

Objectives

This guide provides instructions based on the above test environment to help you achieve the following objectives:

- [Connect Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS Gateway](#)

- [Make Outbound Calls from an Analog Phone Connected to Yeastar TA100/200 FXS Gateway](#)
- [Receive Inbound Calls on an Analog Phone Connected to Yeastar TA100/200 FXS Gateway](#)

Connect Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS Gateway

This topic describes how to connect Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS gateway, so as to extend analog phone(s) for the PBX.


Procedure

- [Step 1. Create an extension on Yeastar PBX](#)
- [Step 2. Register the extension with FXS port on Yeastar TA100/200 FXS gateway](#)

Step 1. Create an extension on Yeastar PBX

On Yeastar P-Series Cloud Edition, create an extension for an FXS port on the gateway.

1. Log in to PBX web portal, go to **Extension and Trunk > Extension**.
2. Click **Add** to create an extension. In this example, create extension 1000.

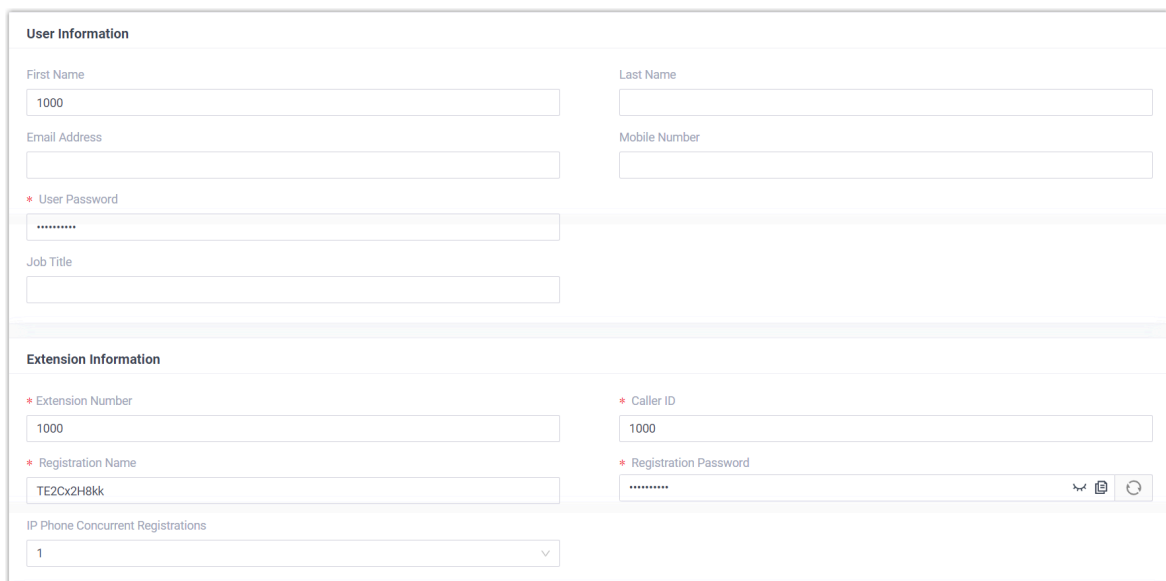

The screenshot shows a web form for creating a new extension. It is divided into two main sections: 'User Information' and 'Extension Information'. The 'User Information' section includes fields for First Name (1000), Last Name, Email Address, Mobile Number, User Password (masked with asterisks), and Job Title. The 'Extension Information' section includes fields for Extension Number (1000), Caller ID (1000), Registration Name (TE2Cx2H8kk), and Registration Password (masked with asterisks). There are also icons for help, save, and refresh. At the bottom, there is a dropdown menu for 'IP Phone Concurrent Registrations' set to 1.

3. Click **Save** and **Apply**.

Step 2. Register the extension with FXS port on Yeastar TA100/200 FXS gateway

On Yeastar TA100/200 FXS gateway, register an FXS port as a PBX extension.

1. Log in to gateway web interface, go to **Gateway > Port Settings > FXS Port**, edit an FXS port.
2. In the pop-up window, configure the following settings:

Edit FXS Port - 1

Basic | Advanced | FXS Settings | Dial Plan

Register Mode ⓘ : Port Register ▼

Caller ID Name ⓘ : 1000

Caller ID Number ⓘ : 1000

User Name ⓘ : 1000

Authentication Name ⓘ : TE2Cx2H8kk

Password ⓘ :

From User ⓘ : 1000

DID Number ⓘ : 1000

Transport: UDP ▼

Hostname/IP: docs.example.yeastarcloud.com : 5060

Domain: docs.example.yeastarcloud.com

Authenticating Incoming Call ⓘ : No ▼

Realm ⓘ :

☐ Enable Outbound Proxy Server

Failover Hostname/IP: : 5060

☒ Save ☐ Cancel

- **Register Mode:** Select **Port Register**.
- **Caller ID Name:** Enter a name to help you identify the FXS port.
- **Caller ID Number:** Enter the extension number.
- **User Name:** Enter the extension number.
- **Authentication Name:** Enter the extension's registration name.
- **Password:** Enter the extension's registration password.
- **From User:** Enter the extension number.
- **DID Number:** Enter the extension number.
- **Transport:** Select **UDP**.
- **Hostname/IP:** Enter the PBX's domain name and SIP port.

- **Domain:** Enter the PBX's domain name.
3. Click **Save** and **Apply Changes**.

Result

- The extension is successfully registered with the FXS port. You can check the registration status on PBX web portal and gateway web interface.

- On PBX web portal, go to **Extension and Trunk > Extension** to check the extension status. If the registration is successful, the extension status will display



☐	Online Status	Presence ▾	Extension Number ▾	Caller ID Name ▾	User Role	Email Address ▾	Mobile Number ▾	Operations ▾
☐		Available	1000	1 1000				

- On gateway web interface, go to **Status > System Status > FXS Port Status** to check the FXS port status. If the registration is successful, the port status will display "OK".

FXS Port Status					
Port	UP/Down/Break	Name	Status	Voice Mail(New/Old)	Off-hook/On-hook
1	Up	1000	OK	—	On Hook

- Now the analog phone connected to the FXS port can be used to make and receive internal calls.

What to do next

- To make outbound calls from the analog phone, see [Make Outbound Calls from an Analog Phone Connected to Yeastar TA100/200 FXS Gateway](#).
- To receive inbound calls on the analog phone, see [Receive Inbound Calls on an Analog Phone Connected to Yeastar TA100/200 FXS Gateway](#).

Make Outbound Calls from an Analog Phone Connected to Yeastar TA100/200 FXS Gateway

After connecting Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS gateway, you can set up an outbound route on PBX to allow users to make outbound calls from the connected analog phone using PBX trunk.

Procedure

- [Step 1. Create an outbound route on Yeastar PBX](#)
- [Step 2. Make a test call from the analog phone](#)

Step 1. Create an outbound route on Yeastar PBX

On Yeastar P-Series Cloud Edition, create an outbound route and assign permission to the extension that has been registered with an FXS port on the gateway.

1. Log in to PBX web portal, go to **Call Control > Outbound Route**, click **Add**.
2. Configure the following settings.

- **Name:** Enter a name to help you identify the outbound route.
- **Dial Pattern:** Set the dial pattern according to your needs.

In this example, set **Pattern** to 9., and set **Strip** to 1. Users should dial prefix 9 before the target number. For example, to call number 15880123456, users should dial 915880123456.

* Pattern	Strip	Prepend	Operations
9.	1		

- **Trunk:** Select a trunk.
- **Extension / Extension Group:** Select the extension(s) that are allowed to make outbound calls via this route. In this example, select extension 1000.

Extension / Extension Group

7 items

Available

Search here

Extension Number

Caller ID Name

Extension Group

Default_All_Extensions

1001

1001

1002

1002

1003

1003

1004

1004

1005

1005

>

<

1 item

Selected

Search here

Extension Number

Caller ID Name

1000

1000

3. Click **Save** and **Apply**.

Step 2. Make a test call from the analog phone

For example, dial 915880123456 on the analog phone, the user 15880123456 will ring.

Receive Inbound Calls on an Analog Phone Connected to Yeastar TA100/200 FXS Gateway

After connecting Yeastar P-Series Cloud Edition and Yeastar TA100/200 FXS gateway, you can set up an inbound route to allow users to receive inbound calls from PBX trunk on the connected analog phone.


Procedure

- [Step 1. Create an inbound route on Yeastar PBX](#)
- [Step 2. Make a test call to the analog phone](#)

Step 1. Create an inbound route on Yeastar PBX

On Yeastar P-Series Cloud Edition, create an inbound route and set the destination to the extension that has been registered with the FXS port on the gateway.

1. Log in to PBX web portal, go to **Call Control > Inbound Route**, click **Add**.
2. Configure the following settings.
 - **Name:** Enter a name to help you identify the inbound route.
 - **Trunk:** Select a trunk.
 - **Default Destination:** Select a destination for the inbound route. In this example, select extension 1000.

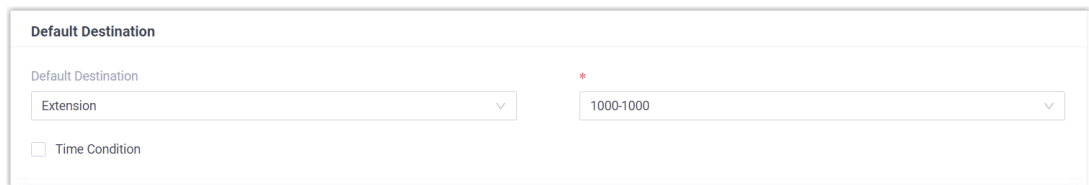

Default Destination

Default Destination

Extension

1000-1000

☐ Time Condition

3. Click **Save** and **Apply**.

Step 2. Make a test call to the analog phone

For example, make a call to the trunk, the analog phone with extension 1000 registered will ring.